VIEWBOARDS

ViewBoard IFP7550-5F


Toets **Features**

- Ultra Fine Touch Technology offering up to 40-point touch for a pen-on-paper writing experience
- myViewBoard Whiteboard software with engaging classroom tools
- Screen share via USB-C or wirelessly via myViewBoard Display and ViewBoard Cast with Airplay and Chromecast
- Intuitive remote device control and multimedia broadcast with myViewBoard Manager
- Android 11 OS powered by an octa-core CPU for optimized efficiency and security (Upgradable to Android 13)



Product **Omschrijving**

Designed with modern educators in mind, the ViewBoard® 50-5F Series offers an intuitive and interactive interface for a multi-user writing experience. With a single-cable USB-C for instant, worry-free connectivity, teachers can seamlessly plug-in and control their devices while continuing the lesson. Both students and educators enjoy smooth writing with Ultra Fine Touch Technology offering 40-point touch, and the dual-pen that comes in a range of colors and sizes. Rest assured you and your students' eyes are cared for and protected as the ViewBoard® 50-5F Series comes with Flicker-Free technology and an integrated TÜV certified blue light filter for all brightness levels. Fully integrated with the myViewBoard suite, the ViewBoard® 50-5F Series brings together hardware and software for a complete classroom solution. Compatible with a full line of accessories, the ViewBoard® 50-5F Series enables you to effectively teach with a variety of engaging tools.

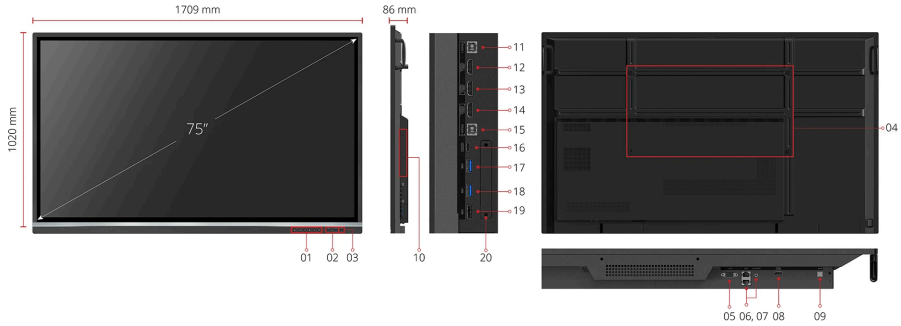

1. Menu Control
2. USB 3.0
3. USB 2.0
4. VESA® Wall Mount (800x400mm)
5. RS-232
6. LAN
7. AUDIO OUT
8. HDMI OUT
9. SPDIF
10. OPS Slot
11. TOUCH 1
12. HDMI 1
13. HDMI 2
14. HDMI 3
15. TOUCH 2
16. USB Type-C
17. USB 3.0
18. USB 3.0
19. USB 2.0
20. Wi-Fi Module Slot

Bezoek Gebruikers

www.viewsonic.com

DISPLAY

Paneelgrootte:	75"
Paneeltype:	TFT LCD Module with DLED Backlight. IPS
Weergavegebied (mm):	1650.24(H) × 928.26(V)
Aspectratio:	16:9
Resolutie:	UHD 3840x2160
Colors:	1.07B colors (10bit)
Helderheid:	500 nits
Contrastverhouding:	1200:1 (typ.) 6000:1 (DCR)
Reactietijd:	8ms
Kijkhoeken:	H = 178, V = 178 typ.
Levensduur achtergrondverlichting:	50,000 hours(Min)
Oppervlakte behandeling:	Hardness: 7H, Anti-glare coating
Bezel:	Slim
Oriëntatie:	Landscape
Disclaimer:	50,000 hours backlight life at 8 hours of use per day

PLATFORM

Processor:	ARM Cortex-A73*4 + Cortex-A53*4
RAM:	8GB
Opslag:	64GB

TOUCH

Type:	Ultra Fine Touch Techology (IR Recognition)
Touch resolutie:	32768 ×32768
Touch punt:	Windows: 40 points of touch, Android : 20 points of touch

INPUT

HDMI:	2.0 x 3 (3840x2160 @60Hz, HDCP2.2, HDMI1 with CEC/ARC) with audio signal transmission
RS232:	x1
OPS:	x1
WiFi:	x 1 module slot

OUTPUT

HDMI:	x1 (4K@60Hz)
Audio:	x1 (Earphone out)
SPDIF:	x1 (optical)

LAN

RJ45:	x2

USB

Type A:	2.0 x 2 3.0 x 4
Type B:	x2, for touch
Type C:	x1 (DP 1.2, USB2.0, PD65W, Ethernet 100M) with audio signal transmission

SPEAKERS

INGESLOTEN BESTURINGSSYSTEEM

Android 11 (upgradable to Android 13)

BUNDELSOFTWARE

Basis annotatiesoftware:	myViewBoard
Pro annotatiesoftware:	myViewBoard for Windows (Embedded in Windows Slot-in PC)
Draadloze presentatie:	vCast/myViewBoard Display App

SPECIALE EIGENSCHAPPEN

All-in-one USB port:	“SmartPort™ USB” to all channels.
Eenvoudig delen via LAN tussen IFP en slot-in-apparaat:	Yes
Light Sensor:	Yes

STROOM

Spanning:	100-240VAC +/- 10% Wide Range
Consumptie:	124W(typ.), 0.5W (off)

ERGONOMICS

Wandmontage (VESA®):	800 mm x 400 mm

OPERATING CONDITIONS

Temperatuur (° C):	0°C to 40°C
Luchtvochtigheid:	10% ~ 90% RH non-condensing

AFMETINGEN (B X H X D)

Fysiek (inch/mm):	67.28 x 40.16 x 3.39 in / 1709 x 1020 x 86 mm
Verpakking (inch / mm):	73.35 x 44.88 x 8.86 in / 1863x 1140 x 225 mm

WEIGHT

Netto (lb / kg):	117.73lb/53.4kg
Bruto (lb/kg):	151.9lb/68.9kg

REGULATIONS

cTUVus, FCC/ICES003, Energy Star 8.0, EMC/CE, CB/LVD, GOST-R/EAC, UkrSEPRO, EPEAT, Mexico NOM , Mexico Energy, UKCA, UK-EEL, BSMI, BIS, LBL(Low Blue Light Certification), Flicker Free, Green BOM, RoHS, ErP-Eco, REACH, SCIP, WEEE, TPCH , Packing waste, CA65, PAIA

VERPAKKINGSINHOUD

1. Power cord
2. Remote control with AAA battery
3. Touch USB cable
4. Touch pen x 2

(VB-PEN-009)

5. Quick Start Guide + Compliance statement
6. RS232 adapter
7. Clamp x 5
8. Camera Plate
9. Screw x 8
10. HDMI cable

20W x 2 + 20W x 1 subwoofer

TOP CAMERA PLATE

Yes

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.