



Justrite Safety Group

575 De-Flex[®] Nitrile FR

Nitrile FR mat with dual locking connection system



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 575 De-Flex® Nitrile FR

Extremely comfortable heavy duty anti-fatigue matting system with popular diamond plate traction surface that can be easily assembled for coverage of large areas or individual workstation mats.

- Modular rubber tiles are designed with a universal double-locking system on all sides to ensure an extra strong yet seamless connection for fast installation
- The 19 mm thick platform insulates the worker from the hard ground while the bulleted domes underneath allow the mat to bend and flex with every movement
- Unique extended ramp prevents tripping and allows cart access with smart bevelling solutions for inside and outside corners

Recommended use

- Wet/Dry and Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:


- Black

Sizes:

- 45cm x 45cm
- 45cm x 45cm

Accessories:

- 571 De-Flex® Safety Ramp Nitrile
- INS INSTALLATION

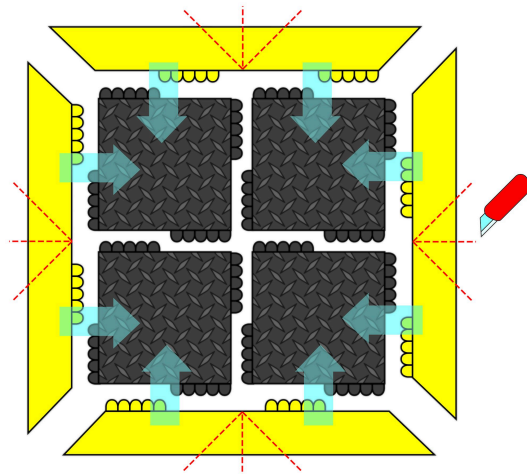

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting De-Flex® Nitrile FR

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	575
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	De-Flex® Nitrile FR
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	De-Flex®
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Warranty	1

Tests

Fire rating EU	EN 13501-1 Bfl-S1
----------------	-------------------

Technical Specifications

Application	Industrial Environments
Edges	Attachable bevelled edges are available
Material	100% nitrile fire retardant rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding

De-Flex™ Nitrile FR Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
575B1818BL	45cm x 45cm	26.4	19
575S1818BL	45cm x 45cm	3.3	19

Accessories

571 De-Flex® Safety Ramp Nitrile INS INSTALLATION