


gpa.dk

ER FAIL - Elektrisk aktuator med batteri backup

Teknisk specifikation

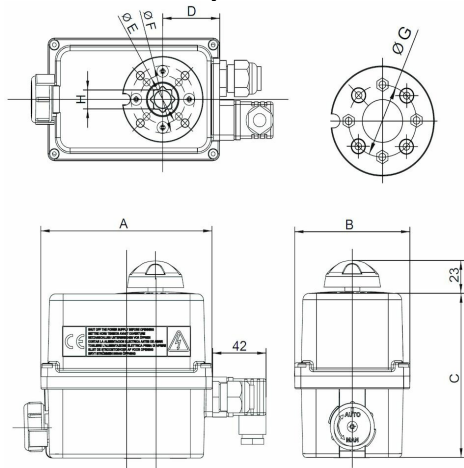

Artikelnr	Flange	Nm	Spænding	Effekt	nedetid sek.
ER010P-FS-024	F03-F04-F05/14mm	10	12-24v ac/dc	15 W	11
ER010P-FS-230	F03-F04-F05/14mm	10	100-240v ac	15 W	11
ER020P-FS-024	F03-F04-F05/14mm	20	12-24v ac/dc	15 W	12
ER020P-FS-230	F03-F04-F05/14mm	20	100-240v ac	15 W	12
ER035P-FS-024	F05-F07/22mm	35	12-24v ac/dc	45 W	7
ER035P-FS-230	F05-F07/22mm	35	100-240v ac	45 W	7
ER060P-FS-024	F05-F07/22mm	60	12-24v ac/dc	45 W	12
ER060P-FS-230	F05-F07/22mm	60	100-240v ac	45 W	12
ER100P-FS-024	F05-F07/22mm	100	12-24v ac/dc	45 W	22
ER100P-FS-230	F05-F07/22mm	100	100-240v ac	45 W	23

Med forbehold om konstruksjonsendringer og tekniske endringer. Kan endres uten varsel

GPA Flowsystem A/S

Paul Bergsøes Vej 8

DK-2600 Glostrup

+45 43-86 03 00

info@gpa.dk

gpa.dk