

556 Cushion Ease Solid™

Heavy duty modular rubber tiles



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 556 Cushion Ease Solid™

Ergonomic benefit derived from a 19 mm thick worker platform with a closed anti-slip pebble structure surface for maximum anti-fatigue comfort in dry industrial environments.

- Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations, wall-to-wall or as islands
- 100% natural rubber compound
- Compatible with patented MD Ramp System™ for smart safety beveling solutions; allows outside and inside corners

Recommended use

- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:



- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- 552 MD-X Ramp System™ Nitrile
- INS Installation Service Available on Request
- 651 M.D. Fire Retardant Ramp System
- 551 MD Ramp System™ Nitrile

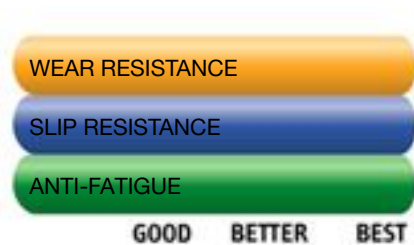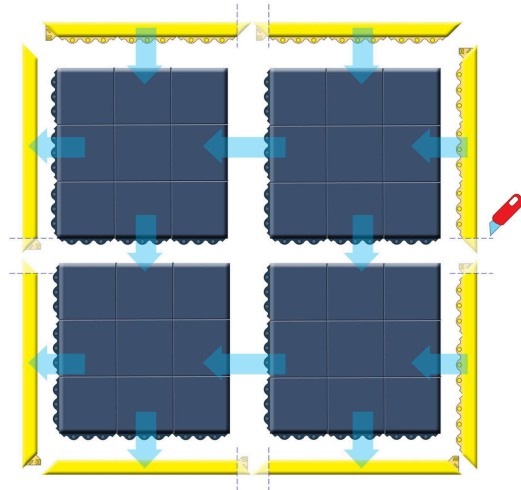

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Cushion Ease Solid™

General

| | |
|-------------------|---|
| Brand | Notrax |
| Category | Dry Areas Modular Matting |
| Product Number | 556 |
| Product Family | Industrial & Commercial Matting |
| Product Group | Ergonomic, Anti-fatigue & Safety Matting |
| Product Name | Cushion Ease Solid™ |
| Recommended use | For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations. |
| Series | Cushion-Ease® |
| Shipping Location | Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States |
| Type | Dry Areas - Heavy Duty Modular Rubber Mats |
| Update trigger | 20210310-1301 |
| Usage Intensity | Heavy duty |

Sustainability

| | |
|------------------|---|
| REACH | Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals). |
| Recycled | True |
| Rohs US | Rohs compliant (Restriction of Hazardous Substances). |
| Sustainability | Recyclable material, Made from recycled material |
| Warranty (years) | 1 |

Tests

| | |
|----------------------------|----------------------------------|
| Abrasion Resistance 1000 | 2.90g (5000 cycles) |
| Compression Deflection 1.4 | 33.3 lb/in ² (at 25%) |
| Compression Deflection 2.8 | 33.3 lb/in ² (at 50%) |
| Fire rating US | Pass |
| Hardness | 67 Shore A |
| Slip Rating | R9 |
| Coefficient Friction Dry | 0.68 |
| Surface Flammability | Pass |
| Tear Strength | 55.4 lb |

Technical Specifications

| | |
|-------------------|---|
| Application | Industrial Environments |
| Breaking Load | 44 lb |
| Edges | Attachable bevelled edges are available |
| Material | Natural rubber |
| Material Group | Natural rubber |
| Process | Compression Moulding |
| Temperature Range | - 40 ° C up to + 120 ° C |

Cushion Ease Solid™ Black

| Art. nr. | Dimension (cm) | Weight (kg) | Thickness (mm) | Recommended accessories |
|------------|----------------|-------------|----------------|-------------------------|
| 556S0000BL | per m2 | 13.6 | 19 | INSTALL004 |
| 556S0033BL | 91cm x 91cm | 12.7 | 19 | |

Accessories

552 MD-X Ramp System™ Nitrile INS Installation Service Available on Request 651 M.D. Fire Retardent Ramp System 551 MD Ramp System™ Nitrile