


452 Skywalker® PUR ESD

ESD polyurethane mat with bubble pattern

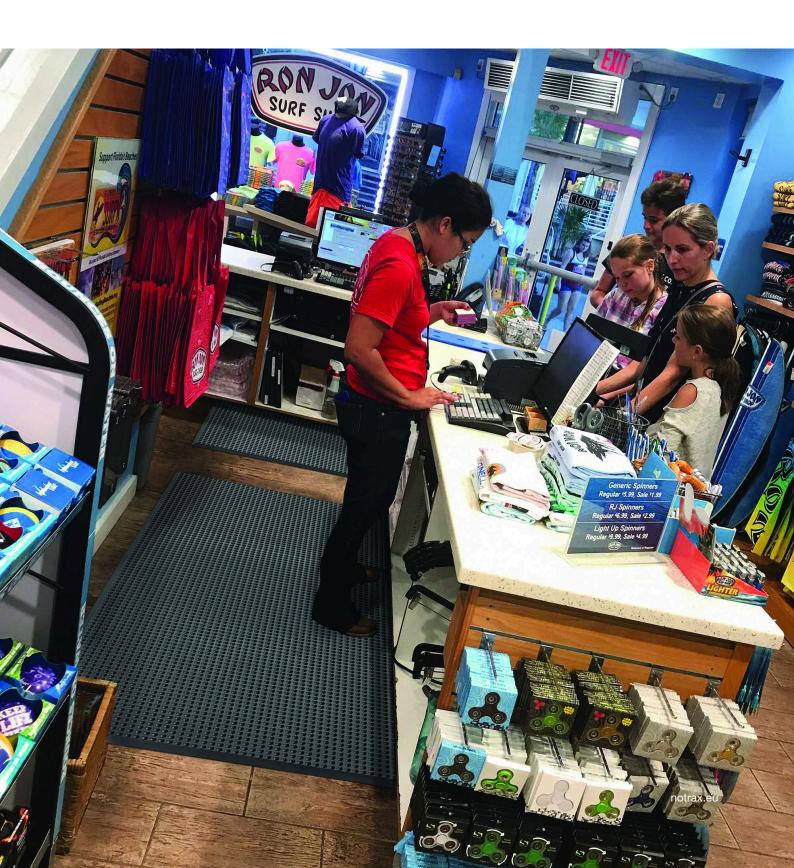

Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories 452 Skywalker® PUR ESD

High quality polyurethane foam anti-fatigue mats are reputed for their ultimate comfort in stationary standing positions.

- All four sides have bevelled edges to minimize tripping hazards
- Environmental friendly, produced without use of organic carbon-based blowing agents
- Ergonomically designed bubble surface provides traction and fatigue relief



- Dry Areas
- Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, wait stations, service counters, cashiers
- Medium duty



Black

Sizes:

- 65cm x 140cm
- 65cm x 185cm
- 65cm x 95cm
- 95cm x 125cm
- 95cm x 155cm
- 95cm x 185cm















Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories $Skywalker^{®}$ PUR ESD

General

| Brand | Notrax | | |
|-------------------|--|--|--|
| Category | ESD Matting & Accessories | | |
| Product Number | 452 | | |
| Product Family | Industrial & Commercial Matting | | |
| Product Group | Ergonomic, Anti-fatigue & Safety Matting | | |
| Product Name | Skywalker® PUR ESD | | |
| Recommended use | Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, wait stations, service counters, cashiers | | |
| Shipping Location | Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands | | |
| Туре | Dry Areas - Medium Duty Polyurethane Mats | | |
| Update trigger | 20210310-1301 | | |
| Usage Intensity | Medium duty | | |

Sustainability

| REACH | Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals). | |
|----------------|---|--|
| Recycled | False | |
| Sustainability | Recyclable material | |
| Warranty | 1 | |

Tests

| Abrasion Resistance 1000 | 150 mg (2.5N) |
|--------------------------|--|
| Elongation | 300% |
| ESD Rg | Rp 10 ⁶ - 10 ⁹ Ω |
| ESD Rp | Rg 10 ⁶ - 10 ⁹ Ω |
| Hardness | 25 Shore A |
| Slip Rating | R10 |
| Surface Flammability | Pass |
| Tear Strength | 1.7 N/mm |

Technical Specifications

| Application | Industrial Environments | |
|-------------------|-----------------------------|--|
| Edges | Bevelled edges on all sides | |
| Material | Nitrile rubber blend | |
| Material Group | Polyurethane | |
| Process | Injection Moulding | |
| Temperature Range | - 40 ° C up to + 120 ° C | |

Skywalker® PUR ESD Black

| Art. nr. | Dimension (cm) | Weight (kg) | Thickness (mm) |
|------------|----------------|-------------|----------------|
| 452S0023BL | 65cm x 95cm | 3 | 14 |
| 452S0034BL | 95cm x 125cm | 5.2 | 14 |
| 452S0026BL | 65cm x 185cm | 5.8 | 14 |
| 452S0036BL | 95cm x 185cm | 8.4 | 14 |
| 452S0035BL | 95cm x 155cm | 7.3 | 14 |
| 452S2454BL | 65cm x 140cm | 4.2 | 14 |