


AXON

LED RETIL

Unidirectional Inset
8-inch and 12-inch

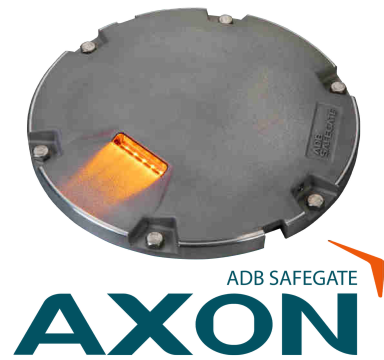

Compliance with Standards (current Version)

ICAO	Annex 14, Volume 1
NATO	STANAG 3316
IEC	61827
Canada	TP 312
Australia	MOS 139
CE	

Uses

ICAO

- Rapid Exit Taxiway Indicator Light (RETIL)

Features and Benefits

Efficiency

- EQ has an integrated ILCMS remote for use with the 360 system providing high data capacity and resisting degradation from various types of radio effects to provide a superior communication platform
- Precision aimed optics enhancing photometric performance and complementing extended LED life
- Reduced bottom pan profile allowing for very shallow base can installation
- LEDs pulse width modulated (PWM) at 400 Hz optimizing LED performance and eliminating perceptible flicker to a moving human observer throughout the range of brightness steps
- Operates at all steps of constant current regulator technologies designed in compliance with IEC or FAA requirements
- Fully dimmable lights, conforming to the dimming curve of traditional halogen lights
- Low protrusion, high-intensity, Style 3 (≤ 6.35 mm) inset light fixtures
- No negative slope in front of the prisms

Sustainability

- Fully encapsulated all-in-one universal power supplies for Runway, Taxiway, Approach and Omni inset families
- Latest generation LEDs providing a long-lasting light source with high efficiency and low power consumption
- Reinforced top cover substantially exceeding standards to improve durability and longevity
- One single family of fixtures covering all runway, taxiway and approach applications
- IP68 rated enclosure designed for harsh environments; all fastenings are stainless steel
- Reinforced prism available as an option
- Compatible with existing infrastructure allowing for direct replacement of existing LED inset fixtures

Safety

- Improved mechanical design to strengthen and consolidate components, improving the customer maintenance experience
- Fail-open option for compatibility with legacy monitoring systems and optimization of advanced control/ monitoring systems
- Failed-LED Detection as required by Engineering Brief 67D
- Robust lightning protection complying with ANSI/IEEE C62.41-1991; Location Category C2 as required by FAA Eng. Brief 67. Category C2 is defined as a 1.2/50 μ S – 8/20 μ S combination wave, with a peak voltage of 10,000 V and a peak current of 5,000 A.

Power Supply

- Monitored - Integrated fail-open technology
- EQ with integrated ILCMS with OFDM technology for use with LINC 360 system

Ordering Code

RS

Application

RY = Rapid Exit Taxiway Indicator Light (RETIL)

Standards

3 = ICAO¹

Market Specific

0 = None
4 = German Military 7-step FO

Dimensions

1 = 8 inch (203 mm) diameter
2 = 12 inch (305 mm) diameter, 11.25 inch BC (285 mm)

Prism

S = Standard prism
R = Reinforced prism

Beam Orientation

1 = Unidirectional

Toe-in

N = None

Color – Side 1 (Left)

Y = Yellow

Color – Side 2 (Right)

N = None

Power and Monitoring

M = 2.8 A - 6.6 A Fail-Open monitoring
R = 2.8 A - 6.6 A, EQ Integrated LINC 360

Cable and connector²


1 = 1 x Style 6 2-pole plug, 2 individual wires
2 = 1 x Style 1 2-pole plug, jacketed SO 2-core cable³
5 = 1 x Flat 3-pole plug, 3 individual wires

Options

0 = None
1 = Arctic Kit

Version

1 = Version 1

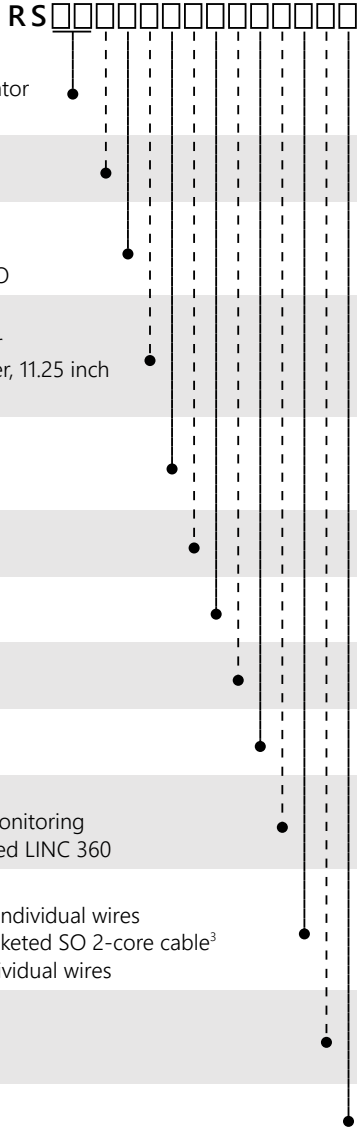

Ordering Code Notes

¹ Includes standards NATO, EASA, STAC, TP 312 and MOS 139

² EQ light fixtures are only available as a one-connector option.

³ All Style 1 corded fixtures will include a ground lug. All Style 6 or 3-pole corded fixtures will be provided with grounding screw(s).

⁴ Style 1 SO cord set not compatible with 8" shallow bases using side entry.

Maintenance and Installation

The light fixture can be installed on an 8-inch or 12-inch base. Gaskets are sold separately. Check what gasket and bolts to order depending on base and installation.

Refer to user manual UM-5055 for the 8-inch and 12-inch lights and to the interoperability information for installation on a specific base.

Operating Conditions

Operating temperature -60 °C to +55 °C / -76 °F to +131 °F

Storage temperature -60 °C to +80 °C / -76 °F to +176 °F

Humidity Up to 100%

Dimensions and Weight

Dimensions 203 mm (8 in) 305 mm (12 in)

Weight 3.0 kg / 6.6 lb (8 in) 6.8 kg / 15 lb (12 in)

ANNEX

8- and 12-inch light fixtures without Arctic Kit

Fixture type – 1 cord set ¹	Fixture load	Isolation transformer		CCR load
		Wattage	Load	
RETIL	25.5 VA	25 W	7.2 VA	32.7 VA

Notes

¹ Values provided are for the "M" option monitored power supply

Note:

- See manual UM-5055 for other power supplies.
- EQ fixtures:
 - The isolation transformer must have an additional 8 VA available above the fixture load for communication bandwidth. Size transformer to 65 W on fixture with arctic kit to assure additional 8 VA coverage. Transformers can be safely overloaded by 10 %.
 - Legacy BRITE II or AGLAS 2 systems — Order "M" power supply
- Fail-open fixtures:
 - The maximum rating for the isolation transformer is 200 W
- Additional voltage loss when longer secondary cables are used is not included in above table; these additional losses may result in a larger size isolation transformer requirement and must be factored into the circuit load calculation
- Additional voltage loss in primary cable is not included in above table; this additional loss will result in a higher CCR load and must be factored into the circuit load calculation
- Efficiency of the isolation transformer depends on the manufacturer of the transformer

For more information about the product, including manuals and certifications, please see the Product Center on the ADB SAFEGATE website: www.adbsafegate.com.