

# 537 Flexdek™

Flexdek™ industrial anti-slip grid matting.



# Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Standalone Matting 537 Flexdek™

Industrial grade welded duckboard design that creates an elevated platform for safety and offers basic fatigue relief. Open grid mat construction provides excellent drainage of fluids in all directions.

- PVC vinyl compound resists chemicals, oil and grease
- Easy to install and relocate
- Easy to clean and requires little to no maintenance
- Suitable for heavy duty use and will not flatten over time

#### Recommended use

- Wet Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

#### Colors:


- Black
- Black/Yellow

#### Sizes:

- 120cm x 1m
- 60cm x 1m
- 91cm x 1m
- 120cm x 10m
- 60cm x 10m
- 91cm x 10m

#### Accessories:


- 536K Akwadek™ Flexdek™ Connectors

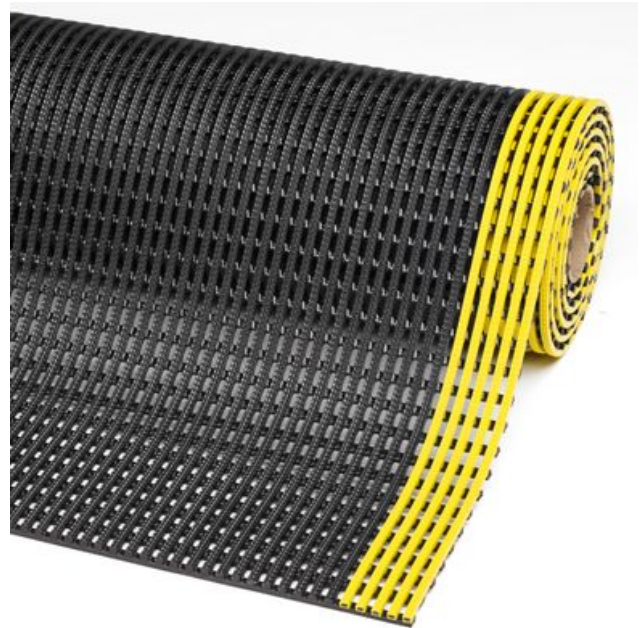

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE



# Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Standalone Matting Flexdek™

## General

Brand	Notrax
Category	Wet Areas Standalone Matting
Product Number	537
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Flexdek™
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands
Type	Wet/ Dry Areas - Rubber Working Platforms
Update trigger	20210310-1301
Usage Intensity	Heavy duty

## Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Sustainability	Recyclable material
Warranty	1

## Tests

Abrasion Resistance 1000	0.297 (5000 cycles)
Hardness	82 Shore A
Coefficient Friction Dry	1.42
Surface Flammability	Pass

## Technical Specifications

Application	Industrial Environments
Edges	No borders
Material	PVC
Material Group	PVC
Process	Extrusion

## Flexdek™ Black/Yellow

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
537C0036BY	91cm x linm	6.1	12
537C0024BY	60cm x linm	4.05	12
537R0048BY	120cm x 10m	81	12
537C0048BY	120cm x linm	8.1	12
537R0024BY	60cm x 10m	40.5	12
537R0036BY	91cm x 10m	61	12

## Flexdek™ Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
537C0036BL	91cm x linm	6.1	12
537C0024BL	60cm x linm	4.05	12
537R0036BL	91cm x 10m	61	12
537R0024BL	60cm x 10m	40.5	12
537C0048BL	120cm x linm	8.1	12
537R0048BL	120cm x 10m	81	12

## Accessories

536K Akwadek™  
Flexdek™ Connectors