


574 De-Flex® ESD Nitrile FR

ESD Nitrile mat with dual locking connection

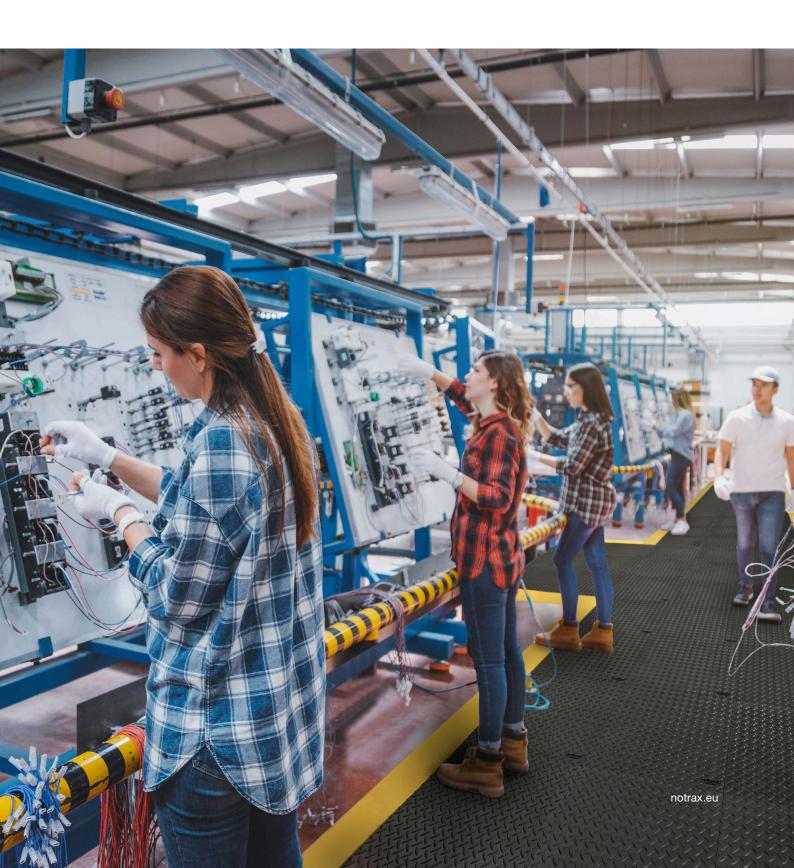

Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories 574 De-Flex® ESD Nitrile FR

Extremely comfortable heavy duty anti-fatigue matting system with popular diamond plate traction surface that can be easily assembled for coverage of large areas or individual workstation mats.

- Modular rubber tiles are designed with a universal double-locking system on all sides to ensure an extra strong yet seamless connection for fast installation
- The 19 mm thick platform insulates the worker from the hard ground while the bulleted domes underneath allow the mat to bend and flex with every movement
- Unique extended ramp prevents tripping and allows cart access with smart bevelling solutions for inside and outside corners
- Resistant to most industrial oils and suitable for welding areas



- Dry Areas
- For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:

Black


Sizes:

- 45cm x 45cm
- 45cm x 45cm

Accessories:

571 De-Flex® Safety Ramp Nitrile































Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories $De\text{-Flex}^{\$}$ ESD Nitrile FR

General

Brand	Notrax		
Category	ESD Matting & Accessories		
Product Number	574		
Product Family	Industrial & Commercial Matting		
Product Group	Ergonomic, Anti-fatigue & Safety Matting		
Product Name	De-Flex® ESD Nitrile FR		
Recommended use	For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.		
Series	De-Flex®		
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands		
Туре	Dry Areas - Heavy Duty Modular Rubber Mats		
Update trigger	20210310-1301		
Usage Intensity	Heavy duty		

Sustain ability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).	
Recycled	True	
Warranty	1	


Tests

Fire rating EU	EN 13501-1 Bfl-S1	
Slip Rating	R10	

Technical Specifications

Application	Industrial Environments	
Edges	Attachable bevelled edges are available	
Material Group	Nitrile rubber	
Process	Compression Moulding	

De-Flex™ ESD Nitrile FR Black





574B1818BL

574S1818BL

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
574B1818BL	45cm x 45cm	26.4	19
574S1818BL	45cm x 45cm	3.3	19

Accessories

571 De-Flex® Safety Ramp Nitrile