



Justrite Safety Group

445 Skywalker HD o-Curve™ Nitrile FR

Skywalker HD o-Curve™ Nitrile FR 22.5-degree mat



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 445 Skywalker HD o-Curve™ Nitrile FR

The Skywalker HD™ accessories maintain the same feel as the Skywalker HD™ mats with an ergonomic bubble pattern and matching rubber compounds. This seamless integration allows for unlimited configuration possibilities.

- Slip resistance rating R9 according to DIN 51130
- Resistant to most industrial oils and suitable for welding areas
- 100% nitrile rubber compound

Recommended use

- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:


- Black

Sizes:

- 91cm x 22.5 deg

Accessories:

- INS INSTALLATION
- 441 SkywalkerHD o-Curve™ Safety Ramp Nitrile
- 469 Skywalker HD Marking Line™
- 481 Skymaster® Hd O-Curve™ Ramp

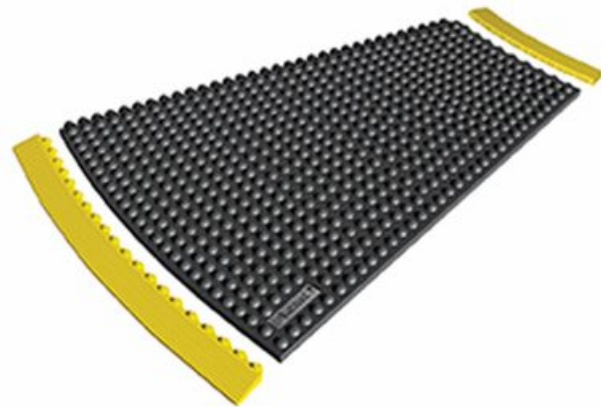

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Skywalker HD o-Curve™ Nitrile FR

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	445
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Skywalker HD o-Curve™ Nitrile FR
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Skywalker HD™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Accessories - Skywalker HD™
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	0.739
Elongation	240%
Fire rating EU	EN 13501-1 Bfl-S1
Fire rating US	Pass
Hardness	68 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	19.53 N/mm

Technical Specifications

Application	Industrial Environments
Breaking Load	5.50 Mpa
Edges	Attachable bevelled edges are available
Material	100% nitrile fire retardant rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding

Skywalker HD o-Curve™ Nitrile FR Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
445SC045BL	91cm x 22.5 deg	6.4	13

Accessories

INS INSTALLATION

441 SkywalkerHD o-Curve™ Safety Ramp Nitrile

469 Skywalker HD Marking Line™

481 Skymaster® Hd O-Curve™ Ramp