



Justrite Safety Group

463 Skywalker HD™ ESD

ESD rubber tiles with a bubble pattern



Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

463 Skywalker HD™ ESD

Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations. Ergonomic benefit derived from a 13 mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

- The unique design and craftsmanship make the mat easy to handle and easy to install on site
- A tooled grid of 30 cm x 30 cm sections on the underside of the mat makes further customization quick and easy
- Attachable bevelled edges prevent tripping and allow inside and outside corners

Recommended use

- Dry Areas
- For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:


- Black

Sizes:

- 91cm x 91cm
- per m²

Accessories:

- 825-C
- 441 SkywalkerHD o-Curve™ Safety Ramp Nitrile
- 469 Skywalker HD Marking Line™
- 461 Skywalker HD™ Safety Ramp Nitrile
- 444 Skywalker HD o-Curve™ ESD Nitrile FR
- 434 Skywalker HD i-Curve™ ESD Nitrile FR
- 051 ESD Floor Grounding Cord

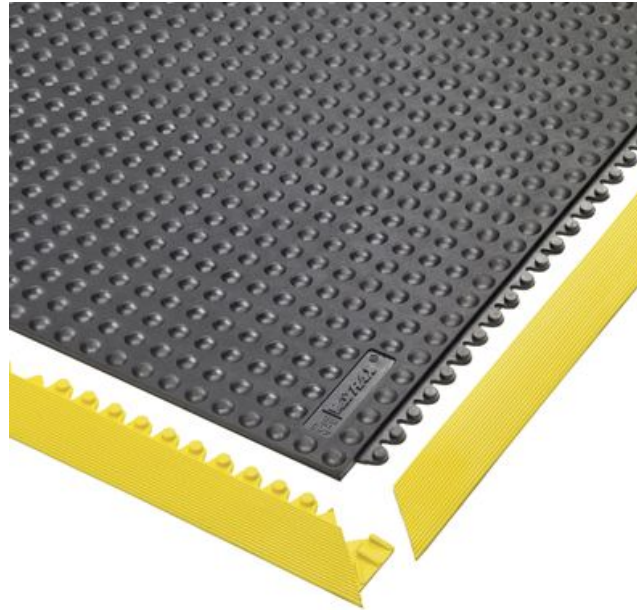

Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

Skywalker HD™ ESD

General

Brand	Notrax
Category	ESD Matting & Accessories
Product Number	463
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Skywalker HD™ ESD
Recommended use	For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Skywalker HD™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Modular Systems
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	0.824
Elongation	210%
ESD Rg	Rg $10^6 - 10^9 \Omega$
ESD Rp	Rp $10^6 - 10^9 \Omega$
Fire rating US	Pass
Hardness	67 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	10.5 N/mm

Technical Specifications

Application	Industrial Environments
Breaking Load	4.80 Mpa
Edges	Attachable bevelled edges are available
Material	Static dissipative natural rubber
Material Group	Rubber
Process	Compression Moulding

Skywalker HD™ ESD Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
463S0000BL	per m2	12.3	13
463S0033BL	91cm x 91cm	10	13

Accessories

825-C	441 SkywalkerHD o- Curve™ Safety Ramp Nitrile	469 Skywalker HD Marking Line™	461 Skywalker HD™ Safety Ramp Nitrile
444 Skywalker HD o- Curve™ ESD Nitrile FR	434 Skywalker HD i- Curve™ ESD Nitrile FR	051 ESD Floor Grounding Cord	