



Justrite Safety Group

573 De-Flex[®] ESD

ESD modular mat with dual locking connection



Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

573 De-Flex® ESD

Extremely comfortable heavy duty anti-fatigue matting system with popular diamond plate traction surface that can be easily assembled for coverage of large areas or individual workstation mats.

- Modular rubber tiles are designed with a universal double-locking system on all sides to ensure an extra strong yet seamless connection for fast installation
- The 19 mm thick platform insulates the worker from the hard ground while the bulleted domes underneath allow the mat to bend and flex with every movement
- Unique extended ramp prevents tripping and allows cart access with smart bevelling solutions for inside and outside corners

Recommended use

- Dry Areas
- For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:


- Black

Sizes:

- 45cm x 45cm
- 45cm x 45cm

Accessories:

- 825-C
- 051 ESD Floor Grounding Cord
- 571 De-Flex® Safety Ramp Nitrile

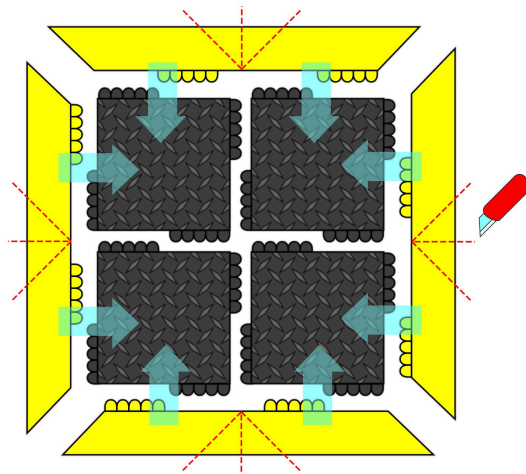

Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

De-Flex® ESD

General

Brand	Notrax
Category	ESD Matting & Accessories
Product Number	573
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	De-Flex® ESD
Recommended use	For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	De-Flex®
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Warranty	1

Tests

Fire rating US	Pass
Slip Rating	R10

Technical Specifications

Application	Industrial Environments
Edges	Attachable bevelled edges are available
Material	Static dissipative natural rubber
Material Group	Rubber
Process	Compression Moulding

De-Flex™ ESD Black



573S1818BL



573B1818BL

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
573S1818BL	45cm x 45cm	3.3	19
573B1818BL	45cm x 45cm	26.4	19

Accessories

825-C

051 ESD Floor Grounding Cord
571 De-Flex® Safety Ramp Nitrile