



Justrite Safety Group

# 646 Diamond Flex™ Nitrile FR

Diamond plate workstation welding mat



# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Standalone Matting 646 Diamond Flex™ Nitrile FR

Heavy duty oil-resistant and fire retardant diamond plate workstation welding mat. Tough 100% nitrile rubber compound is extremely durable and even withstands welding sparks. Standard size mats are loose lay and require no installation.

- 100% nitrile rubber compound resistant to industrial oils
- Fire classification Bfl-S1 to resist welding sparks
- Extremely comfortable 19 mm thick workstation mat
- Diamond plate traction surface for freedom of movement
- Standard size mats for individual workstations
- Safety ramps included on all sides for added safety to prevent tripping

## Recommended use


- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

## Colors:

- Black
- Black/Yellow

## Sizes:

- 102 cm x 163 cm
- 97cm x 163cm

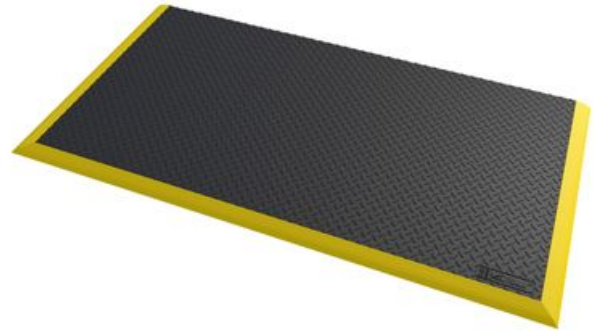

# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Standalone Matting Diamond Flex™ Nitrile FR

## General

Brand	Notrax
Category	Dry Areas Standalone Matting
Product Number	646
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Diamond Flex™ Nitrile FR
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Diamond Flex™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands
Type	Dry Areas - Standalone Rubber Mats
Usage Intensity	Heavy duty

## Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Sustainability	Recyclable material
Warranty (years)	1

## Tests


Fire rating EU	EN 13501-1 Bfl-S1
Slip Rating	R10
Surface Flammability	Pass

## Technical Specifications

Application	Industrial Environments
Chemical Resistance	Cat. II Nitrile Rubber
Edges	Bevelled rubber borders on all four sides
Material	100% nitrile fire retardant rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding
Temperature Range	- 40 ° C up to + 120 ° C

# 646 Diamond Flex™ Nitrile FR - Black/yellow

646S4064BY



646S3864BY

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
646S3864BY	97cm x 163cm	20.3	18.7
646S4064BY	102 cm x 163 cm	21.3	18.7

# 646 Diamond Flex™ Nitrile FR - Black

646S4064BL



646S3864BL

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
646S3864BL	97cm x 163cm	20.3	18.7
646S4064BL	102 cm x 163 cm	21.3	18.7