

570 De-Flex[®]

Modular mat with dual locking connection system



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 570 De-Flex®

Extremely comfortable heavy duty anti-fatigue matting system with popular diamond plate traction surface that can be easily assembled for coverage of large areas or individual workstation mats.

- Modular rubber tiles with a universal double-locking system on all sides to ensure an extra-strong seamless connection
- 19 mm thick platform insulates the worker from the hard ground
- Bulleted domes underneath allow the mat to bend and flex with every movement
- Unique extended ramp prevents tripping and allows cart access
- Smart bevelling solutions for inside and outside corners

Recommended use

- Dry Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:


- Black

Sizes:

- 45cm x 45cm
- 45cm x 45cm

Accessories:

- INS INSTALLATION
- 571 De-Flex® Safety Ramp Nitrile

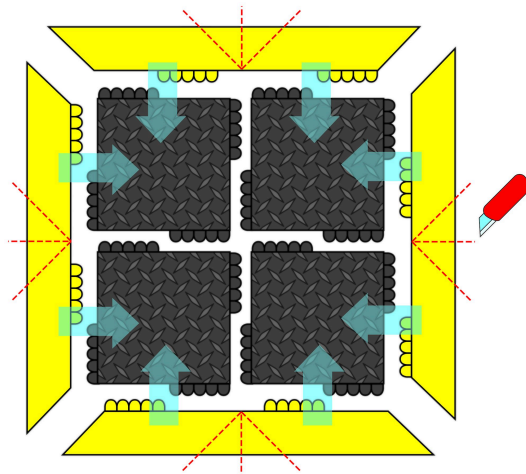

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting De-Flex®

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	570
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	De-Flex®
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	De-Flex®
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Heavy Duty Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Warranty	1

Tests

Fire rating US	Pass
Slip Rating	R10

Technical Specifications

Application	Industrial Environments
Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding
Temperature Range	- 40 ° C up to + 120 ° C

De-Flex™ Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
570S1818BL	45cm x 45cm	3.3	19
570B1818BL	45cm x 45cm	26.4	19

Accessories

INS INSTALLATION 571 De-Flex® Safety
Ramp Nitrile