



Justrite Safety Group

440 Skywalker HD o-Curve™

Skywalker HD o-Curve™ 22.5-degree bubble mat



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 440 Skywalker HD o-Curve™

The Skywalker HD™ accessories maintain the same feel as the Skywalker HD™ mats with an ergonomic bubble pattern and matching rubber compounds. This seamless integration allows for unlimited configuration possibilities.

- Slip resistance rating R9 according to DIN 51130
- 100% natural rubber compound

Recommended use

- Wet/Dry and Oily Areas
- Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, wait stations, service counters, cashiers
- Medium duty

Colors:


- Black

Sizes:

- 91cm x 22.5 deg

Accessories:

- 441 SkywalkerHD o-Curve™ Safety Ramp Nitrile
- 460 Skywalker HD™
- 469 Skywalker HD Marking Line™
- 430 Skywalker HD i-Curve™

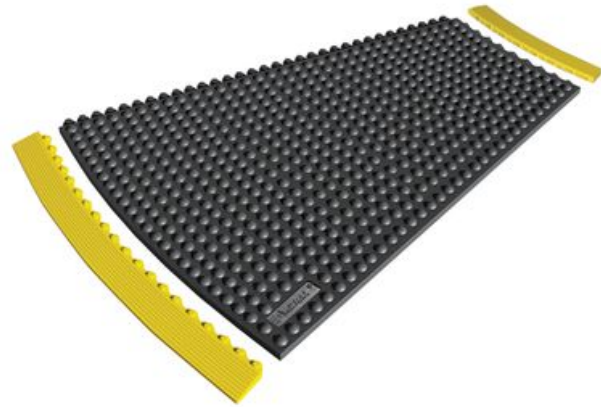

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Skywalker HD o-Curve™

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	440
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Skywalker HD o-Curve™
Recommended use	Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, wait stations, service counters, cashiers
Series	Skywalker HD™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Moselle, MS 39459, United States
Type	Accessories - Skywalker HD™
Update trigger	20210310-1301
Usage Intensity	Medium duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	0.824
Elongation	210%
Fire rating US	Pass
Hardness	67 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	10.5 N/mm

Technical Specifications

Breaking Load	4.80 Mpa
Edges	Bevelled edges on all sides
Material	Nitrile rubber blend
Material Group	Nitrile Rubber Blend
Process	Foaming

SkywalkerHD o-Curve™ Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
440SC045BL	91cm x 22.5 deg	6.4	13

Accessories

441 SkywalkerHD o-Curve™ Safety Ramp Nitrile

460 Skywalker HD™

469 Skywalker HD Marking Line™

430 Skywalker HD i-Curve™