


Product Datasheet

Emergency Eye/Face Wash - Plumbed in STD-85G/P(D)

Open stainless-steel bowl, pedestal-mounted emergency eye/face wash featuring twin spray nozzles protected by dust covers which lift off upon activation via the push plate. The flow regulator valve guarantees an optimum water flow.

The eye wash diffusers are fitted with fine mesh strainers and individual flow controllers designed to give a gentle flow of aerated water at 12 litres per minute as per the ANSI standard.

This unit is intended for indoor use but can be located outdoors where there is no risk of overheating or freezing.

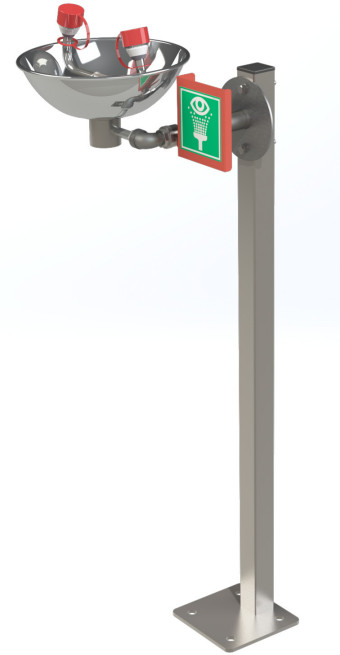

Specifications

MATERIALS OF CONSTRUCTION	
BOWL/LID	Stainless steel
DIFFUSERS	Chrome plated brass retaining ring, stainless steel filter mesh, plastic body
PIPEWORK	Stainless steel
STANDARD FINISH	Polished brush finish
SERVICES	
WATER INLET	1/2" Male BSP
OPERATING PRESSURE	2.0 to 6 BAR G / 29 to 87 PSI
MINIMUM FLOW RATES	12 L / 3 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
EYE/FACE WASH	Push plate
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	314mm (12.4in) x 535mm (21.1in) x 1154mm (45.4in)
WEIGHT	4kg / 9lb

General Arrangement Drawing

Emergency Eye/Face Wash - Plumbed in STD-85G/P(D)

