


550 Cushion Ease™

Modular rubber anti-fatigue mat

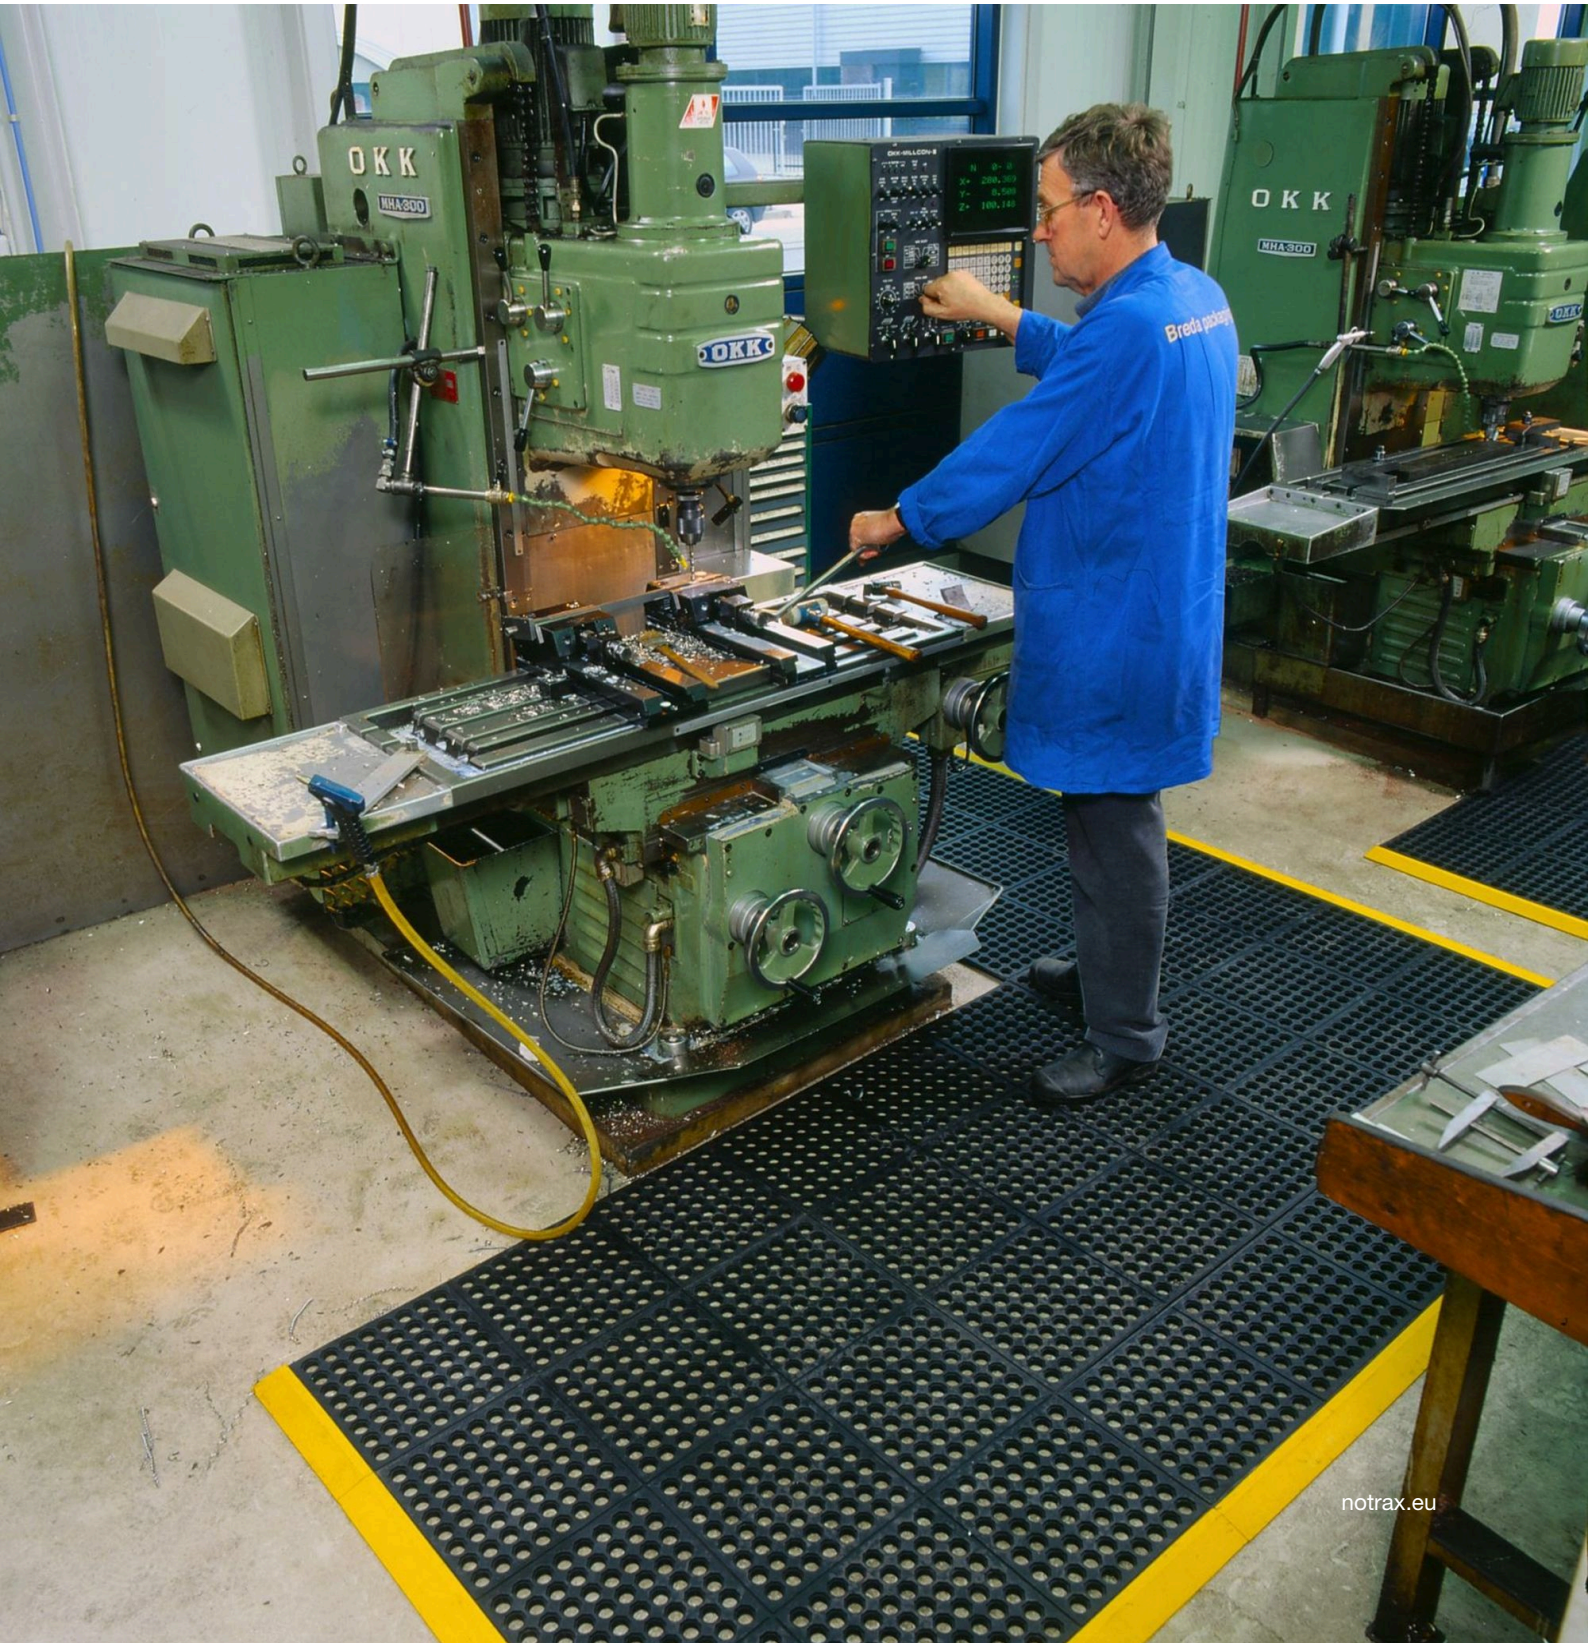

Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting 550 Cushion Ease™

Modular rubber anti-fatigue mats with holes for excellent drainage and aeration leaving a dry, clean work area. Superb anti-fatigue properties due to its unique design underneath and high quality resilient rubber compounds.

- Square snap-together units of 91 cm x 91 cm that can be assembled effortlessly and laid out from wall-to-wall or as islands in any direction or shape
- Compatible with patented MD Ramp System™ for smart safety bevelling solutions
- Designed to yield a long service life
- 100% natural rubber compound

Recommended use

- Wet Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:

- Black

Sizes:

- 91cm x 91cm
- per m²

Accessories:

- 552 MD-X Ramp System™ Nitrile
- INS INSTALLATION
- 651 M.D. Fire Retardent Ramp System
- 551 MD Ramp System™ Nitrile



WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE



Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting Cushion Ease™

General

| | |
|-------------------|--|
| Brand | Notrax |
| Category | Wet Areas Modular Matting |
| Product Number | 550 |
| Product Family | Industrial & Commercial Matting |
| Product Group | Ergonomic, Anti-fatigue & Safety Matting |
| Product Name | Cushion Ease™ |
| Recommended use | For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms |
| Series | Cushion-Ease® |
| Shipping Location | Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States |
| Type | Wet/ Dry Areas - Modular Rubber Mats |
| Update trigger | 20210310-1301 |
| Usage Intensity | Heavy duty |

Sustainability

| | |
|----------------|---|
| REACH | Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals). |
| Recycled | True |
| Rohs US | Rohs compliant (Restriction of Hazardous Substances). |
| Sustainability | Recyclable material |
| Warranty | 1 |

Tests

| | |
|----------------------------|--------------------------------|
| Abrasion Resistance 1000 | 2.6% weight loss (5000 cycles) |
| Compression Deflection 1.4 | 0.37 cm |
| Compression Deflection 2.8 | 0.53 cm |
| Fire rating US | Pass |
| Hardness | 68 Shore A |
| Coefficient Friction Dry | 0.71 |
| Surface Flammability | Pass |
| Tear Strength | 32.1lb |

Technical Specifications

| | |
|-------------------|---|
| Application | Industrial Environments |
| Breaking Load | 33.2lb |
| Edges | Attachable bevelled edges are available |
| Material | Natural rubber |
| Material Group | Natural rubber |
| Process | Compression Moulding |
| Temperature Range | - 40 ° C up to + 120 ° C |

Cushion Ease™ Black

| Art. nr. | Dimension (cm) | Weight (kg) | Thickness (mm) |
|------------|----------------|-------------|----------------|
| 550S0033BL | 91cm x 91cm | 10.8 | 19 |
| 550S0000BL | per m2 | 11.6 | 19 |

Accessories

552 MD-X Ramp
System™ Nitrile

INS INSTALLATION

651 M.D. Fire Retardent
Ramp System

551 MD Ramp System™
Nitrile