


649 Safety Stance Solid™

High quality anti-fatigue matting

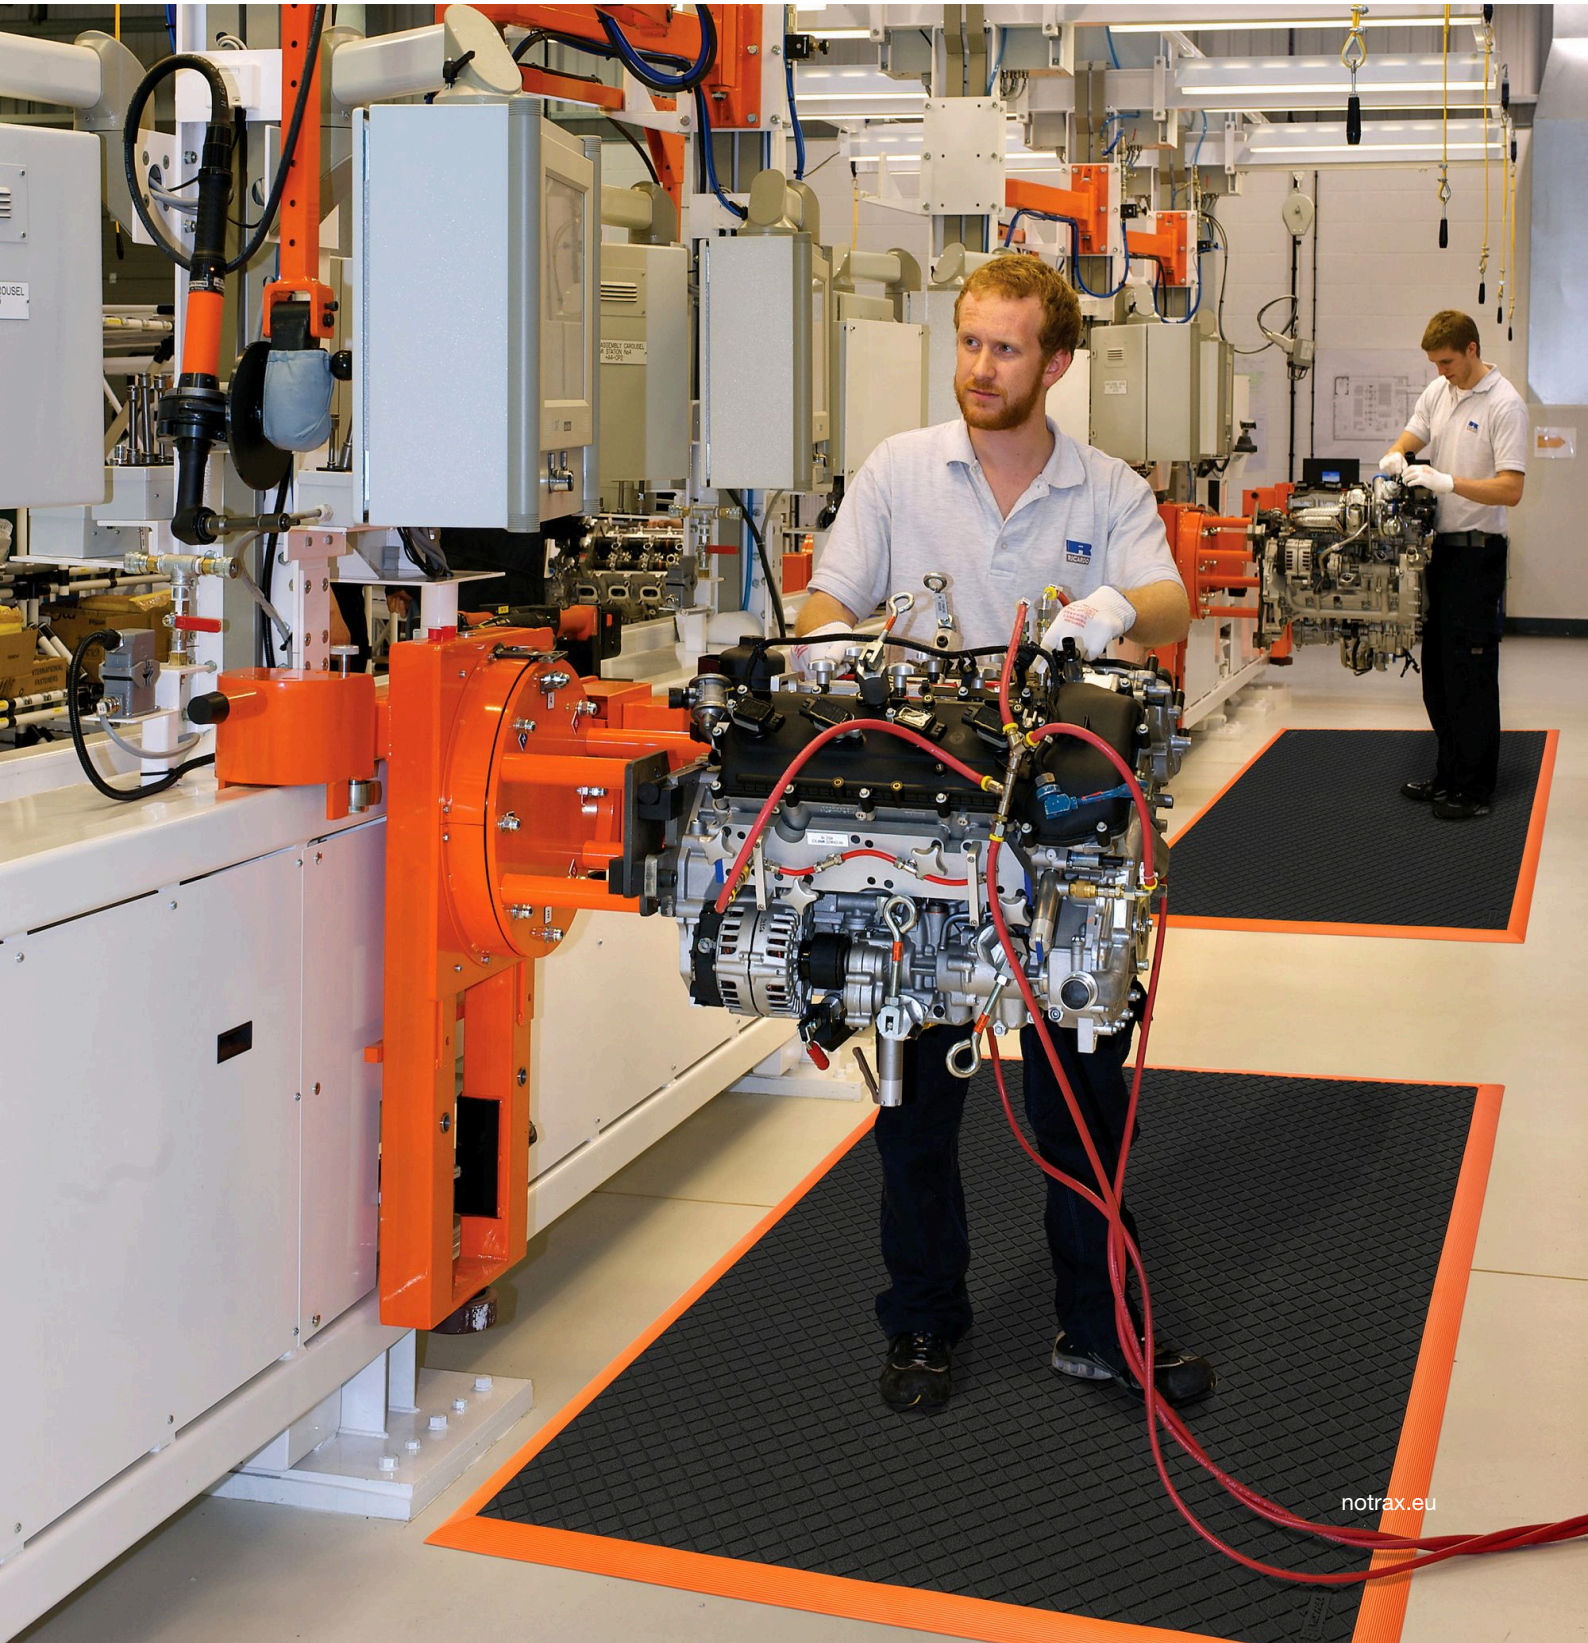

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting 649 Safety Stance Solid™


High quality anti-fatigue matting for heavy duty industrial environments. Unique DiamondGrid™ surface pattern ensures sure footing to prevent slips and falls while channels drain incidental oil exposure.

- Closed design ensures easy cleaning and prevents small items from falling under the mat
- Ergonomic benefit derived from 20 mm thick resilient worker platform
- Highly visible nitrile rubber orange coloured borders included on 3 sides for added safety
- Made of 100% nitrile rubber compound designed to withstand industrial oils and harsh chemicals



Recommended use

- Dry Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty



Colors:


- Black
- Black/Orange

Sizes:

- 66cm x 102cm
- 90cm x 150cm
- 97cm x 163cm
- 97cm x 315cm
- per m2

Accessories:

- 549K Safety Stance™ Connectors
- 549N Safety Stance™ Ramps Nitrile 5 mm
- INS Installation Service Available on Request

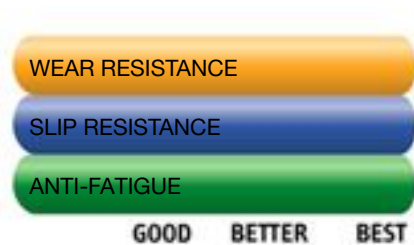

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting Safety Stance Solid™

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	649
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Safety Stance Solid™
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	Safety Stance™
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands
Type	Dry Areas - Heavy Duty Nitrile Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Warranty (years)	1

Tests

Abrasion Resistance 1000	3.1%
Elongation	258.2%
Foam Battery	40 lb/in ²
Hardness	33 Shore A
Slip Rating	R10
Coefficient Friction Dry	0.65
Surface Flammability	Pass


Technical Specifications

Application	Industrial Environments
Edges	Orange coloured borders included on 3 sides
Material	100% Nitrile rubber
Material Group	Nitrile rubber
Process	Compression Moulding

Safety Stance Solid™ Orange/Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
649S0000BL	per m2	15	20
649S2640OB	66cm x 102cm	10.4	20
649S3864OB	97cm x 163cm	24.7	20
649S3124OB	97cm x 315cm	43.74	20

Safety Stance Solid™ Black - No Bevels



649S0035BL

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
649S0035BL	90cm x 150cm	20.25	20

Accessories

549K Safety Stance™
Connectors

549N Safety Stance™
Ramps Nitrile 5 mm

INS Installation Service
Available on Request

Technical Drawings
Safety Stance Solid™