

572G De-Flex™ Nitrile 5S

Modular mat with dual locking connection



Ergonomic, Anti-fatigue & Safety Matting - 5S Workplace Organization

572G De-Flex™ Nitrile 5S

Heavy-duty rubber tiles are easily assembled. Ergonomic benefit derived from a 13 mm thick worker platform with a bubble pattern for maximum fatigue relief. The 5S grey colour can be used to mark out work areas for effective workplace organization.

- Modular rubber tiles are designed with a universal double-locking system on all sides to ensure an extra strong yet seamless connection for fast installation
- The 19 mm thick platform insulates the worker from the hard ground while the bulleted domes underneath allow the mat to bend and flex with every movement
- Unique extended ramp prevents tripping and allows cart access with smart bevelling solutions for inside and outside corners
- Resistant to most industrial oils
- 5S grey colour to mark out work areas

Recommended use

- Dry Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:


- 5S Grey

Sizes:

- 45cm x 45cm
- 45cm x 45cm

Accessories:

- 571 De-Flex™ Safety Ramp Nitrile

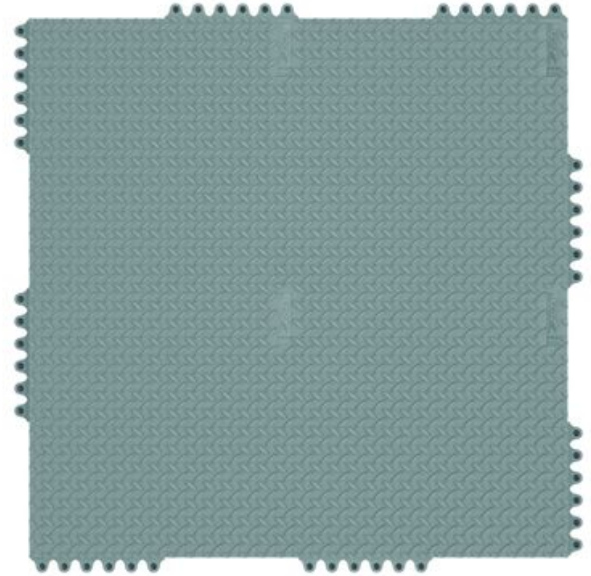

Ergonomic, Anti-fatigue & Safety Matting - 5S Workplace Organization

De-Flex™ Nitrile 5S

General

Brand	Notrax
Category	5S Workplace Organization
Product Number	572G
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	De-Flex™ Nitrile 5S
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	De-Flex®
Shipping Location	Barendrecht 2992SB, The Netherlands
Type	Dry Areas - Heavy Duty Industrial
Usage Intensity	Heavy duty

Tests

Slip Rating	R10
-------------	-----

Technical Specifications

Application	Dry industrial environments
Edges	Attachable bevelled edges are available
Material	100% Nitrile rubber
Material Group	Nitrile rubber
Process	Compression Moulding
Temperature Range	- 40 ° C up to + 120 ° C

De-Flex™ Nitrile 5S - Grey

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
572B1818GY	45cm x 45cm	26.4	19
572S1818GY	45cm x 45cm	3.3	19

Accessories

571 De-Flex™ Safety
Ramp Nitrile