


FLOOR GRINDERS

CONTEC[®]
TYROLIT GROUP

ALPHA SERIES

www.contecgmbh.com

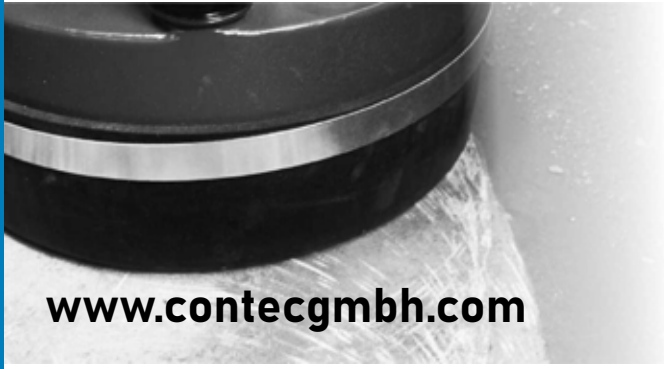

info@contecgmbh.com

+49 (0) 2741 9344 0

www.contecgmbh.com

FLOOR GRINDERS



ALPHA SERIES

www.contecgmbh.com

Our smallest professional Grinder - with incredible performance!

Robust and reliable, safe and user friendly operation, easy transport - ideally suited for screed, parquet and tile layers, painters, renovators, rentals and construction companies!

Powered by either 110 or 230 volt single phase, our grinder reaches the class of 3 phase machines while weighing in at only 43 kg! Speed is what makes it cut quickly and aggressively, all 1,500 rpm of it!

Not only is the ALPHA® an incredible edge grinding machine, it is extremely versatile due to its size and maneuverability. It is ideal for balconies, and garage renovation and for substrate preparation when tiling or gluing parquet, carpets or coverings!

Protect yourself and your employees. Clean environmentally friendly and with low dust levels when combined with CONTEC dust extraction systems.

Special Features:

- Removable dust shroud allows you to grind flush to the wall.
- Wide range of tooling available for cutting and coating removal.
- Utilizes the "Easy-Change" diamond segment retention system for fast and efficient changes.
- Handle folds within seconds, for easy transport.
- Flexible drive coupling.



ALPHA

TECHNICAL DATA ... ALPHA

	ALPHA	ALPHA-S
	230 mm	
L x B x H	60 x 30 x 51 cm (folded)	
	2 kW	2.2 kW
	230 V, 50 Hz, 16 A	230 V, 50 Hz, 16 A
	43 kg	64 kg
	Tool rotation 0 -1500 rpm	
	Ø 50 mm	

RECOMMENDED DUST COLLECTOR - CDM 1500 (ALTERNATIVE WITH HEPA OR LONGOPAC)

FLOOR GRINDERS



ALPHA SERIES

www.contecgbh.com



ALPHA - S
with speed control



External control panel
for ALPHA-S



ALPHA
foldable handle



CA 2

Grinding of soft screeds & concretes in the course of substrate preparation.

Segment with hard bond, grain size 40-70, highly concentrated. Removal of small irregularities or joint transitions. Preparation of the surface for the application of coatings.



VS 2

Grinding of hard screeds & concretes in the course of substrate preparation.

Segment with medium bond, grain size 40-70, highly concentrated. Removal of small irregularities or transitions. Preparation of the surface for the application of coatings.



F1

Removal of hard adhesives, synthetic resin coatings or levelling compounds.

Coarse grinding pattern, long service life. All-round tool for decoating. Aggressive when removing old, hardened adhesives, levelling compounds, etc.



PKD PR

Removal of elastic materials, adhesives, coatings and levelling compounds.

'Peeling tool' for stripping - highly aggressive for removing elastic adhesives etc. Ideal for decoring and renovation, long service life. Very aggressive, extremely coarse sanding pattern.



PKD-VR

Removal of elastic adhesives, synthetic resin coatings or levelling compounds.

Special tool for decoating - aggressive when removing coating systems (e.g. OS in car parks), cured or hard adhesives, etc. Long service life. Coarse grinding pattern but finer grinding pattern than PCD discs.



EASY CHANGE SYSTEM

DUST RING



PLASTIC (attached)



PLASTIC
(removable)



STEEL with brush rim

FLOOR GRINDERS



www.contecgmbh.com

ALPHA SERIES

info@contecgmbh.com



+49 (0) 2741 9344 0

www.contecgmbh.com