


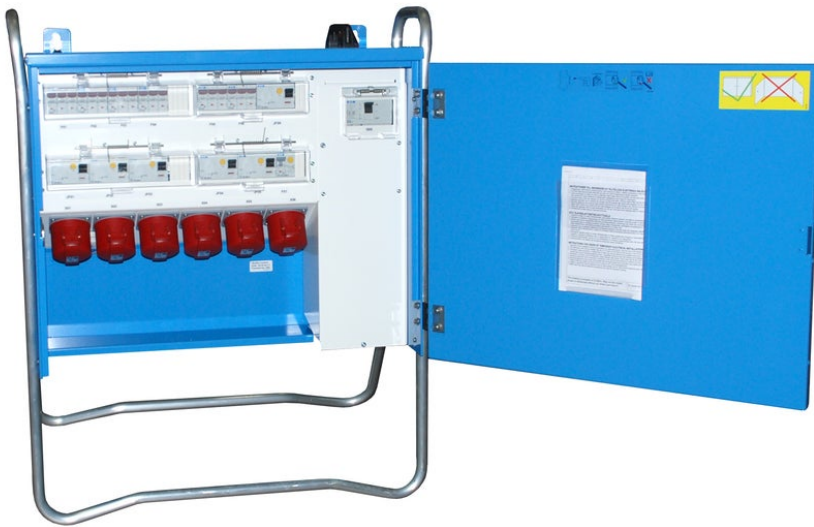

SF 125CM//106-7 EN SEFI BEC - Final distribution panel 125A

Art.nr.: **EB11641**

Aluminium distribution centres for indoor and outdoor use on construction sites, at events, exhibitions, etc., with folding aluminium stand (3 mm). Doors and hinges are inset and ruggedly constructed.

Distribution centres are lockable and are fitted with eyes for mounting on a wall as standard. All components are accessible from the front. A unique new enclosure design makes the distribution centre easy to maintain and service, since the unit can be lifted out of the enclosure with the top assembly. There is no need to disconnect the chassis earth cable.

This design is protected by patent.

One new feature is that certain models designed for a fixed supply also have a fixed output with breaker. This distribution centre is one of the lightest on the market.

El-Björn AB

Box 29, SE-334 21 Anderstorp

Tel: (+46) 0371-588 100

E-mail: info@elbjorn.se

Technical data

Rated current	125A
Voltage	400V
Incoming Connectable area Al/Cu	16 - 95 mm ²
Incoming MCCB 100-125A, 3P, 25kA	1
Outgoing 2-pol/230V Schuko Type F	1
Outgoing 5-pol/400V 32A CEE 432-6	6
Personal protective equipment RCBO C 16A 30mA 2P	1
RCD 0,03A	6
Short-circuit strength I_{cc}	25 kA
IP rating	IP44
Dimensions H x W x L	910 x 750 x 310 mm
Net weight (kg)	28
Warranty Length (months)	60
Dimensions (mm)	910mm x 760mm x 280mm

El-Björn AB

Box 29, SE-334 21 Anderstorp

Tel: (+46) 0371-588 100

E-mail: info@elbjorn.se