

2750 RJ



www.ommelift.com

Crawler lift - Telescopic

Dealer:

ÅDALEN

A.Ådalen AB


Sverige
+46 73 303 99 39
post@aadalen.se
www.aadalen.se

OMMELIFT



Built to last - ask our users!

2750 RJ Crawler lift

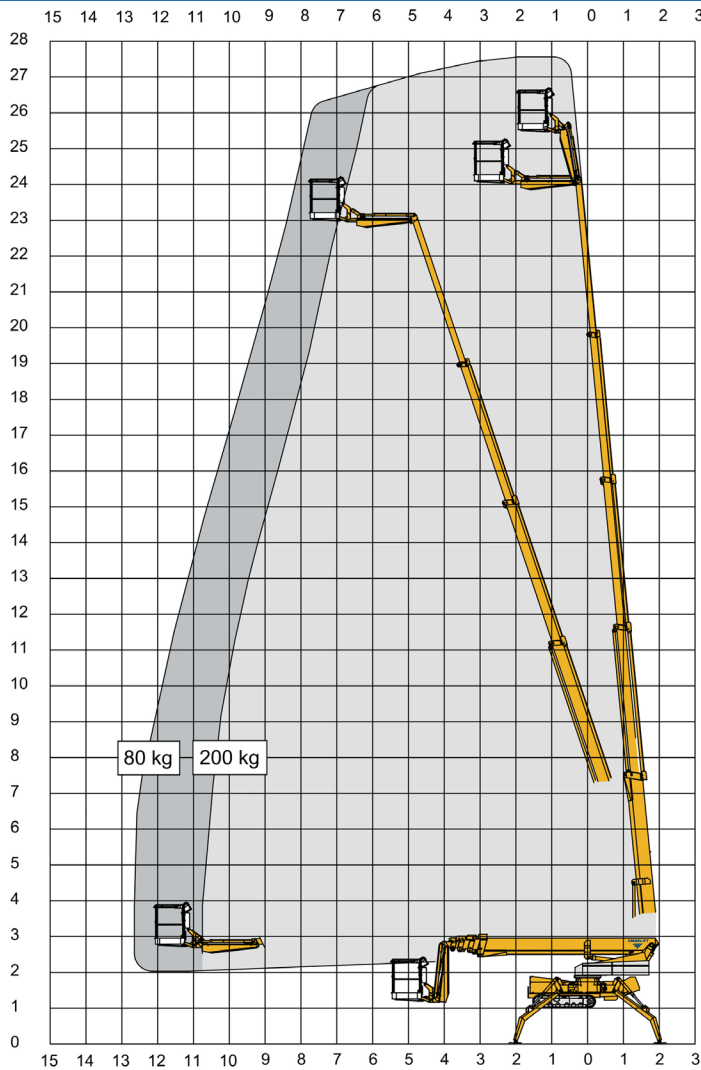

Technical Data:		2750 RBJ	2750 RBDJ
Max. working height		27.2 m	
Max. platform height		25.2 m	
Max. outreach		12.6 m	
Up and over clearance		-	
Angle boom length (boom + basket)		-	
Jib length (jib + basket)		2.7 m	
Vertical jib rotation		90°	
Turret rotation		± 355°	
Basket rotation		± 41°	
Max. basket load		200 kg	
Basket size (detachable)		1.25 x 0.8 x 1.1 m	
Stabilizer pad size		0.28 x 0.44 m	
	¹ Diesel	BATTERY	² HYBRID
Engine			14kW/18.8hp
Fuel tank capacity			23 l
Generator			24 V / 22 A
Battery pack		24V/400Ah/5h	24V/200Ah/5h
Charger		24 V / 30 A	24 V / 30 A
Double charger system		Standard	Optional
Elec. descent from basket			
See www.ommelift.com for more features and options			
Gradeability, max. across slope		25% (14.0°)	
Gradeability, max. up and down slope		35% (19.3°)	
Set-up ability on uneven ground		40% (21.8°)	
Crawler track length		1.76 m	
¹ Undercarriage in Wide ² Undercarriage in Narrow ³ Wide set-up ⁴ Wide/Narrow set-up			
Total weight		3725 kg	3725 kg
¹ Live load in transit position		397 kg/m ²	397 kg/m ²
² Live load in transit position		397 kg/m ²	397 kg/m ²
³ Live load in working position		186 kg/m ²	186 kg/m ²
⁴ Live load in working position		230 kg/m ²	230 kg/m ²
Ground pressure, tracks (Hard surface)		0.53 kg/cm ² (1.90 kg/cm ²)	0.53 kg/cm ² (1.90 kg/cm ²)
Ground pressure, outrigger pad		1.93 kg/cm ²	1.93 kg/cm ²
Max. force, outrigger		23.8 kN	23.8 kN

