

## HDS 12/18-4 S

Super class hot water high-pressure cleaner with water-cooled, slow-running, 4-pole electric motor, robust 3-piston axial pump and 2 detergent tanks.



Order no.

1.071-959.0

- Robust, 3-piston axial pump
- Save time and energy: EASY!Force high-pressure gun and EASY!Lock quick-release fasteners
- 2 cleaning agent tanks with rinse function

### Technical data


EAN code		4066529078414
Supply voltage	Ph / V / Hz	3 / 400 / 50
Flow rate	l/h	500 - 1200
Working pressure	bar / MPa	30 - 180 / 3 - 18
Temperature (for supply 12 °C)	°C	min. 80 - max. 155
Consumption of heating oil or gas at full load	kg/h	7.7
Connected load	kW	8
Power cable	m	5
Fuel tank	l	25
Weight (with accessories)	kg	190
Weight incl. packaging	kg	199.9
Dimensions (L × W × H)	mm	1330 × 750 × 1060

### Equipment

Spray gun		EASY!Force Advanced
High-pressure hose	m	10 / Longlife / DN 8, 400 bar
Spray lance	mm	1050
Power nozzle		■
Pressure switch-off		■
Option for the 2 spray lance operation		■
Pole reverse plug (3~)		■
Soft Damping System (SDS)		■
2 cleaning agent tanks		■
Dry-running protection		■

■ included in the scope of supply.

Users must receive training on this device.

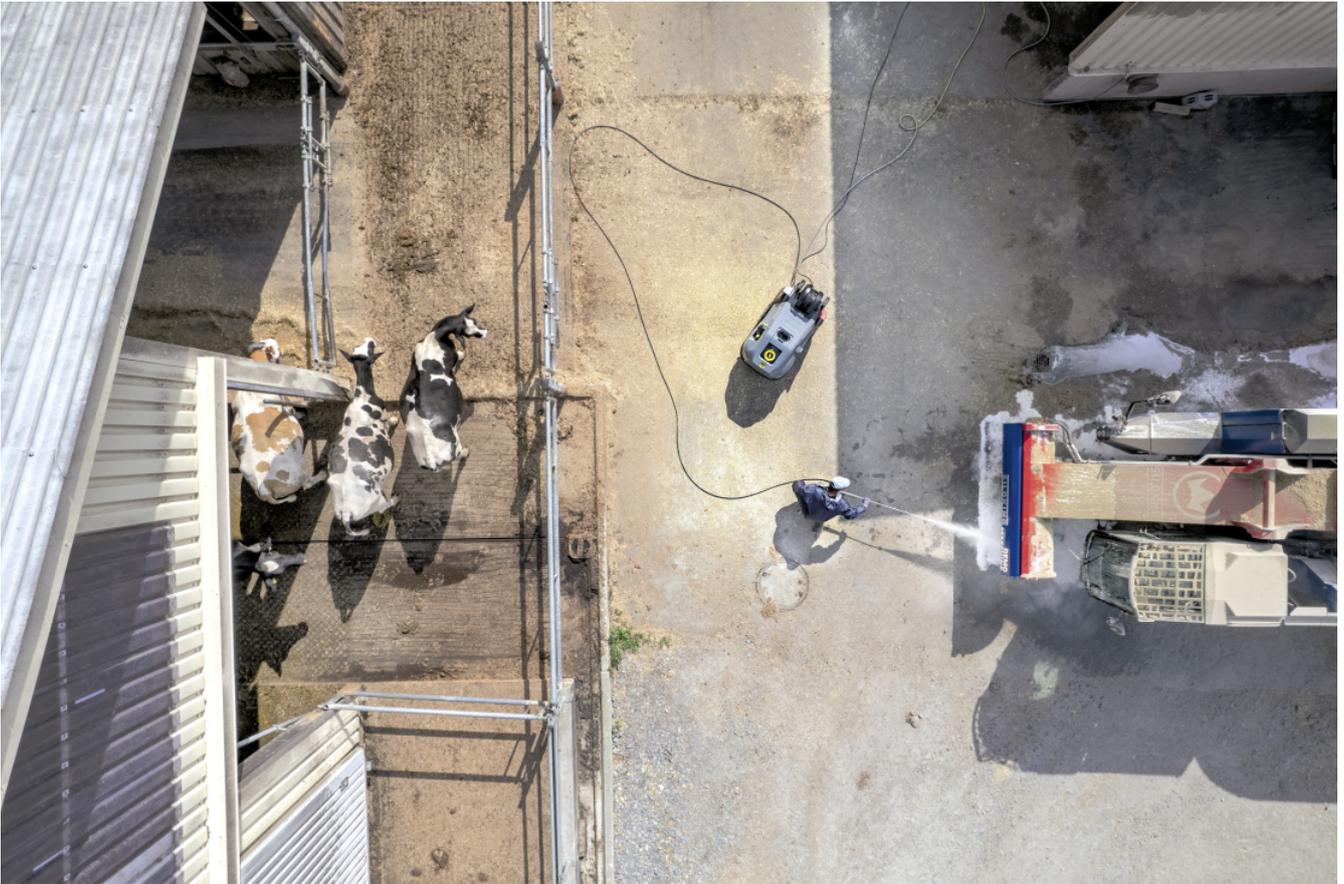

## High efficiency

- In ecoefficiency mode, the machine operates in the most economical temperature range (60 °C) – with full water flow.
- The burner cycles are optimised to reduce fuel consumption by 20% compared to full load operation.



## Maximum efficiency

- Highly efficient, tried-and-tested "Made in Germany" burner technology.
- 4-pole electric motor with 3-piston axial pump.
- Water-cooled motor for a high performance and long service life.



## Multiple storage spaces for accessories integrated into the machine

- On-board storage for full range of accessories. Includes 2 hooks for suction hose and power cord.
- Spacious storage compartment, e.g. for detergents, gloves or tools.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



		Order no.	Description	
<b>TRIGGER GUNS</b>				
<b>Spray guns</b>				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	■
EASY!Force conversion kit 1 - from high-pressure hose	2	4.111-050.0	For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle.	□
EASY!Force conversion kit 2 - from machine	3	4.111-051.0	Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	□
EASY!Force conversion kit 3 - high-pressure gun	4	4.111-052.0	Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner.	□
<b>Servo control</b>				
Servo Control, 1100 l/h -	5	4.118-009.0	Water quantity and pressure regulated directly from the hand spray gun.	■
<b>SPRAY LANCES</b>				
<b>Rotating spray lances</b>				
Spray lance, 1050 mm, rotatable	6	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
LED nozzle light	7	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	□
Spray lance, 250 mm, rotatable	8	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	□
Spray lance, 400 mm, rotatable	9	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	□
Spray lance, 600 mm, rotatable	10	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 840 mm, rotatable	11	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 1550 mm, rotatable	12	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 2050 mm, rotatable	13	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance extender, 1000 mm	14	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	□

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



		Order no.	Description	
<b>SPRAY LANCES</b>				
<b>Double lance</b>				
Double lance, 960 mm	15	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use ( e.g. stable cleaning).	<input type="checkbox"/>
<b>Angular spray lance</b>				
Spray lance for toilets and rain gutters	16	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	<input type="checkbox"/>
<b>Flexible spray lance</b>				
Flexible lance, 1050 mm	17	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	<input type="checkbox"/>
High pressure articulated joint	18	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	<input type="checkbox"/>
<b>Gutter cleaner</b>				
Gutter cleaning lance	19	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	<input type="checkbox"/>
<b>Undercarriage spray lance</b>				
Underbody lance	20	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	<input type="checkbox"/>
<b>Additional handle</b>				
Additional handle for EASY!Lock spray lances	21	4.321-380.0	Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.	<input type="checkbox"/>
<b>KÄRCHER POWER NOZZLE</b>				
<b>Power nozzle spray angle 25°</b>				
Power nozzle 25°, 068	22	2.113-027.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	<input checked="" type="checkbox"/>
Power nozzle , 070	23	2.113-028.0		<input type="checkbox"/>
<b>HP nozzle spray angle 0°</b>				
Power nozzle 0°, 075	24	2.113-037.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
<b>Power nozzle spray angle 15°</b>				
Power nozzle 15°, 070	25	2.113-049.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	<input type="checkbox"/>
<b>Power nozzle spray angle 40°</b>				
Power nozzle 40°, 075	26	2.113-056.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	<input type="checkbox"/>
<b>HIGH-PRESSURE HOSES</b>				
<b>Longlife 400 with unions on both sides</b>				
High-pressure hose Longlife, 10 m, DN 8, 400 bar, 2 × EASY!Lock	27	6.110-038.0	Durable, 10 m long high-pressure hose (DN 8) with double steel core and EASY!Lock manual screw fitting on both sides and ANTI!Twist. Approved for 400 bar pressure.	<input checked="" type="checkbox"/>
High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 2 × EASY!Lock	28	6.110-024.0	1.5 m short high-pressure hose (DN 8). Comfortable EASY!Lock manual screw fitting on both sides for robust and quick connections. Durable and designed for up to 400 bar pressure.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



		Order no.	Description	
<b>HIGH-PRESSURE HOSES</b>				
<b>Standard with unions on both sides</b>				
High-pressure hose, 10 m, DN 8, 315 bar, 2 × EASY!Lock	29	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	<input type="checkbox"/>
High-pressure hose, 15 m, DN 8, 315 bar, 2 × EASY!Lock	30	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	<input type="checkbox"/>
High-pressure hose, 20 m, DN 8, 315 bar, 2 × EASY!Lock	31	6.110-032.0	20 m long high-pressure hose (DN 8) equipped with the time-saving and robust EASY!Lock manual screw fitting on both sides. Approved for pressures up to 315 bar.	<input type="checkbox"/>
High-pressure hose, 30 m, DN 8, 315 bar, 2 × EASY!Lock	32	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	<input type="checkbox"/>
<b>Food industry version with unions on both sides</b>				
High-pressure hose food grade, 10 m, DN 8, 250 bar, 2 × EASY!Lock	33	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With quick and robust EASY!Lock hand screw connection at both ends.	<input type="checkbox"/>
High-pressure hose food grade, 20 m, DN 8, 250 bar, 2 × EASY!Lock	34	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	<input type="checkbox"/>
<b>Longlife food design with screw connections at both ends</b>				
High-pressure hose food grade Longlife, 10 m, DN 8, 400 bar, 2 × EASY!Lock	35	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.	<input type="checkbox"/>
<b>Special hoses</b>				
High-pressure hose curved, 1.5 m, DN 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	36	6.110-068.0	For connection to hose reels: high-pressure hose, with M 22 × 1.5 connection and curved EASY!Lock hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.	<input type="checkbox"/>
<b>WEED CONTROL</b>				
WR 50	37	2.114-013.0	In combination with a hot water high-pressure cleaner from Kärcher, the 50 cm wide weed remover WR 50 is ideal for removing weeds. It comes with an adaptive chassis and nozzle adapter.	<input type="checkbox"/>
WR 20	38	2.114-014.0	For thorough weed removal: The WR 20 weed remover for use with a hot water high-pressure cleaner from Kärcher. Equipped with a 20 cm wide nozzle bar and nozzle adapter.	<input type="checkbox"/>
WR 100	39	2.114-015.0	Comfortable and fast weed removal: WR 100 weed remover with chassis, 100 cm wide nozzle bar and integrated nozzle adapter for use with hot water high-pressure cleaners.	<input type="checkbox"/>
WR 10	40	2.114-016.0	In combination with hot water high-pressure cleaners our WR 10 weed remover enables fast and thorough weed removal. With 10 cm spray head and nozzle adapter.	<input type="checkbox"/>
<b>ECO!BOOSTER</b>				
HydroBooster JET TR 080 Professional	41	2.113-089.0		<input type="checkbox"/>
<b>QUICK CONNECT</b>				
Quick coupling	42	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



		Order no.	Description	
<b>QUICK CONNECT</b>				
Male coupling	43	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 x 1.5 external thread.	<input type="checkbox"/>
<b>DRUM AND TANK CLEANING</b>				
Add-on kit mud sucker	44	2.641-798.0	For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.	<input type="checkbox"/>
<b>OTHER HP ACCESSORIES</b>				
Jet gun	45	2.869-067.0	Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume.	<input type="checkbox"/>
<b>FLUE PIPE</b>				
Exhaust gas nozzle	46	4.656-079.0	Exhaust gas nozzle (oval connection, diameter 157 mm) for connection to the hot water high-pressure cleaner. With draught diverter for flue tube connection. For flue tube diameter up to 200 mm.	<input type="checkbox"/>
<b>ROTARY NOZZLES (DIRT BLASTERS)</b>				
<b>Dirt blaster, large</b>				
Dirt blaster, large, 070/080	47	4.114-030.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>
<b>MULTIPLE-JET NOZZLES</b>				
<b>Angled vario nozzle 0-90°</b>				
Angled Vario nozzle, 055	48	4.113-008.0	Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces.	<input type="checkbox"/>
<b>STEAM JET NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE</b>				
<b>Steam jet nozzles</b>				
Steam jet nozzle 50°	49	4.116-001.0	50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles.	<input type="checkbox"/>
Steam jet nozzle 40°, 110	50	2.114-012.0	Brass steam nozzle for operation of the HDS in steam stage.	<input type="checkbox"/>
<b>NOZZLE UNION / SPACER</b>				
<b>Nozzle union</b>				
Nozzle screws	51	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	<input type="checkbox"/>
<b>PIPE CLEANING</b>				
<b>Pipe cleaning hose, ID 6</b>				
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	52	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	53	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	54	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
<b>Pipe cleaning nozzle</b>				
Pipe cleaning dirt blaster D21/090	55	4.765-003.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Pipe cleaning dirt blaster D30/090	56	4.765-010.0		<input type="checkbox"/>

Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



	Order no.	Description	
<b>PIPE CLEANING</b>			
<b>Pipe cleaning nozzle</b>			
Pipe cleaning nozzle 100	57	5.763-088.0	Pipe cleaning nozzle with 24 mm diameter. With 4 nozzles tilted back at a 30° angle. <input type="checkbox"/>
Pipe cleaning nozzle	58	5.763-019.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. <input type="checkbox"/>
	59	5.763-020.0	
	60	5.763-021.0	30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. <input type="checkbox"/>
<b>FLOOR AND HARD SURFACE CLEANER</b>			
<b>Hard Surface Cleaner FRV 30</b>			
Hose fastening attachment kit	61	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces. <input type="checkbox"/>
Dirt trap attachment kit	62	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas. <input type="checkbox"/>
<b>FR 30 Me surface cleaner</b>			
Hard Surface Cleaner FR 30 Me	63	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry. <input type="checkbox"/>
<b>Hard Surface Cleaner FR 50</b>			
Surface Cleaner FR 50 Me	64	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system. <input type="checkbox"/>
<b>Machine-specific nozzle kits for FR</b>			
Nozzle kit for FR, 1100 l/h - 1300 l/h	65	2.639-188.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (1100 to 1300 l/h). <input type="checkbox"/>
<b>Machine-specific nozzle kits for FRV</b>			
Nozzle kit for FRV, 080	66	2.642-982.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30. <input type="checkbox"/>
<b>FRV 30 Me surface cleaner</b>			
FRV 30 Me Surface Cleaner	67	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C. <input type="checkbox"/>
Extension hose FRV 30 Me and FRV 50 Me	68	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter. <input type="checkbox"/>
<b>Surface Cleaner FR 50 Me</b>			
FRV 50 Me surface cleaner	69	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces - this means the FRV 50 Me. Hot water cleaning up to 85°C. The FRV 50 Me features a temperature-resistant 10 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 2000 l/h / 85°C. <input type="checkbox"/>
<b>FOAM SYSTEMS</b>			
<b>Cup foam lance</b>			
Cup foam lance Advanced 3, 900 l/h - 2500 l/h	70	4.112-065.0	Specially designed for use with aggressive cleaning agents: High-quality cup foam lance Advanced 3 with spray angle adjustment and EcoBrass for high-pressure cleaners from Kärcher. <input type="checkbox"/>

Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



		Order no.	Description	
<b>FOAM SYSTEMS</b>				
<b>Cup foam lance</b>				
Cup foam lance DUO Advanced 3, 900 l/h - 2500 l/h	71	4.112-069.0	DUO Advanced 3 cup foam lance, designed for use with aggressive detergents. With instant switching to high-pressure cleaning, spraying angle adjustment and two-litre tank.	<input type="checkbox"/>
Cup foam lance Basic 3, 900 l/h - 2500 l/h	72	4.112-055.0	High-quality, simple and durable: Basic 3 cup foam lance for high-pressure cleaners with a flow rate of 900-2500 l/h. Halves the cleaning agent consumption while maintaining optimum foam quality.	<input type="checkbox"/>
1-litre cleaning agent container for cup foam lance basic	73	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	<input type="checkbox"/>
1-litre cleaning agent container for cup foam lance advanced	74	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	<input type="checkbox"/>
<b>Inno Foam Kit</b>				
Inno Foam Set with detergent injector	75	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Inno Foam Set	76	2.112-008.0		<input type="checkbox"/>
<b>Easy Foam Set</b>				
Easy Foam Set with RM injector	77	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Easy Foam Set	78	2.112-011.0		<input type="checkbox"/>
<b>Nozzle kits for Inno/Easy Foam Set</b>				
Nozzle kit 110 for Inno / Easy Set 1,000-1,300 l/h	79	2.111-020.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	<input type="checkbox"/>
<b>Foam nozzle mounting kit</b>				
Foam nozzle attachment kit	80	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>
<b>MIXERS AND INJECTORS</b>				
<b>Cleaning agent injector</b>				
Cleaning agent injector for high and low pressure (without nozzles)	81	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
Cleaning agent injector for high pressure (without nozzle)	82	4.637-033.0	Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
<b>Machine-specific nozzle kit with order no. 4.637-033.0</b>				
Nozzle kit 1000-1200 l/h	83	4.769-013.0	For HD/HDS 1000 - 1200 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
<b>Nozzle insert with order no. 4.637-032.0</b>				
Nozzle insert from 1,100 l/h - HD	84	4.769-002.0	For high pressure with machines above 1.100 l/h	<input type="checkbox"/>

Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



	Order no.	Description	
<b>MIXERS AND INJECTORS</b>			
<b>Nozzle insert with order no. 4.637-032.0</b>			
Nozzle insert from 1,100 l/h - ND	85	4.769-006.0	For low pressure with machines above 1.100 l/h <input type="checkbox"/>
<b>COUPLING PARTS</b>			
<b>Rotary coupling</b>			
Rotary coupling	86	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection <input type="checkbox"/>
<b>Connector</b>			
Screw socket for surface cleaners and Servo Control controllers	87	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 × M 22 × 1.5/1 × M 18 × 1.5. <input type="checkbox"/>
Y distributor	88	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet. <input type="checkbox"/>
Short spray unit	89	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles. <input type="checkbox"/>
<b>EASY!Lock adapter</b>			
Adapter 1 M22AG-TR22AG	90	4.111-029.0	Adapter 1 to connect the old hose with the new hose <input type="checkbox"/>
Adapter 2 M22IG-TR22AG	91	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose <input type="checkbox"/>
Adapter 3 M22IG-TR22AG	92	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator <input type="checkbox"/>
Adapter 4 TR22IG-D11	93	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose <input type="checkbox"/>
Adapter 5 TR22IG-M22AG	94	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance <input type="checkbox"/>
Adapter 6 TR22IG-M22AG	95	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun <input type="checkbox"/>
Adapter 7 M18IG-TR20AG	96	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle <input type="checkbox"/>
Adapter 8 TR20IG-M18AG	97	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle <input type="checkbox"/>
Adapter hose extension 9 TR	98	4.111-037.0	Adapter 9 to connect the new hose with the new hose <input type="checkbox"/>

Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



		Order no.	Description	
<b>COUPLING PARTS</b>				
<b>EASY!Lock adapter</b>				
Adapter 12 rotary coupling EASY!Lock 22 IG - M22 x 1.8 AG	99	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	<input type="checkbox"/>
<b>HOSE REELS</b>				
<b>Automatic, self-winding hose reels for wall mounting</b>				
Automatic plastic hose reel incl. high-pressure hose, 15 m	100	2.639-257.0	Spring-mounted and ready-to-use automatic hose reel for wall mounting. Simplifies handling of the high-pressure hose, shortens set-up times and increases occupational safety.	<input type="checkbox"/>
Automatic hose reel, powder-coated steel / plastic, 20 m	101	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic stainless steel / synthetic material hose drum, 20 m	102	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic hose reel, coated, 20 m	103	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Hose reel, automatic, basalt grey-coated, 20 m	104	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).	<input type="checkbox"/>
Automatic hose reel, stainless steel, includes swivel holder, 20 m	105	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Automatic stainless steel hose reel, 40 m	106	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	<input type="checkbox"/>
Zinc-coated swivel holder	107	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Stainless steel swivel holder	108	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>
<b>Automatic, self-winding hose reel attachment kit</b>				
Attachment kit automatic hose reel HDS M/S	109	2.110-011.0	Automatic hose reel as a complete attachment kit that's easy to mount. Suitable for HDS medium and super class. For maximum convenience when winding and unwinding the high-pressure hose.	<input type="checkbox"/>
Attachment kit automatic hose reel holder HDS M/S	110	2.110-020.0	Holder includes connection material for installing an automatic hose reel to machines in the HDS Middle and Super classes.	<input type="checkbox"/>
Attachment kit automatic hose reel HDS M/S class	111	2.110-030.0	Automatic hose reel incl. 20 m Teflon-coated Ultra Guard high-pressure hose. The complete mounting kit is easy to fit and suitable for the HDS Middle Class and Super Class.	<input type="checkbox"/>
<b>FACADE AND SOLAR PANEL CLEANING</b>				
<b>Brushes</b>				
Brush hard	112	6.960-133.0	Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	<input type="checkbox"/>

Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S 1.071-959.0



	Order no.	Description	
<b>FACADE AND SOLAR PANEL CLEANING</b>			
<b>Brushes</b>			
Brush medium	113	6.960-134.0	Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher. <input type="checkbox"/>
Brush soft	114	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems. <input type="checkbox"/>
iSolar 800 Advanced (1100-1300 l/h)	115	6.368-095.0	For water flow rates of 1,100–1,300 l/h: The 800-mm iSolar water-driven brush head with two contra-rotating disc brushes and flexible angle joint ensures that photovoltaic systems are given an even clean. <input type="checkbox"/>
iSolar 400 Advanced	116	6.368-093.0	The iSolar 400 water-driven disc brush (working width 400 mm) is designed for water flow rates of 1,100–1,300 l/h. For small to medium-sized photovoltaic systems (including elevated systems). <input type="checkbox"/>
<b>Telescopic lances</b>			
TL low pressure adapter	117	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes. <input type="checkbox"/>
Telescopic lance TL 7 F	118	4.762-609.0	Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension. <input type="checkbox"/>
Telescopic lance TL 7 H	119	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach. <input type="checkbox"/>
Telescopic lance TL 10 H	120	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners. <input type="checkbox"/>
Telescopic lance TL 10 C	121	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels. <input type="checkbox"/>
Telescopic lance TL 14 C	122	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners. <input type="checkbox"/>
TL high pressure adapter	123	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals. <input type="checkbox"/>
<b>Water softening</b>			
WS 50	124	6.368-463.0	The mobile WS 50 water softening unit prevents lime residue from forming on cleaned surfaces. This is achieved by an ion-exchange resin that removes the dissolved limescale from the water. <input type="checkbox"/>
WS 100	125	6.368-464.0	The mobile WS 100 water softening unit prevents lime residue from forming on cleaned surfaces. This is achieved by an ion-exchange resin that removes the dissolved limescale from the water. <input type="checkbox"/>
WS Regenerator	126	6.368-465.0	With the WS Regenerator regeneration system, the softening cartridges of the water softening units WS 50 and WS 100 can be backflushed and regenerated at the push of a button. <input type="checkbox"/>

Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



	Order no.	Description	
<b>FACADE AND SOLAR PANEL CLEANING</b>			
<b>Hoses</b>			
iSolar HP hose 7	127	6.392-978.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod. <input type="checkbox"/>
iSolar HP hose 10	128	6.392-977.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod. <input type="checkbox"/>
iSolar HP hose 14	129	6.392-976.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod. <input type="checkbox"/>
<b>Attachment kits and adapters</b>			
iSolar fall protection	130	6.988-152.0	Certified personal security system for rooftop work. Contents: Travelling fall arrestor with shock absorber and 15 m kernmantle rope, harness, anchoring sling and sheet steel case. <input type="checkbox"/>
<b>WET BLASTING ATTACHMENT</b>			
<b>Wet blasting attachment (without nozzle)</b>			
Wet blasting attachment with flow control (without nozzles)	131	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. <input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	132	4.115-006.0	Addition of spray agent to the high pressure jet. For paint stripping, rust removal and descaling. Assembly on spray lance instead of high-pressure nozzle. Without water flow regulation <input type="checkbox"/>
<b>Nozzle kits for wet jet unit</b>			
Nozzle kit for wet jet unit 070	133	2.112-027.0	Consisting of wet jet nozzle and nozzle insert - only for use in combination with wet jet unit 4.115-000.0   4.115-006.0. <input type="checkbox"/>
<b>Boron carbide nozzle</b>			
Boron carbide, for machines from 1,000 l/h	134	6.415-083.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation. <input type="checkbox"/>
<b>DRUM AND TANK CLEANING</b>			
<b>Barrel and tank cleaning</b>			
Barrel cleaner BC 14/12	135	2.112-020.0	The BC 14/12 barrel cleaner is a spray unit for the interior cleaning of containers and barrels - especially oak barrels with a capacity of between 225 and 600 litres. <input type="checkbox"/>
<b>ADD ON KITS</b>			
<b>Flame monitoring attachment kit</b>			
Flame monitoring attachment kit for HDS Middle and Super Class	136	2.641-796.0	More safety thanks to ABS HDS M/S flame monitoring system: A light sensor monitors the burner flame. The fuel supply cuts out automatically if the flame extinguishes. <input type="checkbox"/>
<b>WATER CONNECTION</b>			
<b>Geka coupling</b>			
Geka connector with hose barb, R 3/4"	137	6.388-455.0	with hose liner <input type="checkbox"/>
Geka connector with hose barb, R 1"	138	6.388-465.0	with hose barb <input type="checkbox"/>
Geka connector with internal thread, R 1"	139	6.388-458.0	with female thread <input type="checkbox"/>
<b>Suction filter</b>			
Water suction filter	140	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve <input type="checkbox"/>

Available accessories.

## ACCESSORIES FOR HDS 12/18-4 S

### 1.071-959.0



141



143



144



145-146



147



148



149

		Order no.	Description	
<b>WATER CONNECTION</b>				
<b>Suction filter</b>				
Suction filter with check valve	141	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
<b>Water fine filter</b>				
Universal water fine filter, 25 µm	142	2.637-020.0	Water fine filter, mesh size 25 µm, max. temperature 50 °C. Protects the machine from small dirt particles in the water. Water volume up to 1200 l/h. 3/4" connection, with 1" adapter.	<input type="checkbox"/>
Water fine filter, with adapter	143	4.730-102.0	Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water fine filter, 100 µm, R 1"	144	2.638-270.0	Fine-mesh water filter, 100 µm, max. temperature 60°C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connector 1".	<input type="checkbox"/>
<b>Water supply hose</b>				
Water supply hose	145	4.440-207.0	NW 19 R1" / R 3/4", up to 85 °C, for pick-up	<input type="checkbox"/>
	146	4.440-270.0	NW 19 R1" / R1", up to 85 °C	<input type="checkbox"/>
<b>WASHING BRUSHES</b>				
<b>Push-on washing brush</b>				
Push-on wash brush	147	4.113-001.0	For universal use for surface cleaning. Mounted using clamp directly at the spray lance. TR thread connection	<input type="checkbox"/>
<b>Rotating washing brush</b>				
Rotating wash brush for > 1000 l/h machines, nylon bristles	148	4.113-002.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert).	<input type="checkbox"/>
Rotating wash brush for > 800 l/h machines, natural bristles	149	4.113-005.0		<input type="checkbox"/>

Available accessories.