

SENCO[®]MAKING HARD WORK
EASIER**SN951XP**

Clipped head framing nailer



Technical specifications

Dimension (LxWxH)	440x120,9x351 mm
Net weight	4 kg
Firing mode	Dual
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	223,7 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	79 dB
Sound power level (Lwa)	92 dB
Vibration level	3,8 m/s ²
Collation type 1	Paper collated
Collation angle	34 °


Applications

Engineered lumber, framing, sheathing, truss building, sub-floor, decking and industrial applications. Other applications include crate and box assembly, pallet making, furniture frame assembly and fencing.

Features & Benefits

- 20% more powerful than standard framing nailers - yet weighs only 4 kilo!
- Tool free depth of drive
- Well balanced, ergonomic design
- Uses less air to drive nails- Highly efficient internal design
- Dry Fire Lockout
- Reduced jams and mis-feeds - Patented TrueDrive magazine
- Low profile design fits easily between studs and joists
- Retractable Rafter Hanger
- Contact or sequential trigger actuation - Patented drive selector

Fastener specification

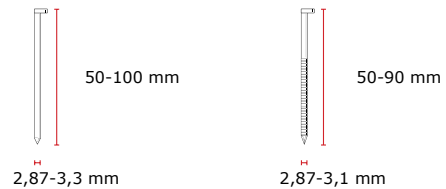

Description

SN951XP, CH framing nailer

Art. Nr.

5B2001N

EAN code

0741474113468