

Dryer CTR 150XT

CTR 150XT is the smallest machine in the series. Light, compact and very quiet.

Thanks to the clever design and technological solutions great flexibility has been achieved. The two Ø 50 mm dry air outlets mean that the air can be distributed to different areas.

When drying in sensitive environments a hygostat can be connected to the machine. When drying layered constructions the dryer is specially adapted to fit CTR T100XT and CTR T150XT in our turbine program.



Part no. 20150




Dry air outlet, two Ø 50 mm

Technical data

Capacity +20°C, 60% RH	12 l/24hrs
Dry air volume	125 m ³ /h
Dry air	2 x Ø 50 mm
Humid air	Ø 50 mm
Connection	230 V/50 Hz
Regeneration battery	800 W
Connection effect	875 W
Actual consumption	approx 800 W
Noise level (3 m)	55 dB
Weight	11 kg
Size	width 280 mm
	depth 360 mm
	height 330 mm

Capacity curve

Based on the unique XT rotor, the dehumidifier has a high capacity even at low relative humidity.

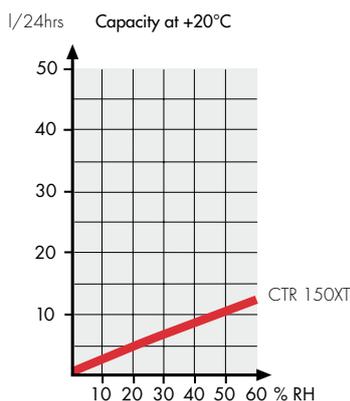

Accessories

Hygostat HR1-5
Replacement filter 20184

System solutions

Turbine CTR T100XT
Turbine CTR T150XT