


# EE RING STRIPNAIL 2,3X50MM CARBON STEEL STANDARD TENSILE

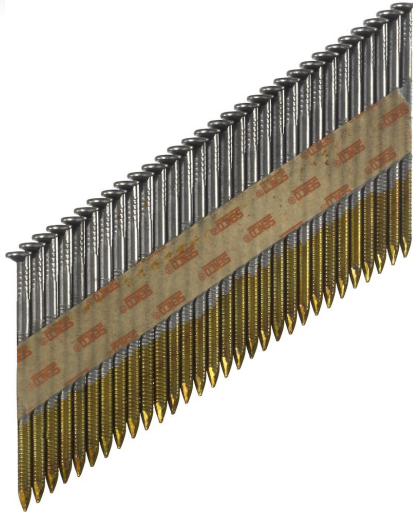

## EE51ASB

### APPLICATIONS

Framing, sheathing, subfloor, decking, trusses, pallets and crates


### TECHNICAL SPECIFICATIONS

Collation angle	34 °
Collation type	Paper collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Sencoted
Nail head type	Clipped head
Head width	6.22 - 6.6 mm
Head length	4.39 - 4.64 mm
Nail shank type	Ring shank
Point type	Diamond
Pointangle	36 °
Nail length	50 mm
Nail diameter	2.3 mm

### LOGISTICAL SPECIFICATIONS

GTIN	4032933225218
Package quantity	3000 pieces
Net weight	5.67 kg

### FASTENER SPECIFICATIONS



### CE SPECIFICATIONS

CE fastener type	Round cross-section ring shank nail
Protection level in micron	55
Service class	3
Coating type	Coating type 3
Coating length	31 mm
Head cross sectional area	24 mm
Threaded/profiled length	30 mm
Characteristic yield moment	1575 Nmm
Characteristic head pull through parameter	22.45 N/mm <sup>2</sup>
Characteristic tensile strength	633 N/mm <sup>2</sup>