


SURFACE MOUNTED SAFETY POST

Use at


- Vault edges
- Staircase landings
- Edges at vault openings

C-C with steel net element 2.2 m

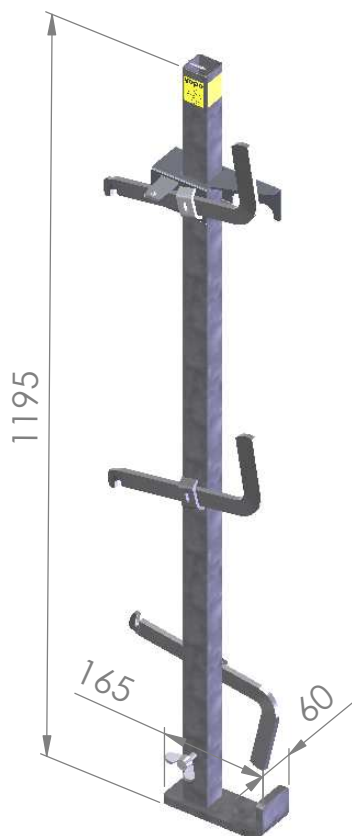

Tensile value for the fastening
10kN

Hole for fastening $\varnothing 14$

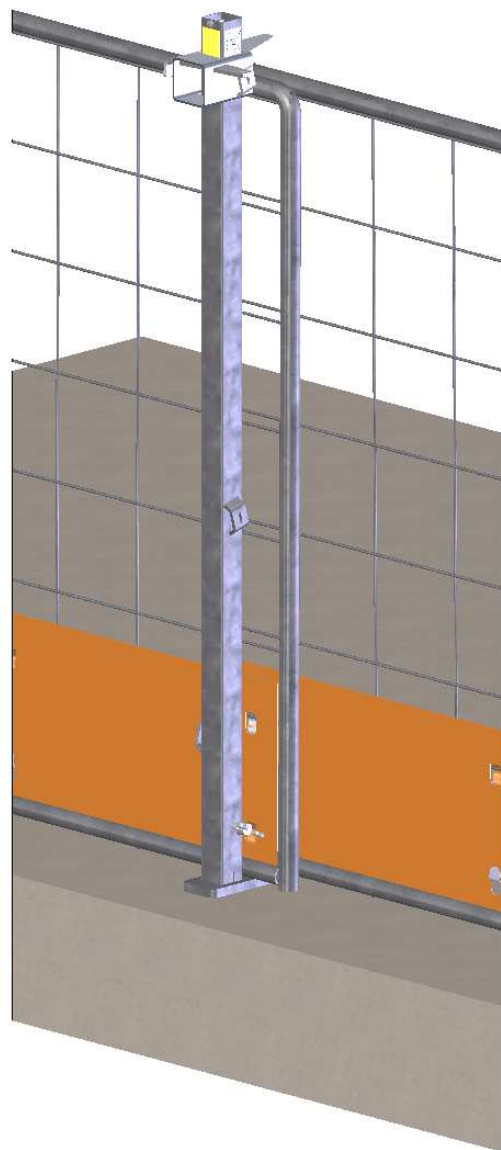

- **Weight** ca 6.7 kg

Codes

- for steel net element 420055
- for separate guardrails 420050

With separate guardrails

- Handrail 50 x 100 T24
- Intermediary rail 50 x 100 T24
- Toeboard 22 x 150
- C-C with 2 openings 3.0 m
- C-C with 1 opening 2.4 m

vepe

www.vepe.fi



tel. + 358 9 2747 220

Always check user's manual before installation

SURFACE MOUNTED SAFETY POST

Fastening

- Onto sleeve installed into concrete element
- Onto sleeve 50x50x3 L=200

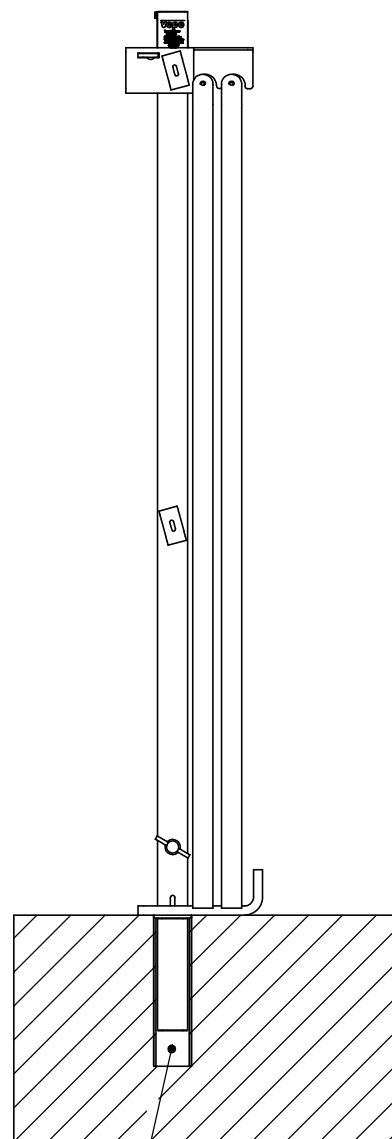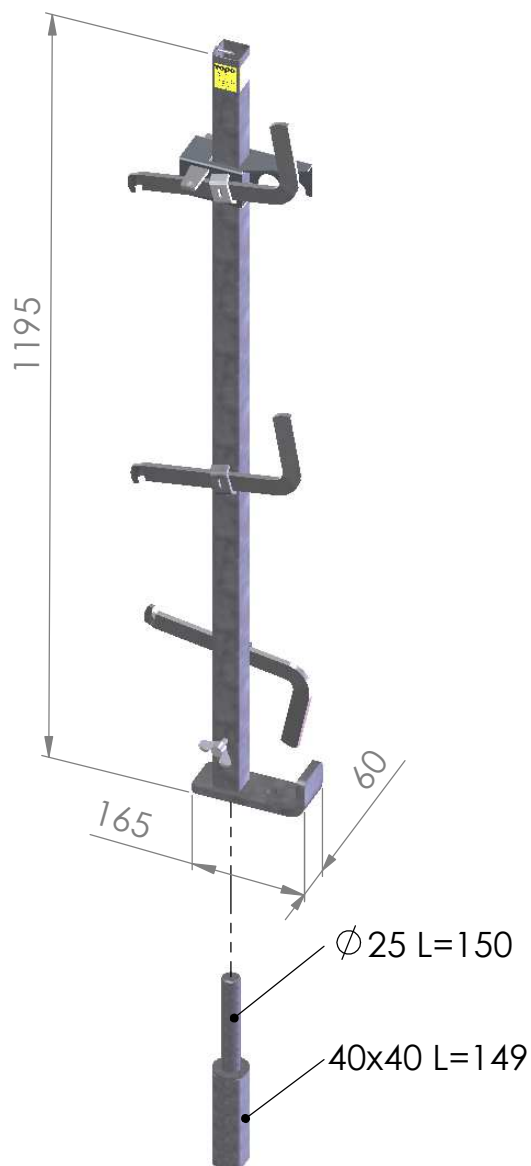

Sleeve 50x50x3 L=200

Weight

- Post ca 6.7 kg
- Adapter ca 1.6 kg

Code

- Adapter 420103

vepe

www.vepe.fi

tel. + 358 9 2747 220

Always check user's manual before installation