

VERSALIFT

VTL-130-FZ

Pickup mounted telescopic platform



Ford Ranger
(3,200 kg GVW)



Available for class B
driving licence



LMC controls with
variable outreach



Emergency lowering
controls at the pedestal



Knuckle/turret tailswing
within the mirrors



1 kV certified low
voltage insulation

VERSALIFT

A TIME MANUFACTURING COMPANY

Available specifications



Dimensions




Length: 6,625 mm **Height:** 2,555 mm **Wheelbase:** 3,220 mm


Additional equipment

- Outrigger pads with holders
- Hydraulic axle locking system
- Flashing lights on the roof
- Aluminium cabinets for the chassis
- Safety stripes (red/white)
- Tilt sensor
- Inverter
- Reversing camera
- Display in the upper control panel
- Stow guide & limited working area without outriggers

Diagramme(s)

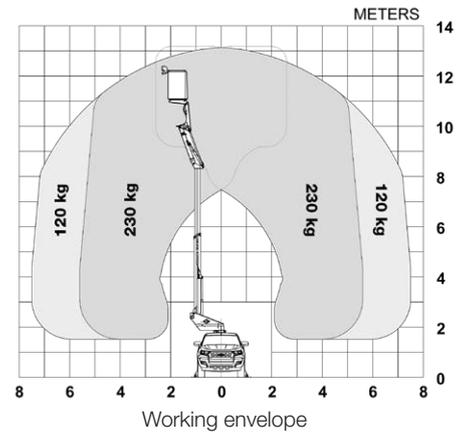

Working envelope

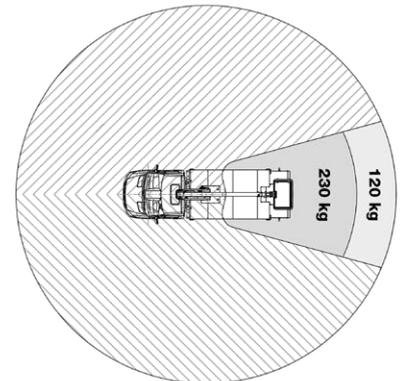

Limited working area without outriggers (optional)

Key features



The shaped profile ultra high strength steel booms provide improved rigidity, stiffness and performance



Ground level emergency lowering from the chassis (pedestal mounted valve bank)



Aluminium cabinets for the chassis (optional)



LMC (Load Moment Controls): Variable outreach and up to 2 actions at a time (1 per joystick)

Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

* Depending on the vehicle.

** Max payload with a driver, a passenger and a full tank of fuel (220 kg added to the installation weight).

Distributor