


DIMENSIONS

Complete Panel Size:
2400mm (H) x 600mm (W) x 21mm (D)

Timber Slats:
27mm (W) x 12mm (D)

PET Felt Backing:
9mm (D)

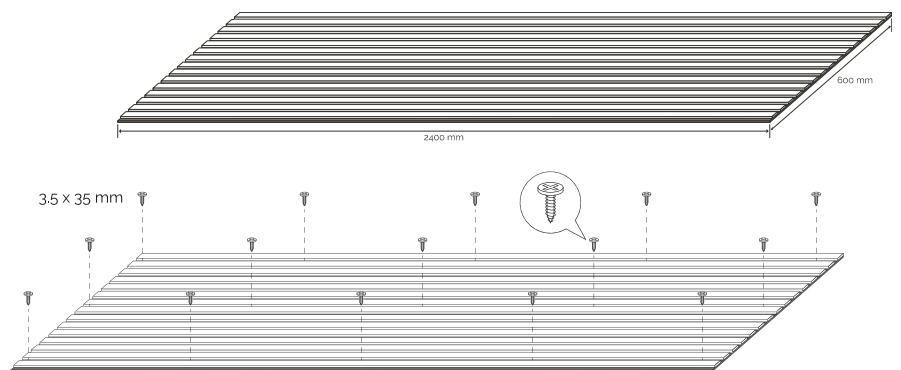

STANDARD VENEER FACES

Available in a range of real wood face veneers. Please see our website for the latest options.

BESPOKE OPTIONS AVAILABLE

- Range of felt colours
- Variety of wood veneers
- Bespoke colour finishes
- Protective oil finishes

**minimum order requirements, please contact us for more details.*

PREPARATION

Ensure your wall is clean and remove any screws, nails or other fixings.

INSTALLATION

- Install using 15 x black drywall screws (35mm x 3.5mm) through the felt gaps between the slats and into your wall.
- Top Tip: Use the appropriate fixings for your wall (i.e. wall plugs)
- The screws should be in rows of 3 spaced at 200mm intervals and 5 rows high at intervals of 600mm.
- If you are installing SlatWall on a ceiling ensure your fixings are into structural points, such as joists.
- For maximum acoustic performance (Class A) install the panels onto 45mm (D) battens and use 45mm mineral wool between the battens.

CUTTING

- Measure and mark your cut line using a pencil and square edge.
- You can cut the panels using a normal handsaw or power tools.
- The felt can be cut with a sharp utility knife.

FIXTURES

- You can mount fixtures including tv brackets through the panels by using the appropriate wall plugs and screws.