


# NEW PRODUCT ANNOUNCEMENT



## HYBRID RUBBER AIR HOSE - Super Heavy Duty

- Polymer construction for heaviest duty applications
- UV, ozone, and chemical resistance for longevity
- 300 psi max. working pressure, 1,200 psi burst pressure for safe shop application
- Temperature range -40°C to 82°C (-40°F to 180°F)


| PROD. NO. | MOD. NO. | INSIDE DIAMETER | LENGTH | NPT  |
|-----------|----------|-----------------|--------|------|
| 408193    | AH3825HY | 3/8"            | 25'    | 1/4" |
| 408194    | AH3850HY | 3/8"            | 50'    | 1/4" |
| 408195    | AH1225HY | 1/2"            | 25'    | 1/2" |
| 408196    | AH1250HY | 1/2"            | 50'    | 1/2" |

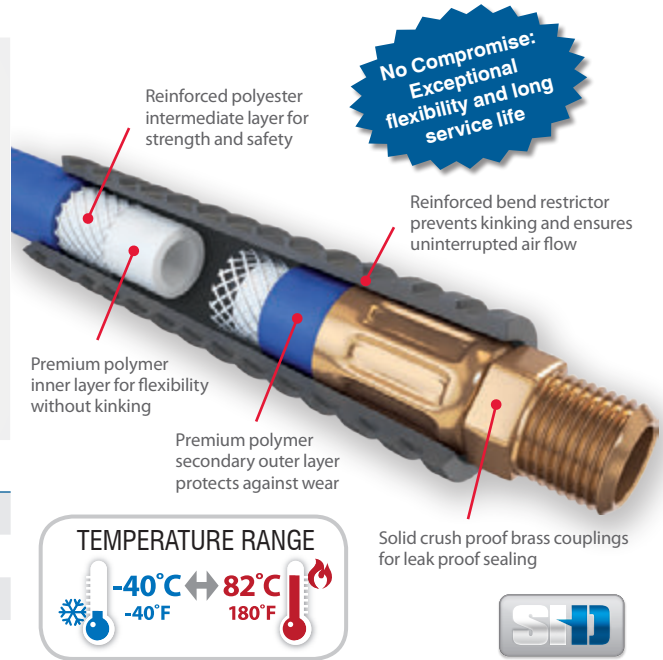

## EPDM\* RUBBER AIR HOSE

- UV, ozone, and chemical resistance for longevity
- 300 psi max. working pressure, 1,200 psi burst pressure for safe shop application
- Temperature range -30°C to 88°C (-22°F to 190°F)

| PROD. NO. | MOD. NO.   | INSIDE DIAMETER | LENGTH | NPT  |
|-----------|------------|-----------------|--------|------|
| 408180    | AH1425RB   | 1/4"            | 25'    | 1/4" |
| 408181    | AH1450RB   | 1/4"            | 50'    | 1/4" |
| 408182    | AH3825RB   | 3/8"            | 25'    | 1/4" |
| 408183    | AH3850RB   | 3/8"            | 50'    | 1/4" |
| 408184    | AH38100RB  | 3/8"            | 100'   | 1/4" |
| 408185    | AH1225RB   | 1/2"            | 25'    | 1/2" |
| 408188    | AH1250RB38 | 1/2"            | 50'    | 3/8" |
| 408186    | AH1250RB   | 1/2"            | 50'    | 1/2" |
| 408187    | AH12100RB  | 1/2"            | 100'   | 1/2" |

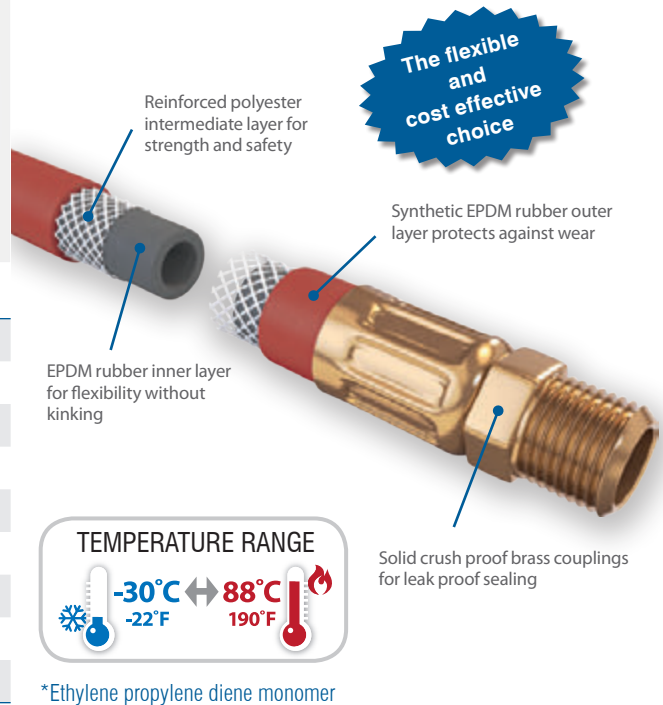

## PROFESSIONAL TOOLS. PROFESSIONAL RESULTS.

This product is covered by SureWerx against defects in materials and workmanship when the product is used for the purpose for which it was designed. Please refer to [surewerx.com](http://surewerx.com) for more warranty information.



[surewerx.com](http://surewerx.com)

