

## For the Latest Chip Information

Please visit Static Control's Online Chip Center for a listing of all the cartridges the Static Control E260/360/460 replacement chip is qualified with. The Chip Center is online at <http://www.scc-inc.com/chipcenter/>. Contact your Static Control Support Team for product information, ordering and technical support services. For the latest cartridge information and other SSS™ documents available in Adobe® Acrobat® format, visit [www.scc-inc.com](http://www.scc-inc.com).




**Important:** It is important to use the correct yield chip with the correct yield cartridge. Failure to do so will result in cartridge problems, printer problems and customer complaints.


Static Control's chip will perform in exactly the same functional way as the OEM chip when the correct yield chip is used with the correct yield cartridge.

## Instructions for Removal and Installation


1. Locate the spent chip on the cartridge (Figure 1).

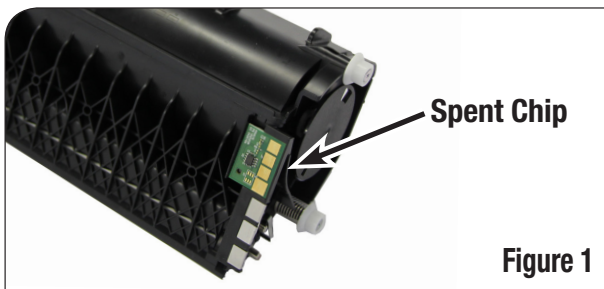


2. Insert a small slotted screwdriver under the corner and gently pry it from the cartridge (Figure 2). Other pry points may be used (noted in Figure 2).

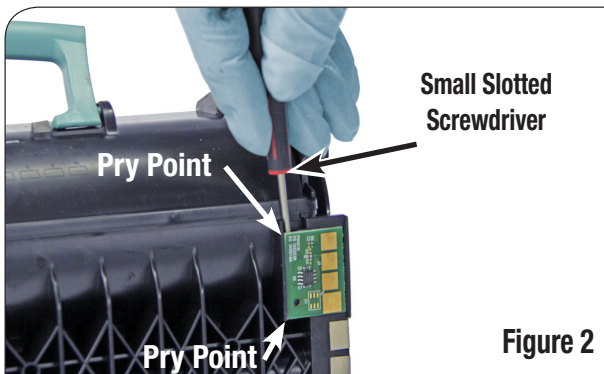


3. Remove the tape on the back of the new chip, exposing the adhesive (Figure 3).

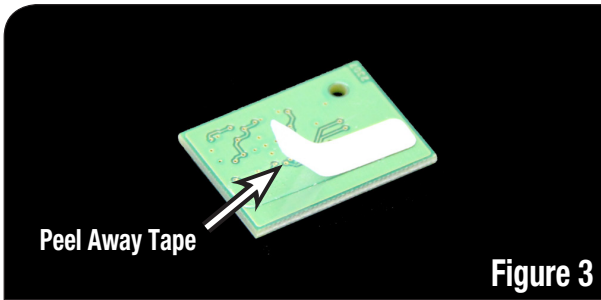

4. Align the replacement chip with the edge of the cartridge. Make certain the largest contact is on the bottom, outside of the recess as shown in Figure 4.

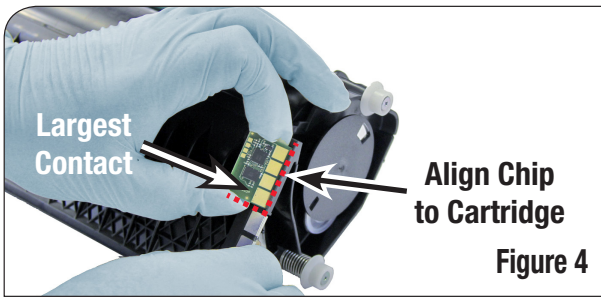

5. Press the new chip firmly in place to complete installation (Figure 5).

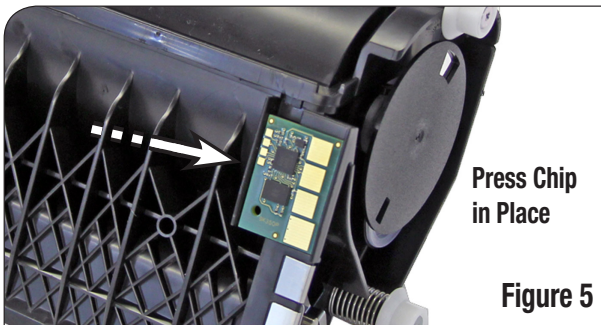

V.2 - 03.11

---

---

## For direct technical support, please call:

US/Canada: 800 488 2426, Int'l +1 919 774 3808 • Europe: + 44 (0) 118 923 8800

China: 800 630 0700 • Hong Kong: +852 2427 6011 • South Africa: +27 (0) 11 973 1930

[www.scc-inc.com](http://www.scc-inc.com) • [www.sceurope.co.uk](http://www.sceurope.co.uk) • [www.scc-inc.cn](http://www.scc-inc.cn)