



Replacement Chip for HP® 950/951/932/933 Cartridges

SSS™ 1229

V1.2 : 06-14



For the Latest Chip Information

Please visit Static Control's Chip Center for a listing of all the cartridges for which these chips are qualified. The chip center is located online at www.scc-inc.com/chipcenter. Contact your Static Control Support Team for product information, ordering and technical support services. For the latest cartridge information and other SSS™ documents, please visit www.scc-inc.com.

Chip markings may vary depending on region and color. Chip appearance subject to change. Pictures and images may not be reflective of current offering.



Warning: To prevent damage, personal grounding devices such as Static Control's Field Service Kit (FSKL3RD), should always be used when working with static sensitive components.


TOOLS & SUPPLIES

- Angle Blade Knife Tool (ABKTOOL)
- Field Service Kit (FSKL3RD)
- Rubber Gloves
- Lint-Free Swab (LFSWAB)
- 91-99% Isopropyl Alcohol




Note: After cleaning, ensure the chip mounting surface is completely dry prior to installing the new chip.

STEP 1.1

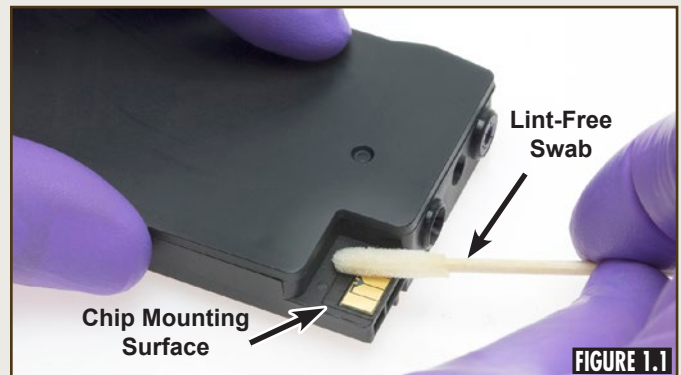

Clean the chip mounting surface using a lint-free swab dampened with 91-99% isopropyl alcohol as shown in Figure 1.1.

STEP 1.2

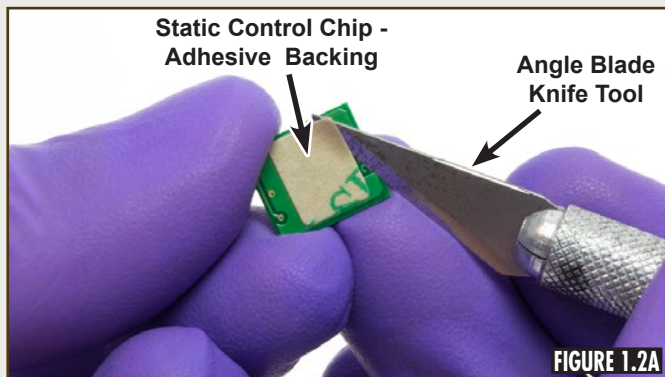


Use an angle blade knife tool to remove the adhesive backing from the new Static Control chip (Figure 1.2A) and to position it over the spent chip (Figure 1.2B).





Note: The new Static Control chip should lie flat and be aligned flush with the edge of the cartridge when installed properly (Figure 1.2C).

STEP 1.3

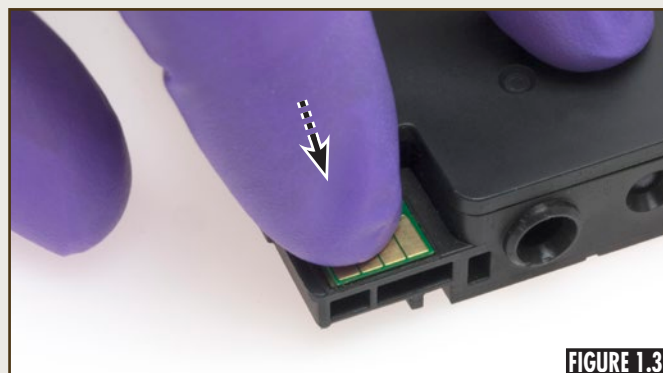

Once the replacement chip has been placed and properly aligned, apply pressure to the chip to activate the adhesive as shown in Figure 1.3.

STEP 1.4

Cartridge	Suggested Total Ink Fill (from cleaned cartridge) (ml)
950K	38.1
951C	11.9
951M	13.0
951Y	12.1
950XLK	86.0
951XLC	24.4
951XLM	26.6
951XLY	25.5

FIGURE 1.4A

Determine the suggested ink fill volume according to the charts (Figure 1.4A and 1.4B) when using a Static Control replacement chip.

Cartridge	Suggested Total Ink Fill (from cleaned cartridge) (ml)
932K	13.5
933C	5.90
933M	6.30
933Y	5.70
932XLK	34.9
933XLC	13.8
933XLM	14.9
933XLY	13.3

FIGURE 1.4B

DEDICATION TO TRAINING

In order to produce consistent high quality prints that are virtually indistinguishable from the OEM, it is essential to follow Static Control's remanufacturing instructions exactly as directed. Static Control is dedicated to informing customers of the latest innovations in training and knowledge. Access to these instructions, our technical support staff and View on Demand Webinars is available to all customers in good standing.

ELECTROPHOTOGRAPHICALLY MATCHED COMPONENTS

We provide these critical components that have been electrophotographically matched for use in remanufactured toner cartridges. It is vital that the critical components be replaced as a system to ensure consistent high quality performance. We provide additional components such as felts, foams and recovery blades, should you decide they are necessary. Using Static Control's system of components allows you to use less expensive non-virgin cartridges and create remanufactured cartridges that provide high quality prints virtually indistinguishable from the OEM.

INDUSTRY LEADER

Static Control is the global leader in aftermarket imaging and remanufacturing technology. Offices are located worldwide and all research, development, manufacturing and engineering takes place at their Sanford, North Carolina, USA world headquarters. Currently, Static Control manufactures in-house over 10,000 imaging products and supplies over 14,000 imaging products to the aftermarket industry.



Static Control Components (USA - World Headquarters)
3010 Lee Avenue PO Box 152 Sanford, NC 27331
US/Canada Tel: +1 800-488-2426 • Fax: +1 800-488-2452
Int'l Tel: +1 919-774-3808 • Fax: +1 919-774-1287
Email: info@scc-inc.com

Static Control (Hong Kong) Limited
Unit 2602-03, 26F Tower II, Metroplaza
223 Hing Fong Road, Kwai Fong, Hong Kong
Tel: +852-2427-6011 Fax: +852-2427-6677
Email: info@scchongkong.hk

Static Control Components (Europe) Limited
Unit 30, Worton Grange
Reading, Berkshire RG2 0TG, United Kingdom
Tel: +44 (0) 118-923-8800 Fax: +44 (0) 118-923-8811
Email: info@scceurope.co.uk

Static Control (Johannesburg) Limited
The Warehouse, Unit 1&2 - Corner of Deodar Road &
Constantia Avenue, Pomona 1619 PO Box 7288
Bonaero Park 1622, South Africa
Tel: +27-11-570-2300 Fax: +27-11-973-2130
Email: info@sccafrika.co.za