



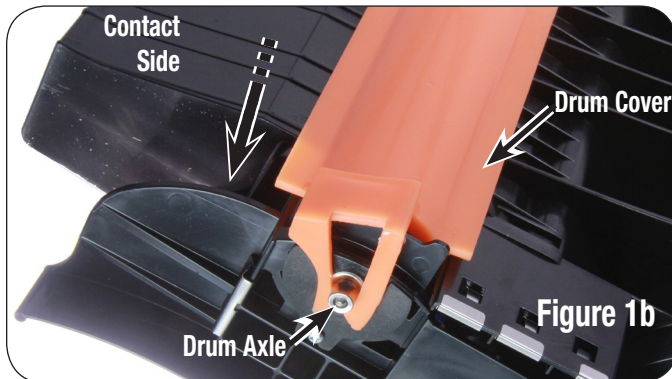
Installation of the Lexmark® T650 Drum Cover

This document is a step-by-step guide for installation of the Lexmark® T650 drum cover (LT650DRCOVER).


1. Position the drum cover so the end with the narrow clip is over the drum axle on the contact side of the cartridge and press down to secure (Figures 1a and 1b).

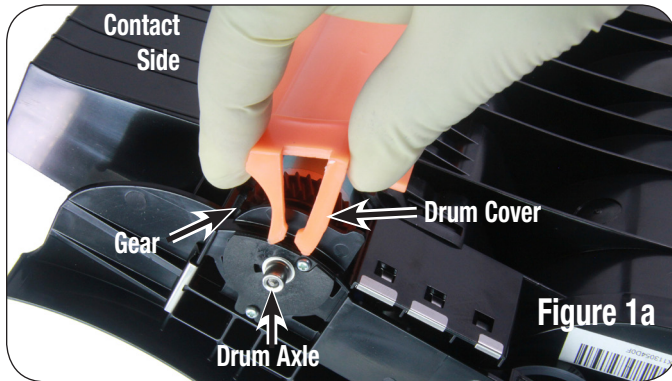


 **Note:** The gear on the OPC drum is located on the contact side of the cartridge.





2. Press down on the opposite end of the drum cover to lock the wide clip onto the drum hub (Figure 2).

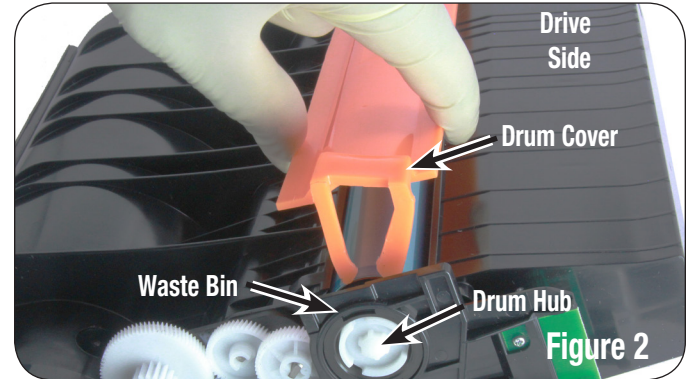

 **Note:** The wide clip end of the drum cover fits over the hub end of the OPC drum and behind the waste bin.

3. Drum cover installed (Figure 3).

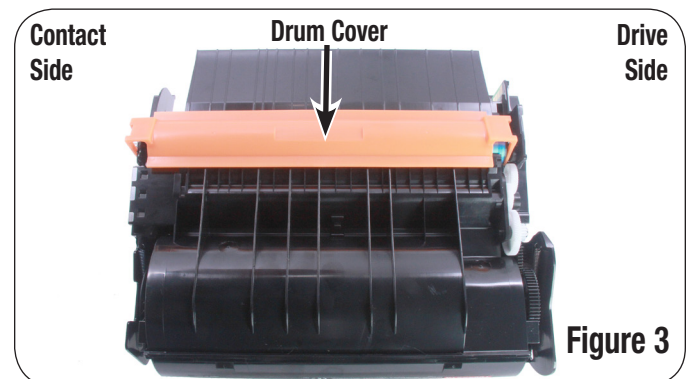

 **Note:** For complete remanufacturing instructions of the Lexmark® T650 refer to SSS™ 1131.

For direct technical support, please call:

US/Canada: 800 488 2426, Int'l +1 919 774 3808 • Europe: + 44 (0) 118 923 8800

China: 800 630 0700 • Hong Kong: +852 2427 6011 • South Africa: +27 (0) 11 973 1930

www.scc-inc.com • www.sceurope.co.uk • www.scc-inc.cn