


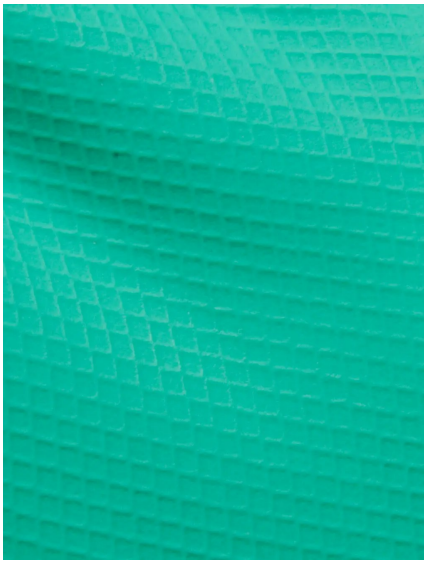

TEGERA® 18601

Learn more

A BARRIER IN WET AND OILY ENVIRONMENTS.

Nitrile glove with a diamond grip pattern for versatile tasks. The 0.38 mm/14,9 mils thin nitrile acts as a barrier. Diamond pattern in the palm for better grip in wet and oily environments. The flocked lining reduces sweat inside the glove. Latex-free for reduced risk of allergies and approved for food handling. 12 pairs/bundle. 144 bundles/carton.

CHARACTERISTICS

- Durable
- Good grip
- Good fit
- Comfortable

FUNCTIONS

- Protection against chemicals
- Approved for handling foodstuffs
- Latex-free
- Pre-curved fingers
- Oil and grease resistant
- Waterproof

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

PREVENTS RISK OF

Risk of infection, Corrosive injuries, Contact with chemicals, Contact with moisture, Contact with damp, Contact with oil and fat

PRIMARY ENVIRONMENTS OF USE

Chemical risk environments, Microbiological risk environments, Environments hazardous to health, Corrosive environments, Wet environments, Moist environments, Oily and greasy environments, Dirty environments

PRIMARY AREAS OF USE

Painting, Agricultural work, Petro-chemical work, Chemical work, Chemical technology work, Laboratory work, Paint spraying work

PRIMARY INDUSTRIES OF USE

Agriculture, Mining, Oil, gas, petrochemical, Pulp and paper, Chemical, Rubber and plastic, Automotive

TYPE OF WORK

Medium weight

CHEMICAL RESISTANCE

According to EN16523-1:2015. For details, please contact Ejendals.

SPECIFICATION

TYPE All-round work gloves, Chemical protection gloves - General Protection
CATEGORY Cat. III
THICKNESS 0,38 mm
LENGTH 330 mm
DEXTERITY 5
INSIDE Flock-lined
GRIP DESIGN Diamond grip pattern
COLOUR Green
PAIRS PER: BUNDLE/CARTON 12/144
DISPLAY TYPE Bulk pack
DIPPING MATERIAL Nitrile

COMPLIANCE

CE 0598

UKCA 0120

EAC

TP TC 019:2011

EN ISO 21420:2020

EN 388:2016+A1:2018 4001X

EN ISO 374-1:2016/Type A JKLNOT

EN ISO 374-5:2016

FEATURES

General Protection

Waterproof

TEST ACCORDING TO EN ISO 374-1:2016

Tested chemical	J	K	L	N	O	T
Permeation level	6	6	2	2	4	6
Degradation %	15,7	8,9	86,1	94,6	34,4	33,9

SIZE		ARTICLE NUMBER	EAN
11	XXL	18601-11	7340118312019

ejendals
Limavägen 28, SE-793 32 Leksand, Sweden
Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.