



4 CCT SELECTABLE

SHATTERPROOF COATED


**BALLAST COMPATIBLE
T12 REPLACEMENT**

SUGGESTED APPLICATIONS


Shop Light Fixtures
Laundry Rooms
Utility Closets
Garages

LED T12 LAMPS

DIRECT REPLACEMENT | BALLAST COMPATIBLE

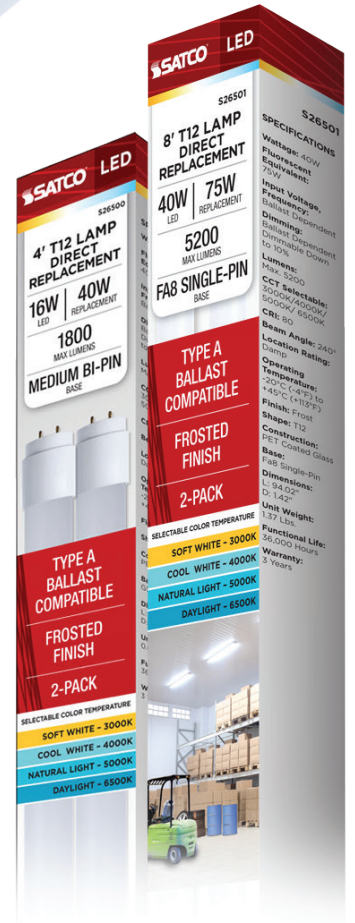

ColorQuick®
Selectable Color Technology



SATCO|NUVO's LED T12 ballast compatible lamps are direct replacements for T12 linear fluorescent. Offered in a frosted white finish, these lamps are also PET coated and NSF rated. The 4' model comes with a medium bi-pin base, and the 8' model comes with a Fa8 single-pin base. Conveniently sold in two-packs, these lamps make replacing traditional tubes an easy choice.



GENERAL SPECIFICATIONS

Input Voltage: Ballast Dependent

Frequency: 50/60Hz

Type A: Ballast Compatible

Efficacy: Up to 130 LPW

CRI: 80+

CCT Selectable: 3000K/4000K/5000K/6500K

Location Rating: Damp

Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)

Rated for Enclosed Fixtures: No

Wiring: Double-Ended

Construction: PET Coated Glass




ITEM SPECIFICATIONS / ORDER INFO

Item	Size	Base	Lumens	Wattage	Fluorescent Replacement Wattage	Input Current @120V/277V	Beam Angle	Functional Life	Warranty	Pack QTY
S26500	4'	G13	1700/1700/1800/1800	16W	40W	0.13-0.06A	240°	50,000 Hours	5 Years	2
S26501	8'	Fa8	4400/5200/5200/4800	40W	75W	0.13-0.14A	240°	36,000 Hours	3 Years	2

DIMENSIONS / WEIGHTS


Item	MOL (A)	MOD (B)	Weight
S26500	47.74"	1.42"	0.67 Lbs
S26501	94.02"	1.42"	1.37 Lbs

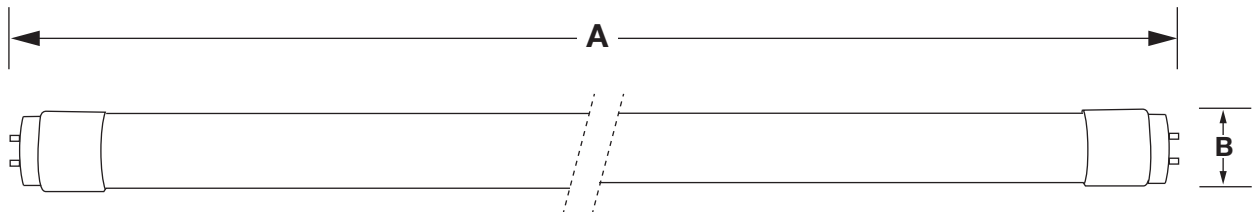

CCT Selectable Switches



S26500



S26501

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN ICES-005 (A) Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

For ballast compatibility visit satco.com.

Visit satco.com/service/warranty for complete warranty details.