## **SATCO NUVO**





**CCT SELECTABLE** 

**TYPE B BALLAST BYPASS** 

GX32d-2 AND GX32d-3 MODELS

> RANGE VOLTAGE 120V-277V

**SUGGESTED APPLICATIONS** 

RETAIL HOSPITALITY OFFICE BUILDINGS SCHOOLS

# **CFL REPLACEMENT LAMPS**

CCT SELECTABLE | UNIVERSAL OPERATION



Upgrade outdated CFLs with SATCO|NUVO's Type B ballast bypass LED replacement lamps—designed for direct-wire installation, eliminating the need for a ballast and reducing maintenance costs. These PL-shaped lamps provide uniform illumination with a wide 320-degree beam angle, while their durable aluminum and plastic construction with a frosted lens ensures smooth, omnidirectional lighting. Available in two wattages, the 14W model replaces a traditional 22W CFL, while the 18W model replaces a 28W CFL. Both lamps are CCT selectable, allowing users to choose between warm 2700K, neutral 4000K, or crisp 5000K light to suit various applications. Engineered with a damp location rating and available with GX32d-2 and GX32d-3 bases, these energy-efficient lamps offer a simple, long-lasting upgrade for commercial and residential applications.











# **CFL REPLACEMENT LAMPS**

## CCT SELECTABLE | UNIVERSAL OPERATION

#### **GENERAL SPECIFICATIONS**

Range Voltage: 120V-277V

Frequency: 60Hz Power Factor: >0.9

**THD: <20%** 

Dimming: Non-Dimmable **Surge Protection Rating:** 0.5kV **Ballast:** Type B - Ballast Bypass

Efficacy: Up to 100 LPW

CRI: 80+

**CCT Selectable:** 2700K/4000K/5000K

Location Rating: Damp

Ambient Operating Temperature:  $-20^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$ ) to  $+40^{\circ}\text{C}$  ( $+104^{\circ}\text{F}$ )

Rated for Enclosed Fixture: No **Operating Position:** Universal

Beam Angle: 320° Lamp Shape: PL

Material: Aluminum/Plastic

Lens Finish: Frost

Functioning Life: 15,000 Hours

Warranty: 3 Years










## **ITEM SPECIFICATIONS / ORDER INFO**

Item	Watts	Replacement Wattage	Lumens	сст	Lamp Base	Input Current
S11545	14W	22W	1400	2700K/4000K/5000K	GX32d-2	0.12-0.05A
S11546	18W	28W	1800	2700K/4000K/5000K	GX32d-3	0.15-0.07A

#### **DIMENSIONS / WEIGHTS**

Item	MOL (A)	MOD (B)	Weight
S11545	6.30"	1.93"	0.30 Lbs.
S11546	6.89"	1.93"	0.32 Lbs.

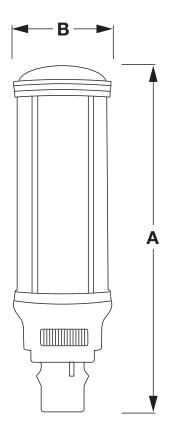

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN ICES-005 (A) Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Replacement wattage shown depends on application and fixture.