




This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

**CONTENTS**

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
<b>Specification Guide</b> Gas on Glass Cooktop	<b>4</b>	<b>Data Sheet</b> Gas on Glass Cooktop	<b>7</b>		

## SPECIFICATION GUIDE

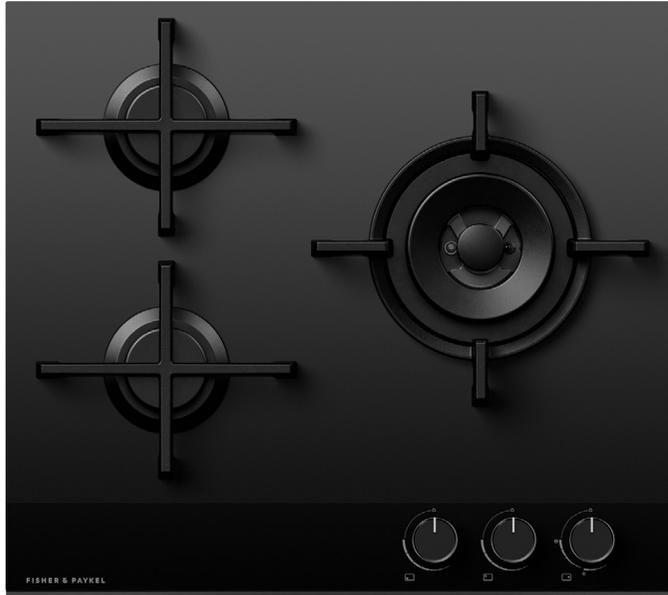

### OVERVIEW

The 60cm Gas on Glass Cooktop elegantly combines functionality and style with its black trim and ceramic glass cook zones. It features a dual flame wok burner with precise heat control, all in our sleek Minimal style, perfect for modern kitchens.

### PRODUCTS

#### CG603DTGGB4

Gas on glass cooktop, 60cm, Town Gas

#### CG603DLPGB4

Gas on Glass Cooktop, 60cm, LPG

### SERIES & STYLE

Series 9

Minimal


### FEATURES

- ① Features three burners, including a dual flame wok burner and two semi-rapid burners
- ② Minimal style with elegant black trim and black ceramic glass cook zones
- ③ Available in both LPG and Town Gas models, offering versatility
- ④ The wok burner provides flexibility from high flame to low simmer
- ⑤ Flame-failure safety device automatically turns off the gas if the flame goes out
- ⑥ Easy to clean with removable trivets and wipeable ceramic glass
- ⑦ Responsive dials for precise heat control, ideal for both slow simmering and intense searing
- ⑧ Designed for precise control, ensuring consistent flame and heat distribution
- ⑨ Glass edges are chip-tested, resistant to damage from pots and pans for lasting quality

**SPECIFICATIONS**

<b>Model No.</b>	CG603DTGGB4, Town Gas CG603DLPGB4, LPG
<b>Dimensions</b>	<b>H</b> 124mm <b>W</b> 600mm <b>D</b> 530mm
<b>Weight</b>	
<b>Packaged</b>	18kg
<b>Town Gas</b>	
Supply	0.8kPa
Inlet	Elbow 1/2 inch BSP external thread and Regulator
<b>LPG</b>	
Supply	2.9kPa
Inlet	Elbow 1/2 inch BSP external thread
<b>Electrical</b>	
Supply	220-240 V, 50 Hz
Service	10 A
Connection	Power Cord with Plug


**PRODUCT DIMENSIONS**

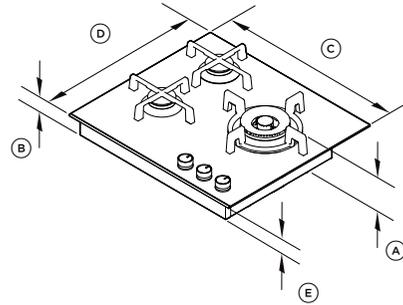

ISO VIEW

	mm
(A) Overall height	124
(B) Height excluding trivets and burners	63
(C) Overall width	600
(D) Overall depth	530
(E) Height of chassis	58

**CAVITY DIMENSIONS: STANDARD INSTALLATION**

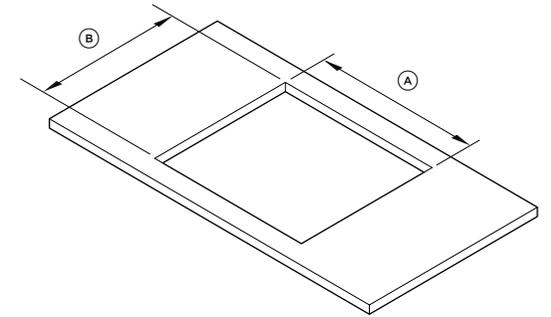


ISO VIEW


	mm
(A) Overall width of cutout	560
(B) Overall depth of cutout	490

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](http://fisherpaykel.com)

## DATA SHEET

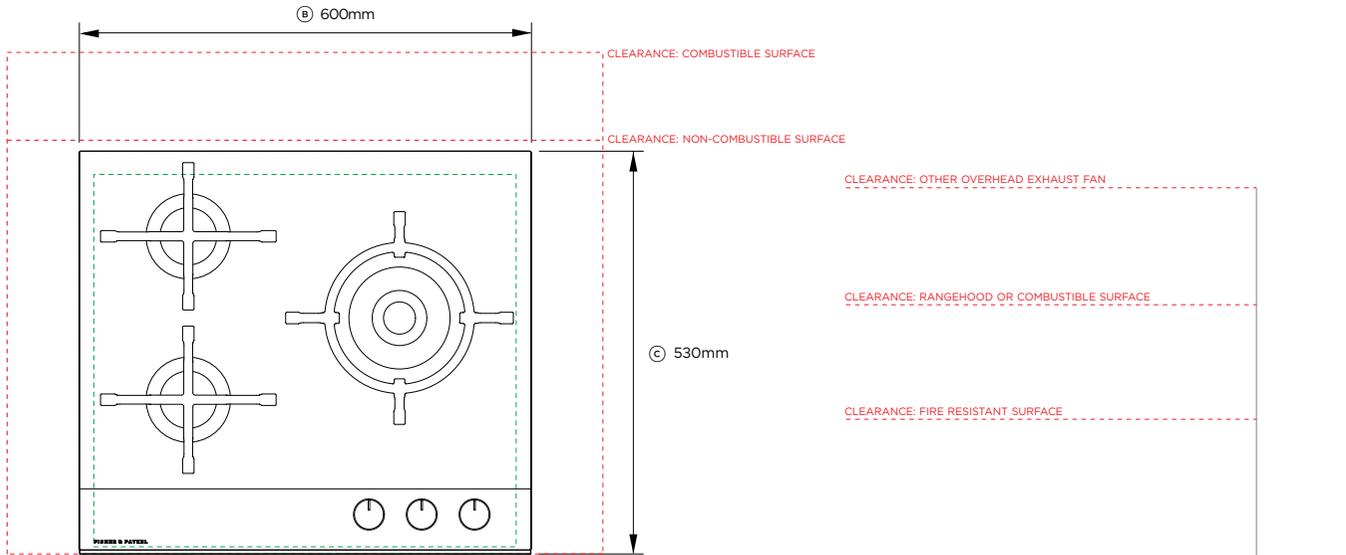

PLAN VIEW

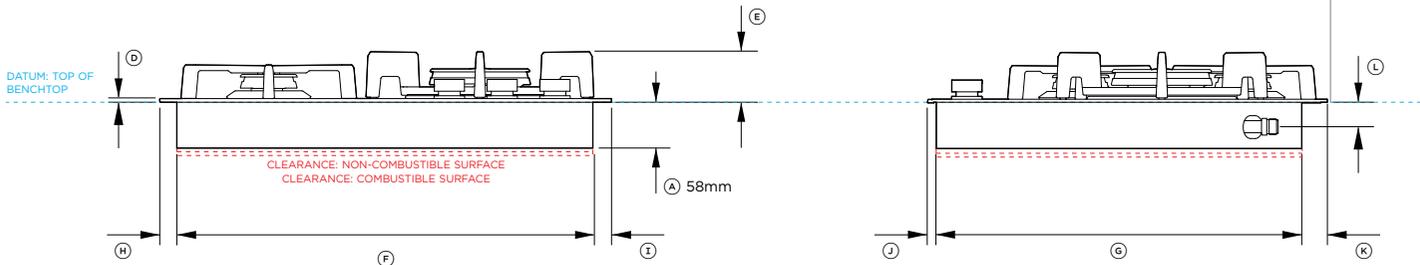

FRONT VIEW

PROFILE VIEW



**Model no:**

Gas on Glass Cooktop, 60cm - CG603DTGGB4, CG603DLPGB4

Product Dimensions		mm
(A)	Height of chassis (below top of bench)	58
(B)	Overall width of cooktop	600
(C)	Overall depth of cooktop	530
(D)	Height from benchtop datum to top of cooktop glass	5
(E)	Height above countertop to top of grates	61
(F)	Width of chassis	554
(G)	Depth of chassis	485
(H)	Distance from left side of cooktop to chassis	23
(I)	Distance from right side of cooktop to chassis	23
(J)	Distance from front edge of cooktop to chassis	11
(K)	Distance from back edge of cooktop to chassis	34
(L)	Distance from top of bench to centre of gas inlet on product	33

Cavity Dimensions: Standard Installation		mm
Min clearance from left edge of cutout to nearest combustible surface		115
Min clearance from right edge of cutout to nearest combustible surface		115
Min clearance from rear edge of cutout to nearest combustible surface		160
Min clearance from rear edge of cutout to nearest non-combustible surface		45
Min clearance below top of benchtop to combustible surface		70
Min clearance below top of benchtop to Fisher & Paykel oven or nearest non-combustible surface		65
Min clearance from glass surface to downwards-facing tiled or fire resistant surface		500
Min clearance from glass surface to rangehood or downward facing combustible surface		650
Min clearance from glass surface to any other overhead exhaust fan		800

Cutout Dimensions		mm
Overall width of cutout		560
Overall depth of cutout		490

IMPORTANT NOTE: For full installation please refer to our installation manual

INDICATES CABINetry / PRODUCT DATUM -----  
 INDICATES CABINetry CLEARANCES - - - - -  
 INDICATES CUTOUT - - - - -

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](http://fisherpaykel.com)

