
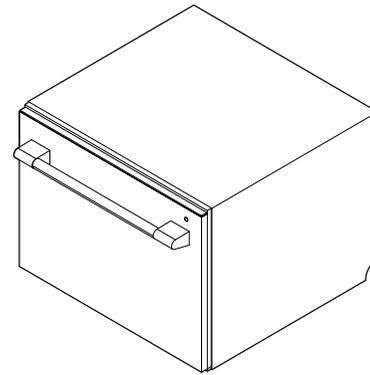


# FISHER & PAYKEL

## DATA SHEET 24" SINGLE DISHDRAWER™ DISHWASHER

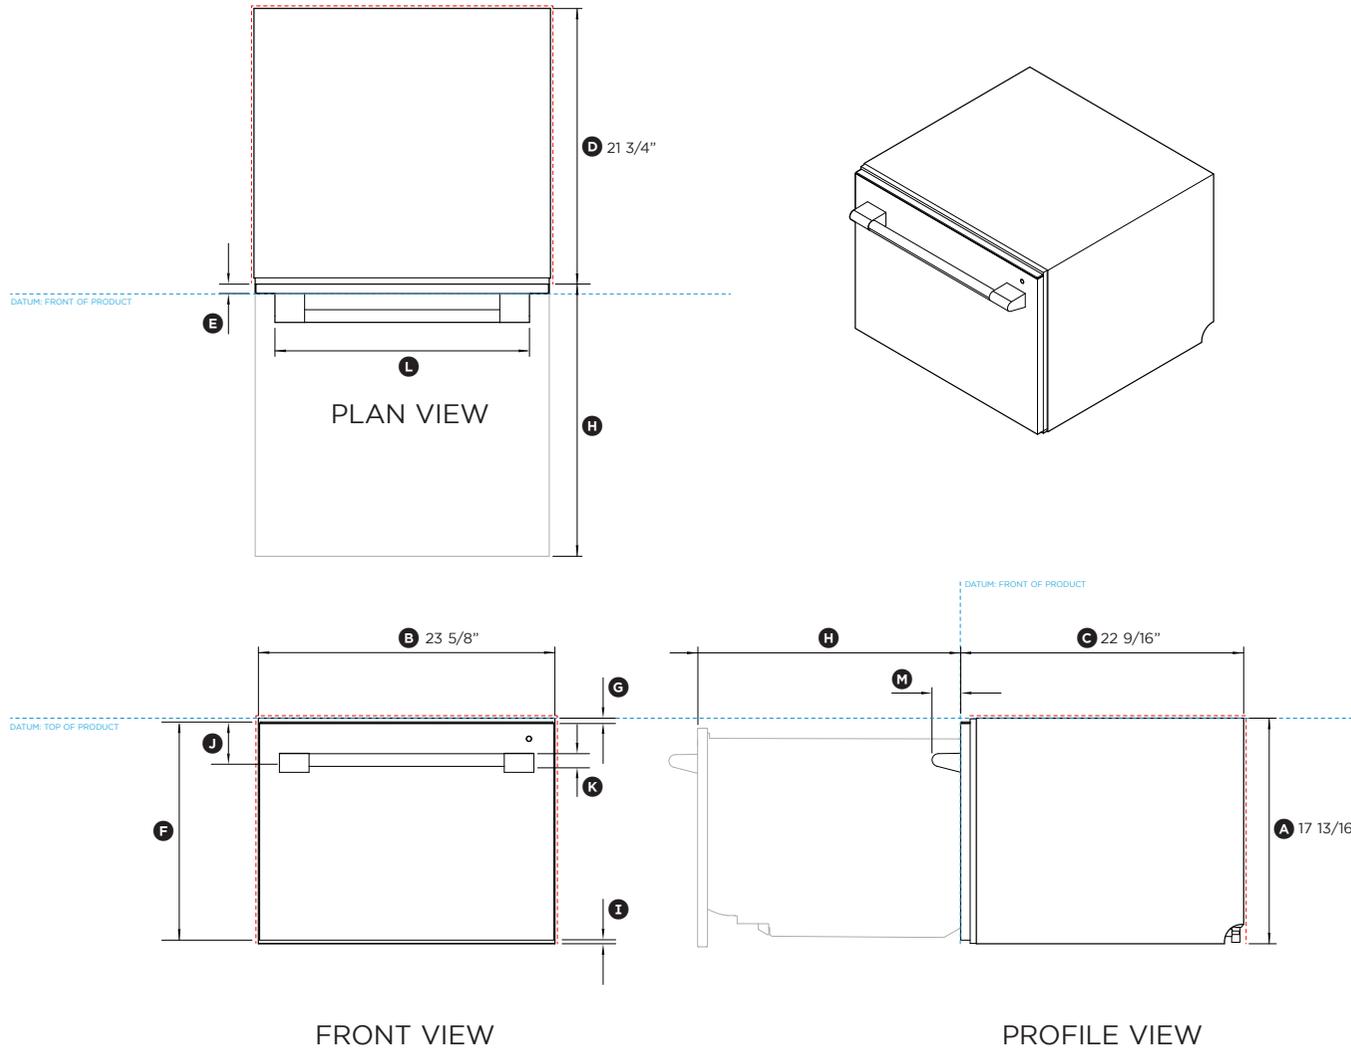

Model no:

**DD24STX6PX1**

(refer page 2 for metric measurements)

Product Dimensions	In
Ⓐ Overall height of product	17 13/16"
Ⓑ Overall width of product	23 5/8"
Ⓒ Overall depth of product (excl. handle)	22 9/16"
Ⓓ Depth of chassis	21 3/4"
Ⓔ Depth of drawer front panel	13/16"
Ⓕ Height of drawer front panels	17 3/8"
Ⓖ Height from top of drawer front panel to top of chassis	1/8"
Ⓗ Maximum extension of drawer	21 9/16"
Ⓘ Ventilation gap below drawer front panel	1/4"
Ⓚ Height from top drawer panel to centre of handle rail	3 3/16"
Ⓛ Handle thickness (not including standoffs)	1"
Ⓜ Handle width (including standoffs)	20 1/4"
Ⓝ Handle depth measured from front of drawer	2 1/4"

Minimum Clearances	In
Minimum inside height of cavity	17 15/16"
Minimum inside width of cavity	23 5/8"
Minimum overall depth of cavity*	22 3/4"
Minimum clearance to adjacent cupboard door	1/16"
Minimum clearance to corner cupboard	1/2"

\*including 11/16" (18mm) door panels on adjacent cabinetry

Electrical requirements	110-120 VAC max. 15 A
<b>Water pressure</b>	
Water softener models	max. 1 MPa (145 psi), min. 0.1 MPa (14.5 psi)
Non-water softener models	max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi)

PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----




DATE: 31.03.2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)



# FISHER & PAYKEL

## DATA SHEET 24" SINGLE DISHDRAWER™ DISHWASHER

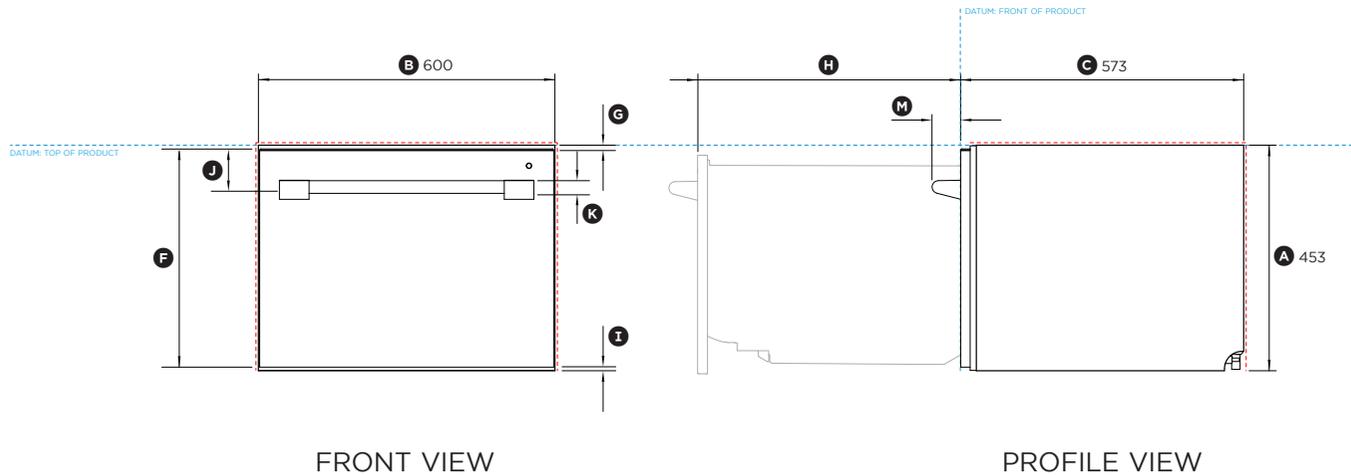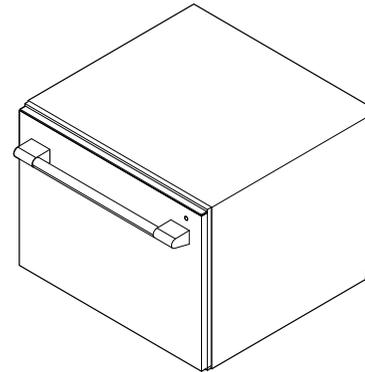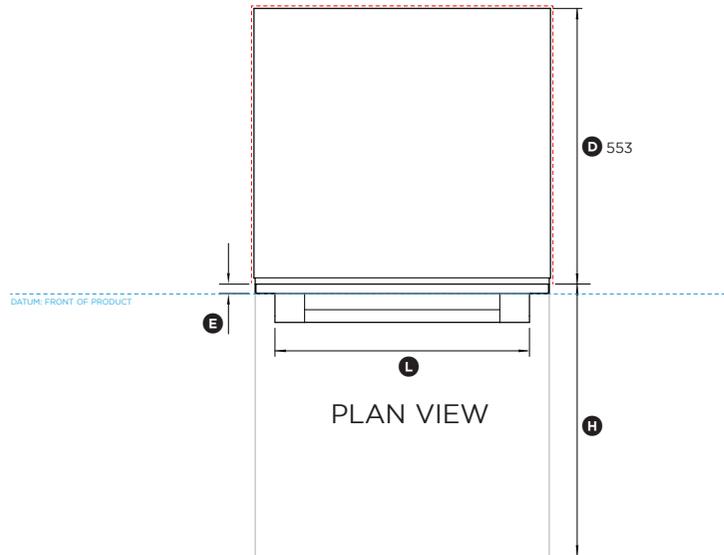

Model no:

**DD24STX6PX1**

(refer page 1 for imperial measurements)

Product Dimensions	mm
Ⓐ Overall height of product	453
Ⓑ Overall width of product	600
Ⓒ Overall depth of product (excl. handle)	573
Ⓓ Depth of chassis	553
Ⓔ Depth of drawer front panel	20
Ⓕ Height of drawer front panels	442
Ⓖ Height from top of drawer front panel to top of chassis	3
Ⓗ Maximum extension of drawer	547
Ⓘ Ventilation gap below drawer front panel	7
Ⓚ Height from top drawer panel to centre of handle rail	81
Ⓛ Handle thickness (not including standoffs)	25
Ⓜ Handle width (including standoffs)	515
Ⓝ Handle depth measured from front of drawer	58

Minimum Clearances	mm
Minimum inside height of cavity	456
Minimum inside width of cavity	600
Minimum overall depth of cavity*	578
Minimum clearance to adjacent cupboard door	2
Minimum clearance to corner cupboard	13

\*including 11/16" (18mm) door panels on adjacent cabinetry

<b>Electrical requirements</b>	110-120 VAC max. 15 A
<b>Water pressure</b>	
Water softener models	max. 1 MPa (145 psi), min. 0.1 MPa (14.5 psi)
Non-water softener models	max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi)

PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES - - - - -

DATE: 31.03.2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

