

PLANNING GUIDE

PLANNING GUIDE
INTEGRATED REFRIGERATOR FREEZER
76.2CM, ICE & WATER

RS7621WL & RS7621WR

—
17/1/2022

FISHER & PAYKEL

CONTENTS

**76.2cm Integrated Refrigerator Freezer
with Stainless Steel Door panels**

Model Nos:

Right Hinge Fridge/Freezer RS7621WRUK1
Stainless Steel Door Panel set RD7621WRD
Handle kit (Square Handle) AHD3R7621W
Stainless Steel Toe kick Panel AKRS7621

Left Hinge Fridge/Freezer RS7621WLUK1
Stainless Steel Door Panel set RD7621WLD
Handle kit (Square Handle) AHD3R7621W
Stainless Steel Toe kick Panel AKRS7621

	page
Purchase Decision	3
Product & Cavity Dimensions	4
Door Opening & Clearance Dimensions	5
Hinge Range of Movement	8
Cavity Preparation (Frameless and Framed)	11-12
Max Distance of Hose & Cord	13
Dual Installation	16
Handle Data Sheets	17-20

**76.2cm Integrated Refrigerator Freezer
with Custom Door panels**

Model Nos:

Right Hinge Fridge/Freezer RS7621WRUK1

Left Hinge Fridge/Freezer RS7621WLUK1

	page
Purchase Decision	3
Product & Cavity Dimensions	6
Door Opening & Clearance Dimensions	7
Hinge Range of Movement	8
Custom Panel Dimensions	9
Custom Panel Preparation	10
Cavity Preparation (Frameless and Framed)	11-12
Max Distance of Hose & Cord	13
Dual Installations	14-15
Handle Data Sheets	17-20

Note: This guide shows specifications for right hinge models.
For left hinge models, door related specifications are mirrored.

PURCHASE DECISION
61cm Integrated Refrigerator Freezer & 76.2cm Integrated Refrigerator Freezer

1

CABINET WIDTH

HINGE SIDE

INTERIOR FINISH

2


PANEL STYLE

3


HANDLE OPTION

4


TOE KICK STYLE




610mm




Right side hinge opening




Aluminium interior




760mm




Left side hinge opening

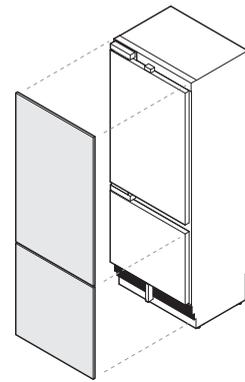


Stainless steel door panels

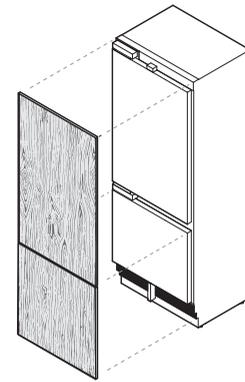

Stainless steel interior

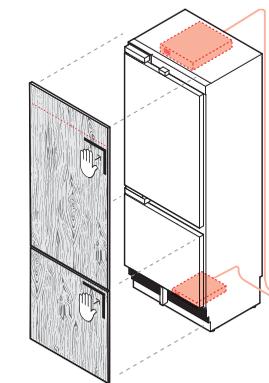

Custom manufactured door panels*
with Assisted Opening accessory
(available soon)

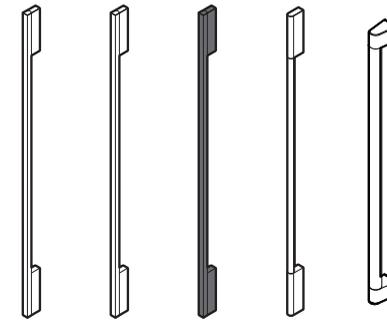

Contemporary


Professional




Custom*



Handle free

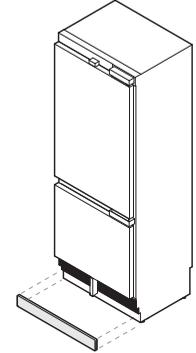

Stainless steel toe kick

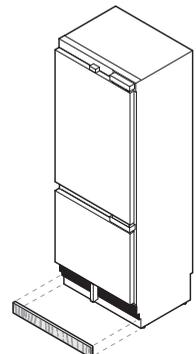

Custom manufactured
toe kick panels*

PRODUCT WIDTH		
	Right Hinge	Left Hinge
610mm	RS6121WRUK1	RS6121WLUK1
760mm	RS7621WRUK1	RS7621WLUK1

STAINLESS STEEL DOOR PANELS	
610mm	
Right Hinge	RDW6121WRD
Left Hinge	RDW6121WLD
760mm	
Right Hinge	RDW7621WRD
Left Hinge	RDW7621WLD
ASSISTED OPENING	
OPINIEXIRSW (available soon)	

HANDLE KITS		
	610mm	760mm
CONTEMPORARY		
Square Handle	AHD3RD6121W	AHD3RD7621W
Square Fine Aluminium	AHD5RD6121W	AHD5RD7621W
Square Fine Black	AHD5RD6121WB	AHD5RD7621WB
Round	AHSRD6121W	AHSRD7621W
PROFESSIONAL		
Round Flush	AHP3RD6121W	AHP3RD7621W

STAINLESS TOE KICKS	
610mm	AKRS6121
760mm	AKRS7621
DUAL INSTALL STAINLESS TOE KICKS	
610mm + 610mm	AKRS12210
610mm + 760mm	AKRS13710
760mm + 760mm	AKRS15210
JOINER KIT	
AJ-RS21LR	

*Note: Custom door panels, handles or toe kick panel to be manufactured and fitted by cabinetmaker

FISHER & PAYKEL

PRODUCT & CAVITY DIMENSIONS


76.2cm Integrated Refrigerator Freezer with Stainless Steel Door panels

Model nos:

Right Hinge Fridge/Freezer RS7621WRUK1
 Stainless Steel Door Panel set RS7621WR
 Handle kit (Square Handle) AHD3RD7621W
 Stainless Steel Toe kick Panel AKRS7621

NOTE: Left hand hinge model is a mirrored version of image shown.

Left Hinge Fridge/Freezer RS7621WLUK1
 Stainless Steel Door Panel set RS7621WL
 Handle kit (Square Handle) AHD3RD7621W
 Stainless Steel Toe kick Panel AKRS7621

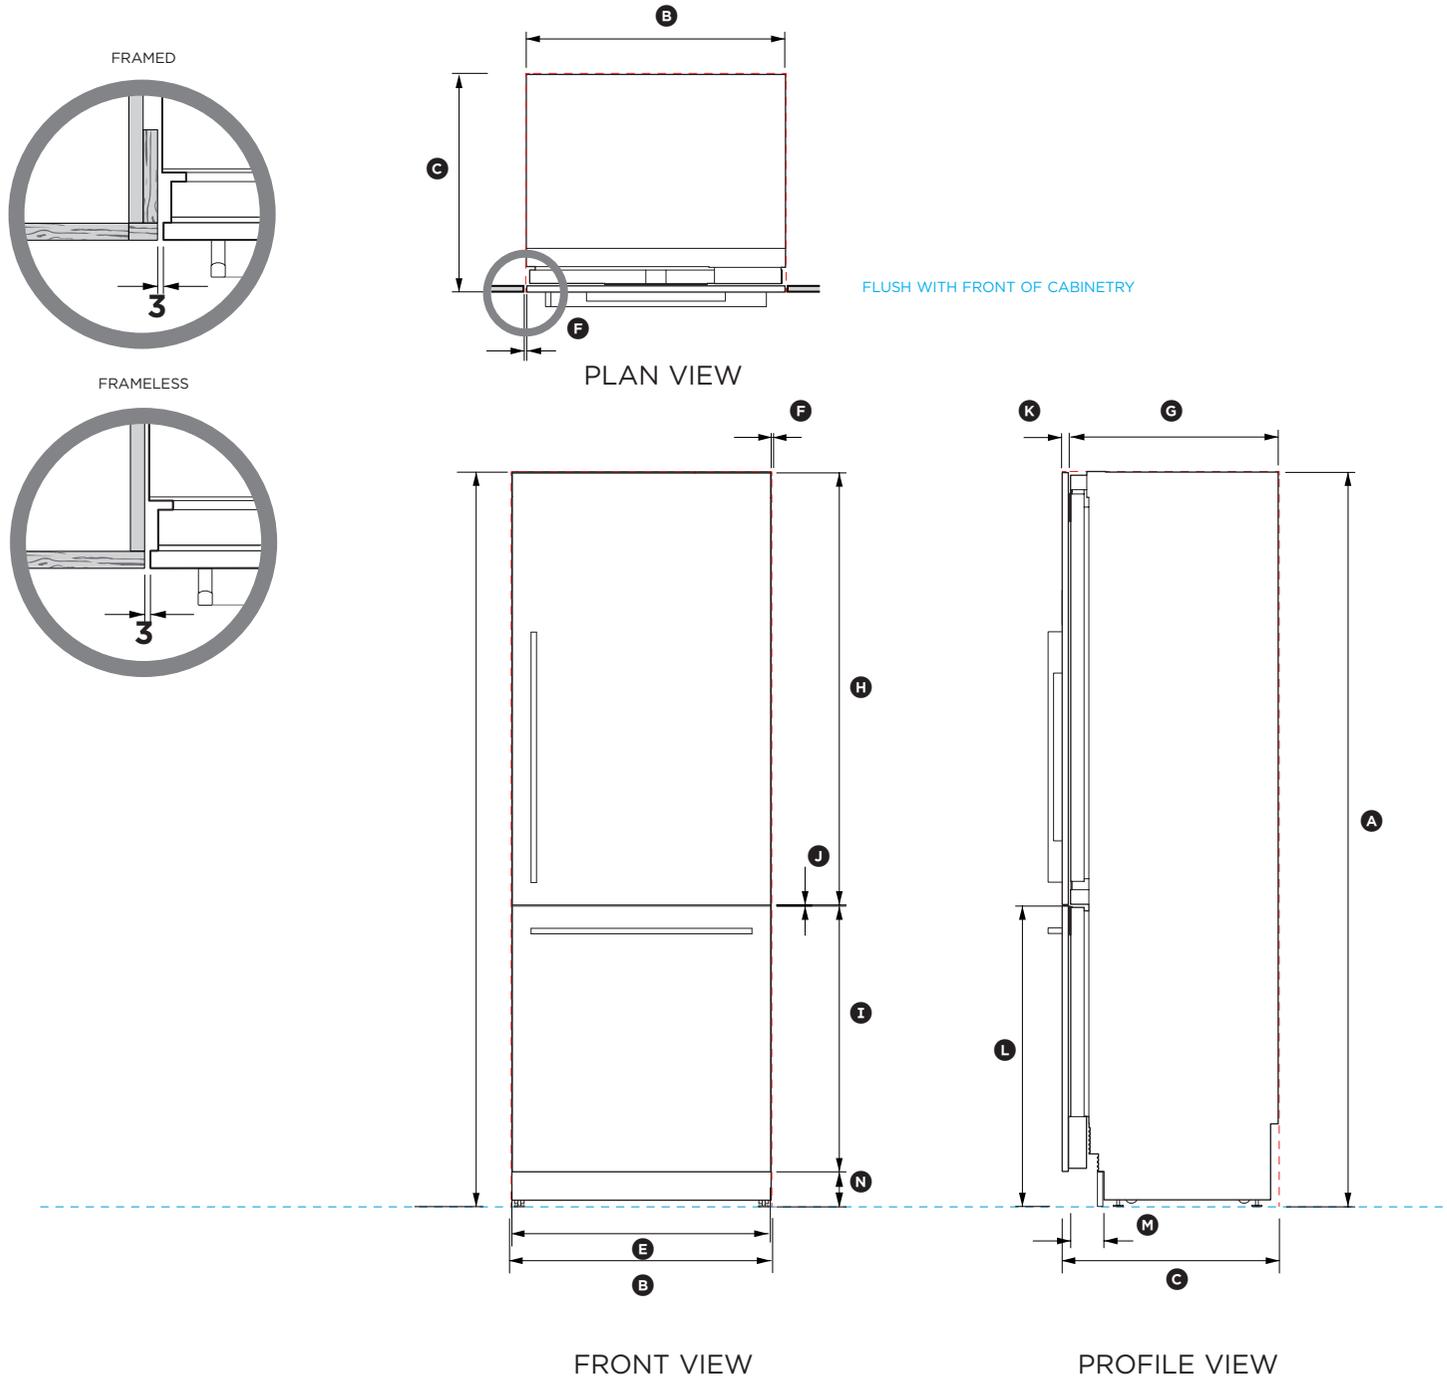

Cavity Dimensions

	mm
Ⓐ Overall height of cavity	2134
Ⓑ Overall width of cavity	762
Ⓒ Minimum overall depth (shallow) of cavity when services are located outside of cavity	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity	650

Product Dimensions

	mm
Ⓓ Overall height of product	2134
Ⓔ Overall width of product	756
Ⓕ Minimum cabinetry gap clearance from edge of door panel	3
Ⓖ Overall depth of product (excl. door front panel)	610
Ⓗ Height of top door panel	1254
Ⓙ Height of bottom door drawer	772
Ⓚ Gap between top door and bottom drawer panel	3
Ⓛ Depth of doorpanel	19
Ⓛ Height from bottom of product to top of drawer panel	102
Ⓜ Depth of toe kick (excl. door front and toe kick panels)	73 - 102
Ⓝ Height of toe kick*	102

*Standard toe kick height is 102mm with the optional stainless door panel.

INDICATES CAVITY CLEARANCES

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

DOOR OPENING CLEARANCE DIMENSIONS 76.2cm Integrated Refrigerator Freezer

Model nos:
 Right Hinge Fridge/Freezer RS7621WRU1
 Stainless Steel Door Panel set RS7621WR
 Handle kit (Square Handle) AHD3RD7621W
 Stainless Steel Toe kick Panel AKRS7621


NOTE: Left hand hinge model is a mirrored version of image shown.

Left Hinge Fridge/Freezer RS7621WLU1
 Stainless Steel Door Panel set RS7621WL
 Handle kit (Square Handle) AHD3RD7621W
 Stainless Steel Toe kick Panel AKRS7621

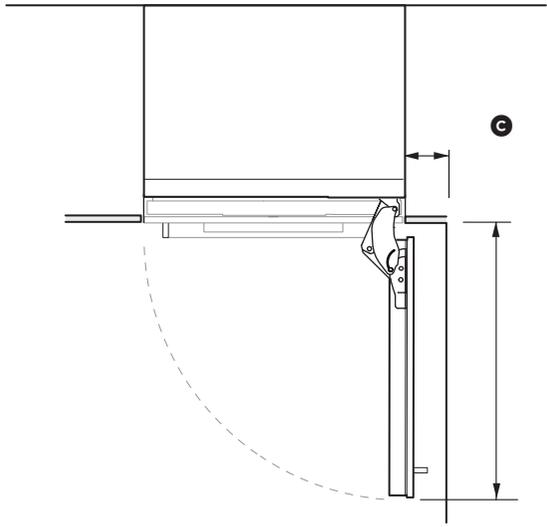


WALL

90° DOOR OPENING

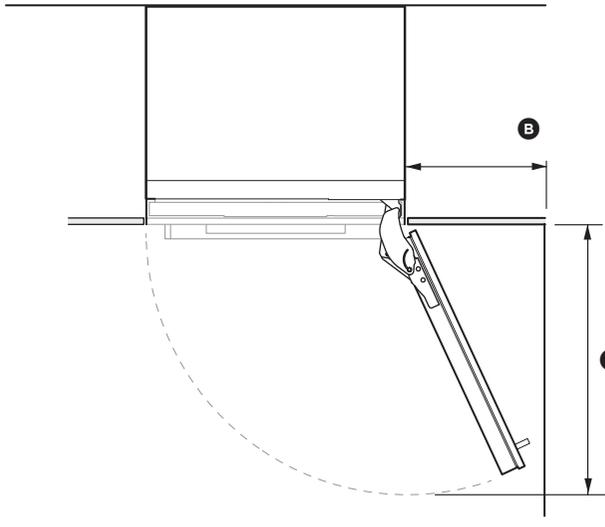

WALL

115° DOOR OPENING
[FULL ROTATION]

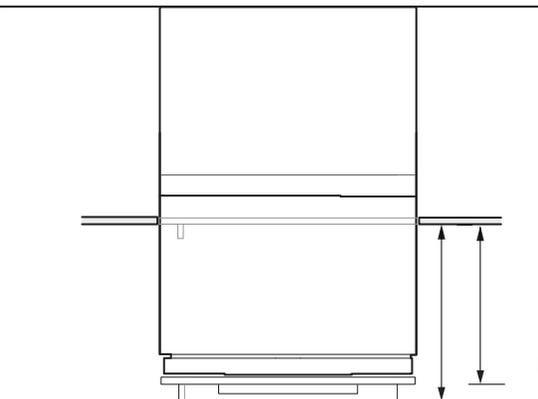

DRAWER OPENING

Door Opening & Clearance Dimensions	mm
Ⓐ Depth of door (90° open) measured from front of door	813
Ⓑ Minimum door clearance to adjacent wall* (115° - full internal access)	419
Ⓒ Minimum door clearance to adjacent wall* (90° - reduced internal access)	110

* Measured from front cabinetry edge.

Drawer Opening & Clearance Dimensions	mm
Ⓓ Depth of drawer (open) measured from front of drawer, excluding handle	420
Ⓔ Depth of drawer (open) measured from front of drawer, including handle	461

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com






FISHER & PAYKEL

PRODUCT & CAVITY DIMENSIONS 76.2cm Integrated Refrigerator Freezer

Model nos:

RS7621WRU1

NOTE: Left hand hinge model is a mirrored version of image shown.
RS7621WLU1

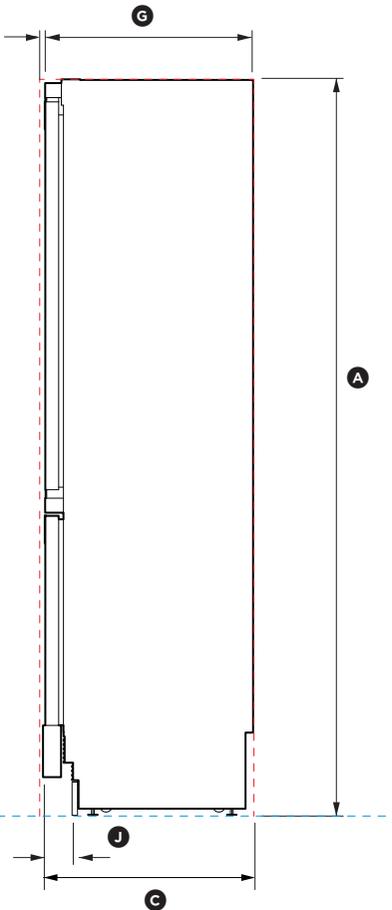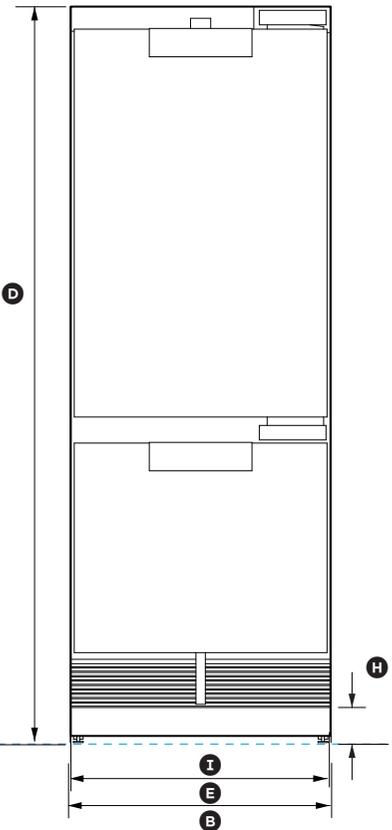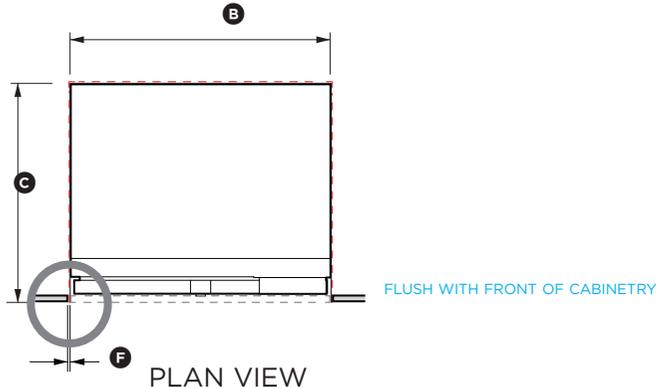

Cavity Dimensions		mm
Ⓐ	Overall height of cavity	2134
Ⓑ	Overall width of cavity	762
Ⓒ	Minimum overall depth (shallow) of cavity when services are located outside of cavity*	635
	Minimum overall depth (deep) of cavity when services are located at rear of cavity*	650

* Assumes a door panel thickness of 19mm.

Total front panel width with required gaps at sides = 762mm
(Refer custom panel dimensions - panel width + 2 x Ⓕ cabinetry gaps).

Product Dimensions		mm
Ⓓ	Overall height of product	2134
Ⓔ	Overall width of product	756
Ⓕ	Minimum cabinetry gap clearance from edge of custom panels**	3
Ⓖ	Overall depth of product (excl. door front panel)	610
Ⓜ	Height of toekick**	50 - 152
Ⓨ	Width of toekick**	759
Ⓩ	Depth of toekick** (excl. door front and toekick panels)	68 - 101

** For custom panel dimensions refer to page 9.

Door panel and custom toekick panel to be manufactured and fitted by cabinetmaker. Door panel thickness min 16mm - max 25mm

INDICATES CAVITY CLEARANCES - - - - -

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

DOOR OPENING CLEARANCE DIMENSIONS 76.2cm Integrated Refrigerator Freezer


Model nos:

RS7621WRU1

NOTE: Left hand hinge model is a mirrored version of image shown.
RS7621WLU1

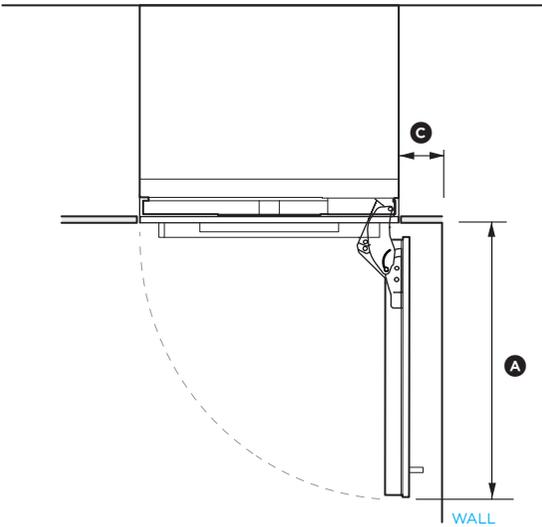

90° DOOR OPENING

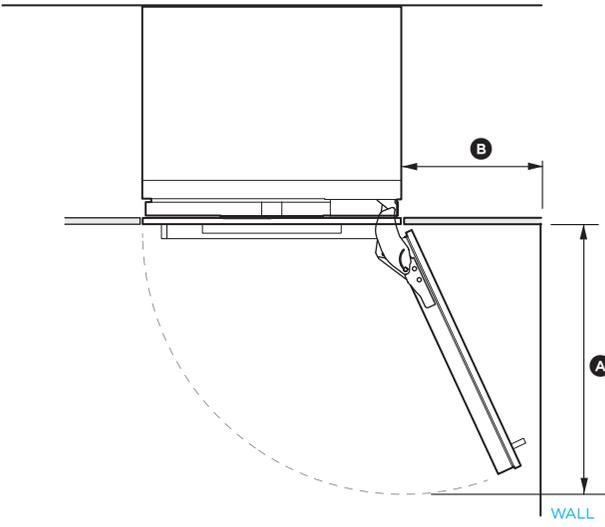


115° DOOR OPENING
[FULL ROTATION]

Door Opening & Clearance Dimensions	mm
Ⓐ Depth of door (90° open) measured from front of door	813
Ⓑ Minimum door clearance** to adjacent wall* (115° - full internal access)	419
Ⓒ Minimum door clearance** to adjacent wall* (90° - reduced internal access)*	110

Drawer Opening & Clearance Dimensions	mm
Ⓓ Depth of drawer (open) measured from front of drawer *	400

* Does not include the custom door panels or handles to be manufactured and fitted by cabinetmaker.

** Measured from front cabinetry edge.

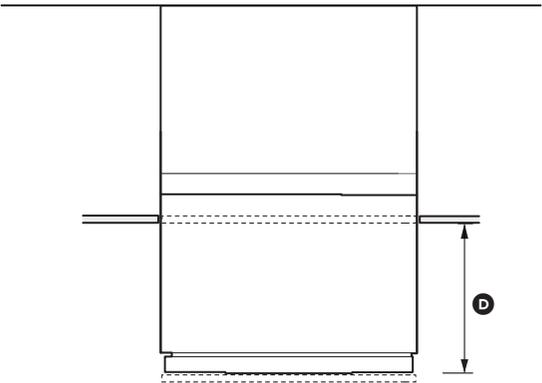

DRAWER OPENING

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

CUSTOM PANEL PREPERATION - HINGE 76.2cm Integrated Refrigerator Freezer

Model nos:


RS7621WRU1

NOTE: Left hand hinge model is a mirrored version of image shown.
RS7621WLU1

Dwg & Dxf Files

Dwg and Dxf files of the panel preparation are available under the resource information for this product which can be found on <https://www.fisherpaykel.com>

Door Hinge - Hettich K05

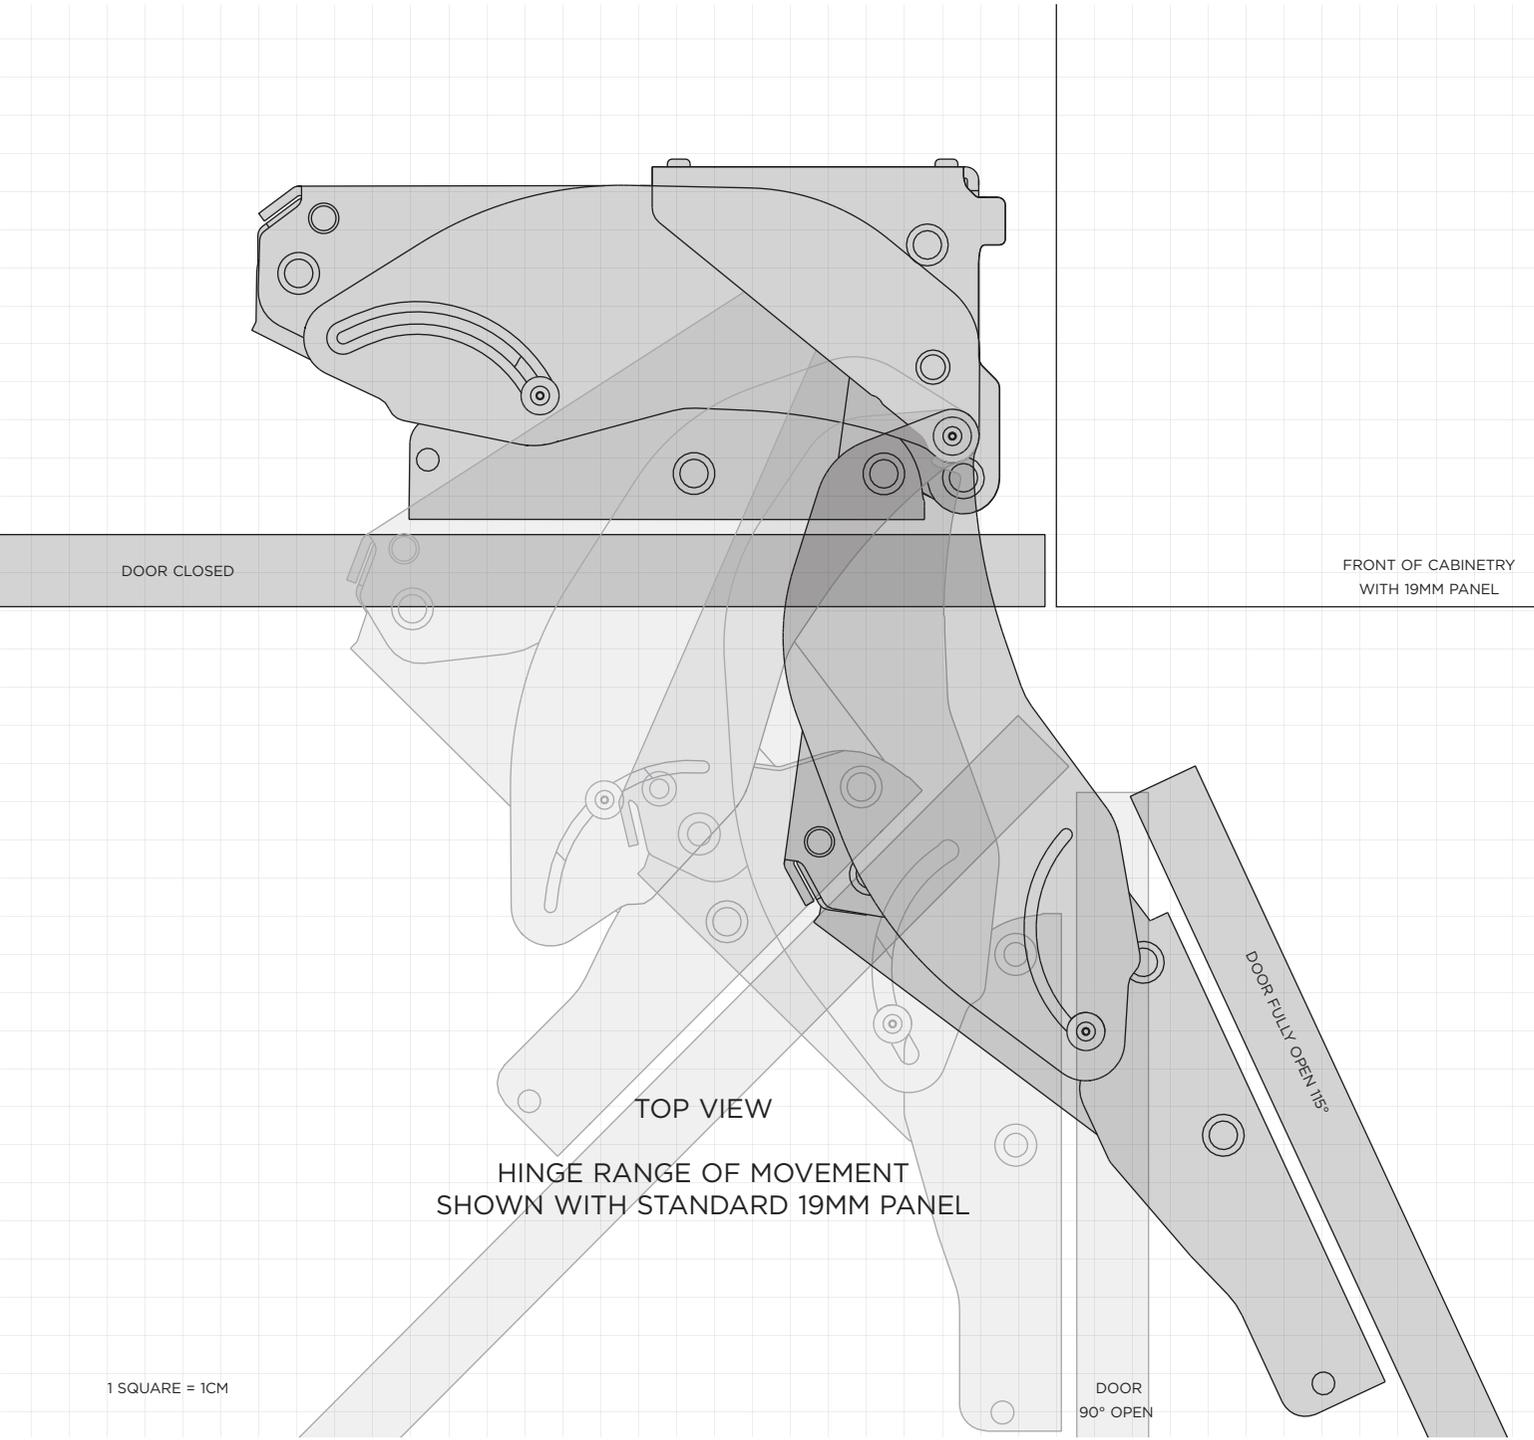


DATE: 17/1/2022


IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://www.fisherpaykel.com)

FISHER & PAYKEL

Custom Panel DIMENSIONS 76.2cm Integrated Refrigerator Freezer

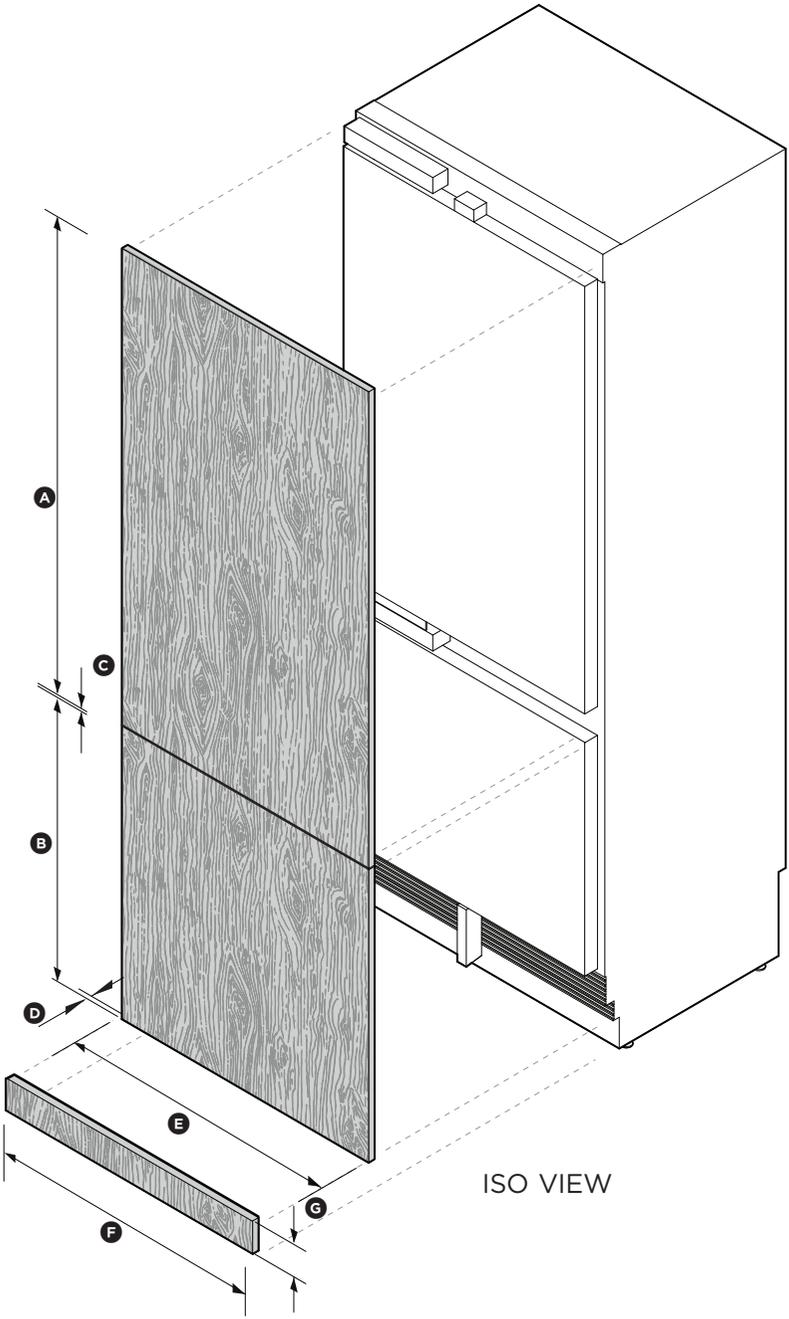

ISO VIEW

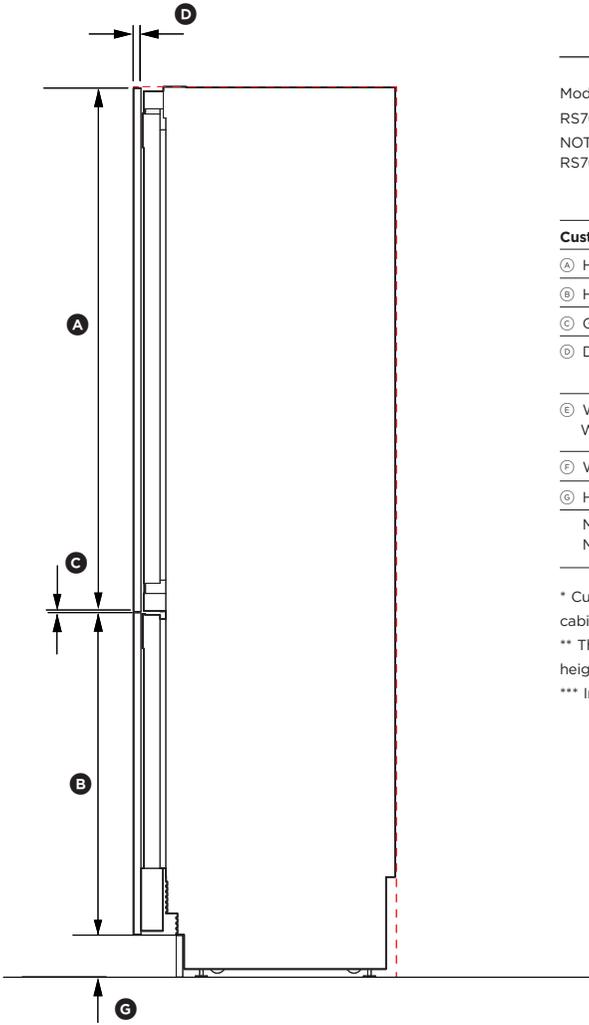

SIDE VIEW

Model nos:
RS7621WRU1
NOTE: Left hand hinge model is a mirrored version of image shown.
RS7621WLU1

Custom Panel Dimensions*	mm
Ⓐ Height of top door panel	1254
Ⓑ Height of bottom drawer panel	721 - 822
Ⓒ Gap between door and drawer panel	3
Ⓓ Depth of custom panels	min 16 max 25
Ⓔ Width of door panel - single install	756
Width of door panel - dual install	758
Ⓕ Width of toe-kick panel	759
Ⓖ Height of toe-kick panel**	50 -152**
Maximum weight of top door panel***	max 18.5kg
Maximum weight of bottom drawer panel	max 11.5kg

* Custom door panels, toe-kick and handles to be manufactured / fitted by cabinetmaker.

** The bottom grille can be reduced to allow for a higher toe-kick. Adjust the height of the door panel accordingly.

*** Includes weight of handle.

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

Custom Panel Preparation 76.2cm Integrated Refrigerator Freezer

Model nos:

RS7621WR

NOTE: Left hand hinge model is a mirrored version of image shown.

RS7621WL

Custom Panel Preparation

Dimensions are shown in millimetres (mm).

Dimensions apply for the preparation and installation of custom panels


Handles

Ensure handle screw heads are countersunk into back of panel to avoid interfering with hanging bracket, and clear of side brackets as indicated.


Dwg & Dxf Files

Dwg and Dxf files of the panel preparation are available under the resource information for this product which can be found on

<https://www.fisherpaykel.com>

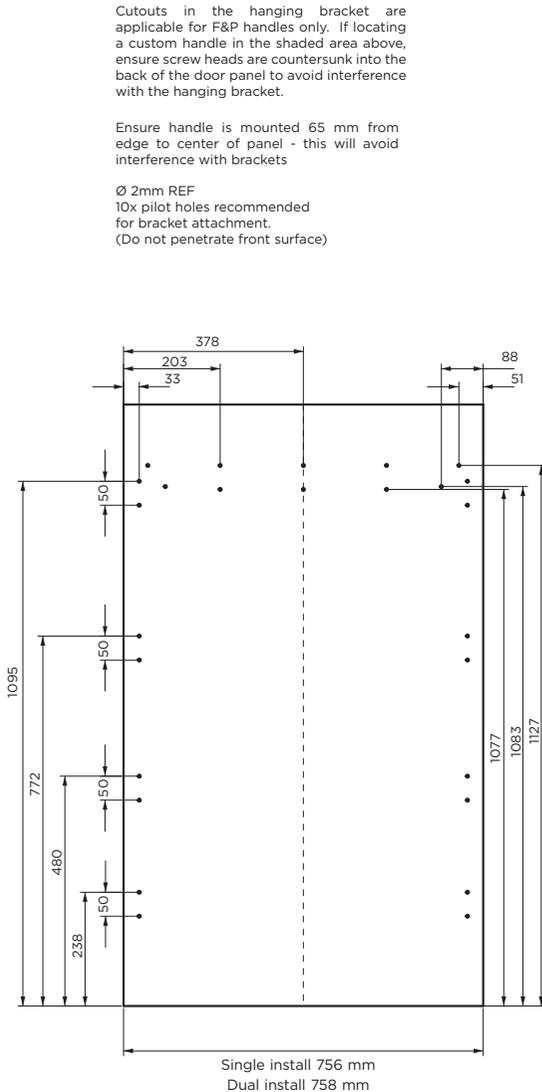

76CM
TOP DOOR PANEL
REAR VIEW

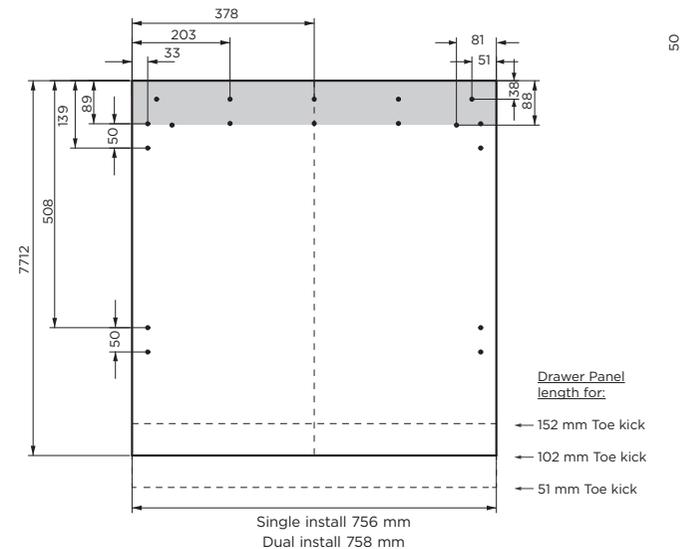



76CM
BOTTOM DRAWER PANEL
REAR VIEW

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://www.fisherpaykel.com)

FISHER & PAYKEL

Cavity Preparation - Frameless 76.2cm Integrated Refrigerator Freezer

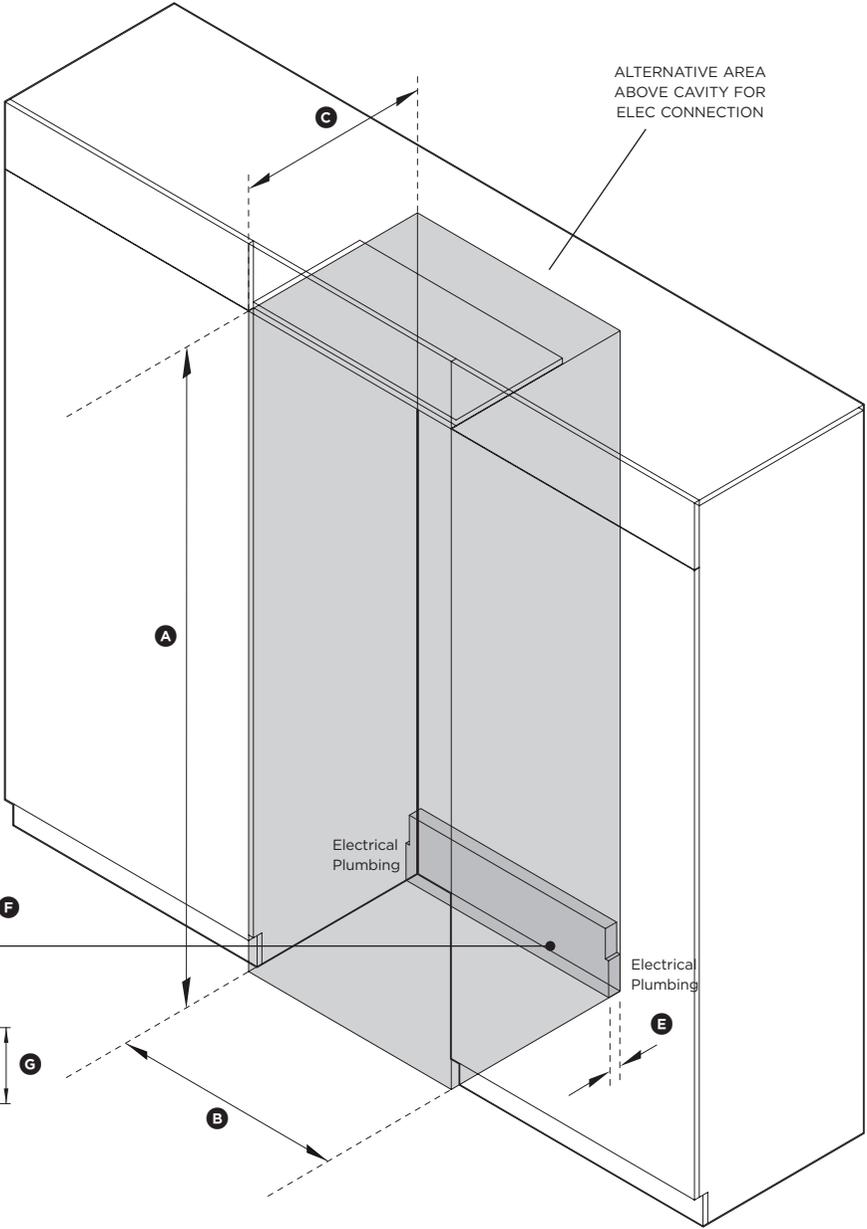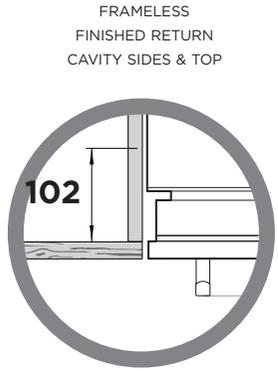

ISO VIEW OF CAVITY

Model nos:
RS7621WRU1
NOTE: Left hand hinge model is a mirrored version of image shown.
RS7621WLU1

IMPORTANT!
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Minimum Cavity Dimensions	mm
Ⓐ Overall height of cavity	2134
Ⓑ Overall width of cavity	762
Ⓒ Minimum overall depth (shallow) of cavity when services are located outside of cavity*	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity*	650
Minimum required finished return	102

*Assumes a door panel depth of 19mm.

Electrical / Plumbing Supply Dimensions	mm
Ⓓ Overall height of supply area	229
Ⓔ Overall depth of supply area	25
Ⓕ Width of notch in supply area (both sides)	13
Ⓖ Height of sides of supply area (both sides)	127

Specifications	
Electrical	
Supply	230 VAC, 50 Hz
Service	10 amp circuit
Plumbing	
Supply	1/2" (12.7mm) comp. stainless steel braided hose with adaptor
Pressure	min 150 kPa (22 psi) max 827 kPa (120 psi) @ 20°C (68°F)



NOTE: Connections may be located in an adjacent cabinet to either side of the fridge.

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

Cavity Preparation - Framed 760mm Integrated Column Fridge / Freezer

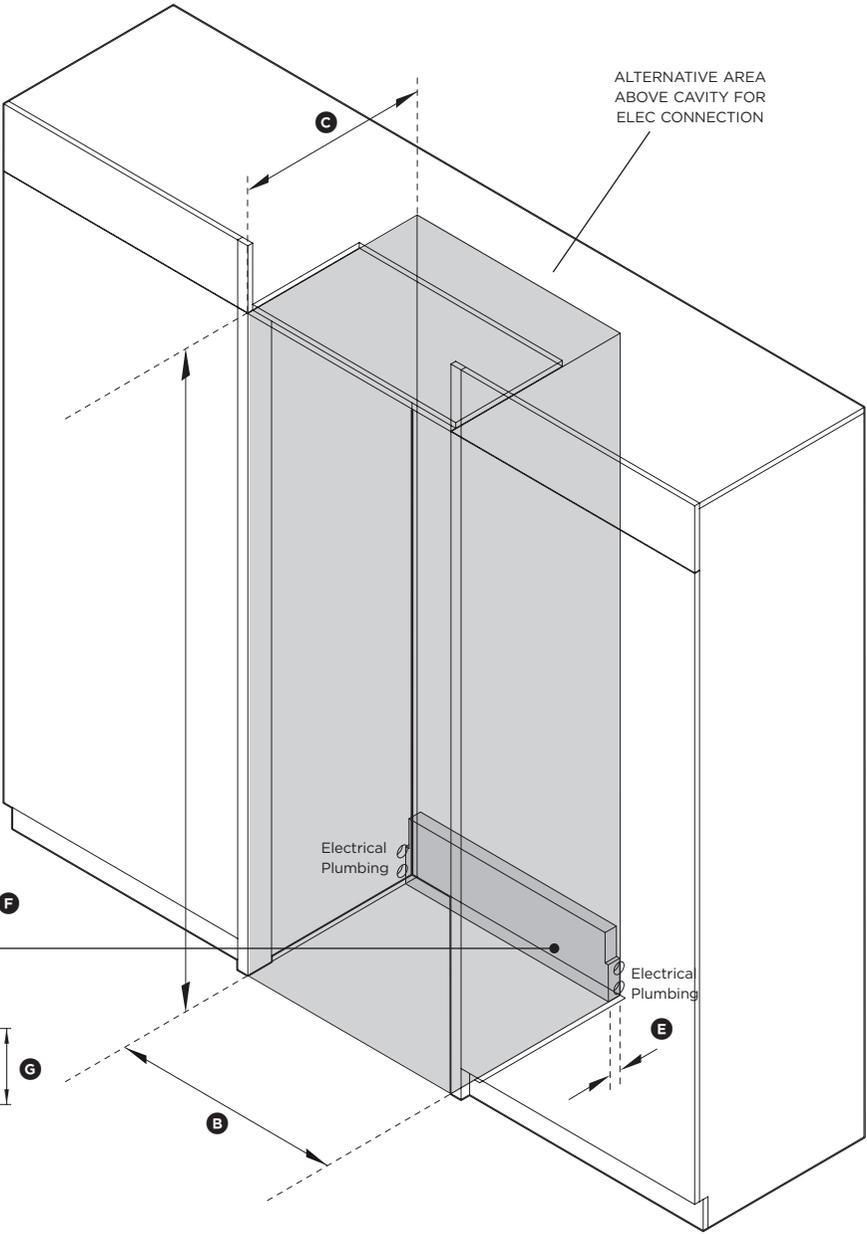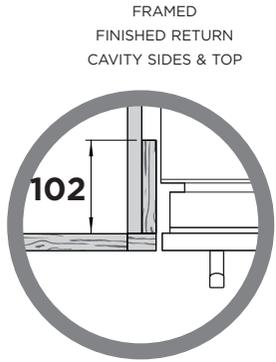

ISO VIEW OF CAVITY

Model nos:
RS7621WRU1
NOTE: Left hand hinge model is a mirrored version of image shown.
RS7621WLU1

IMPORTANT!
For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Minimum Cavity Dimensions	mm
Ⓐ Overall height of cavity	2134
Ⓑ Overall width of cavity	762
Ⓒ Minimum overall depth (shallow) of cavity when services are located outside of cavity*	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity*	650
Minimum required finished return	102

*Assumes a door panel depth of 19mm.

Electrical / Plumbing Supply Dimensions	mm
Ⓓ Overall height of supply area	229
Ⓔ Overall depth of supply area	25
Ⓕ Width of notch in supply area (both sides)	13
Ⓖ Height of sides of supply area (both sides)	127

Specifications	
Electrical	
Supply	230 VAC, 50 Hz
Service	10 amp circuit
Plumbing	
Supply	1/2" (12.7mm) comp. stainless steel braided hose with adaptor
Pressure	min 150 kPa (22 psi) max 827 kPa (120 psi) @ 20°C (68°F)

NOTE: Connections may be located in an adjacent cabinet to either side of the fridge.


DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

POWER AND WATER CONNECTIONS 76.2cm Integrated Refrigerator Freezer

Model nos:
RS7621WRU1
NOTE: Left hand hinge model is a mirrored version of image shown.
RS7621WLU1

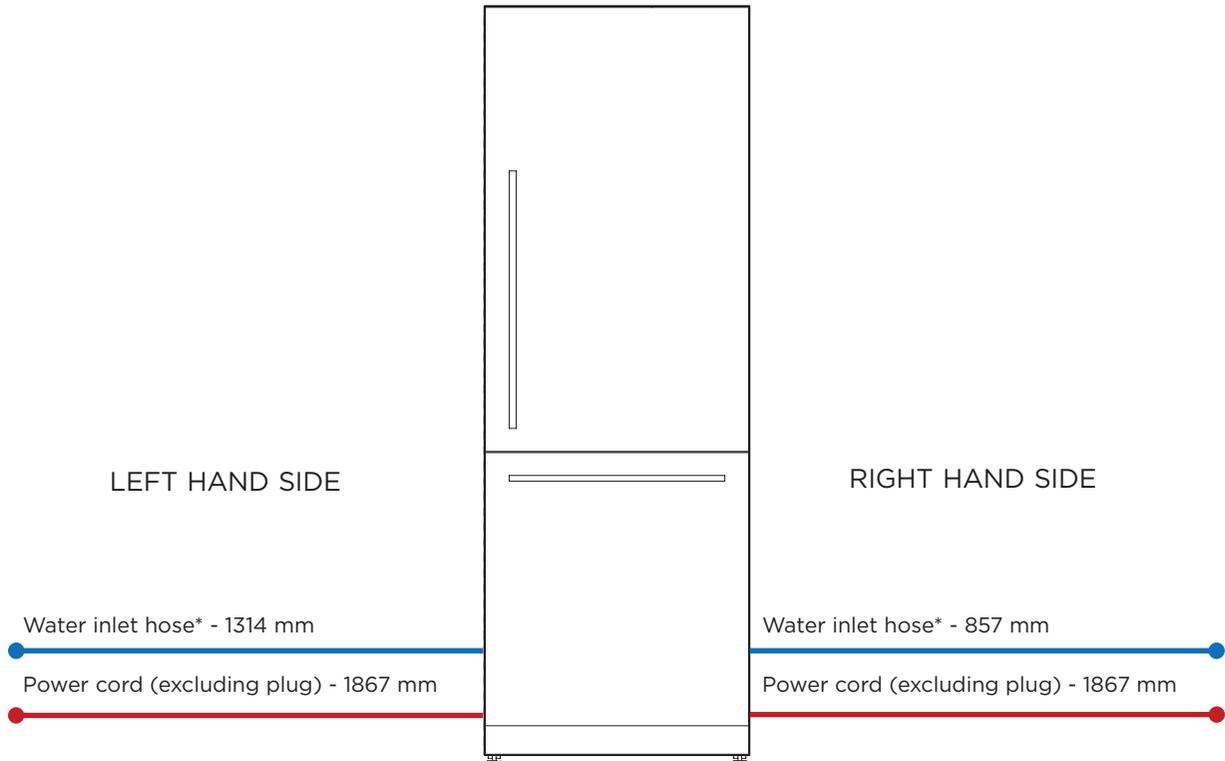

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DUAL INSTALLATION 76.2cm Integrated Refrigerator Freezer Right & Left hand hinge

Model nos:
RS7621WRU1 & RS7621WLU1

IMPORTANT!
For ease of installation, ensure cavity has consistent dimensions
top to bottom and left to right.

Clearance Dimensions	mm
Ⓐ Overall height of cavity	2134
Ⓑ Overall width of cavity*	1524
Ⓒ Minimum overall depth (shallow) of cavity when services are located outside of cavity**	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity**	650
Ⓓ Width of supply area behind individual fridge/freezer	762
Ⓔ Height of supply area	229
Ⓕ Height of sides of supply area	127
Ⓖ Width of notch in supply area	13
Ⓙ Combined width in from side of supply areas	25
Ⓚ Depth of supply areas	25
Minimum door cabinetry gap clearance	3

Custom Panel Dimensions***	mm
Ⓛ Height of fridge door panel	1254
Ⓜ Height of freezer drawer panel	721 - 822
Ⓝ Gap between door and drawer panel	3
Ⓞ Depth of door panel	min 16 max 25
Ⓟ Width of door panel - single install	756
Width of door panel - dual install	758
Ⓠ Width of custom toekick panel****	1521
Ⓡ Height of custom toekick panel****	50 - 152
Maximum weight of fridge door panel (including handle*****)	max 18.5kg
Maximum weight of freezer drawer panel (including handle*****)	max 11.5kg

* Columns attach directly together. No cavity divider is necessary (unless arranging hinge to hinge).

**Assumes a door panel depth of 19mm.

Connections may be located in an adjacent cabinet to either side of the fridge.


*** Custom panels to be manufactured & fitted by cabinetmaker.

**** Optional 100mm tall stainless steel toekick panel available. Alternatively, a custom built toekick (H 50mm-152mm x W 1521mm) may be fitted as shown. Adjust the height of the door panel accordingly.

***** Door handle kit is available as an optional accessory.

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

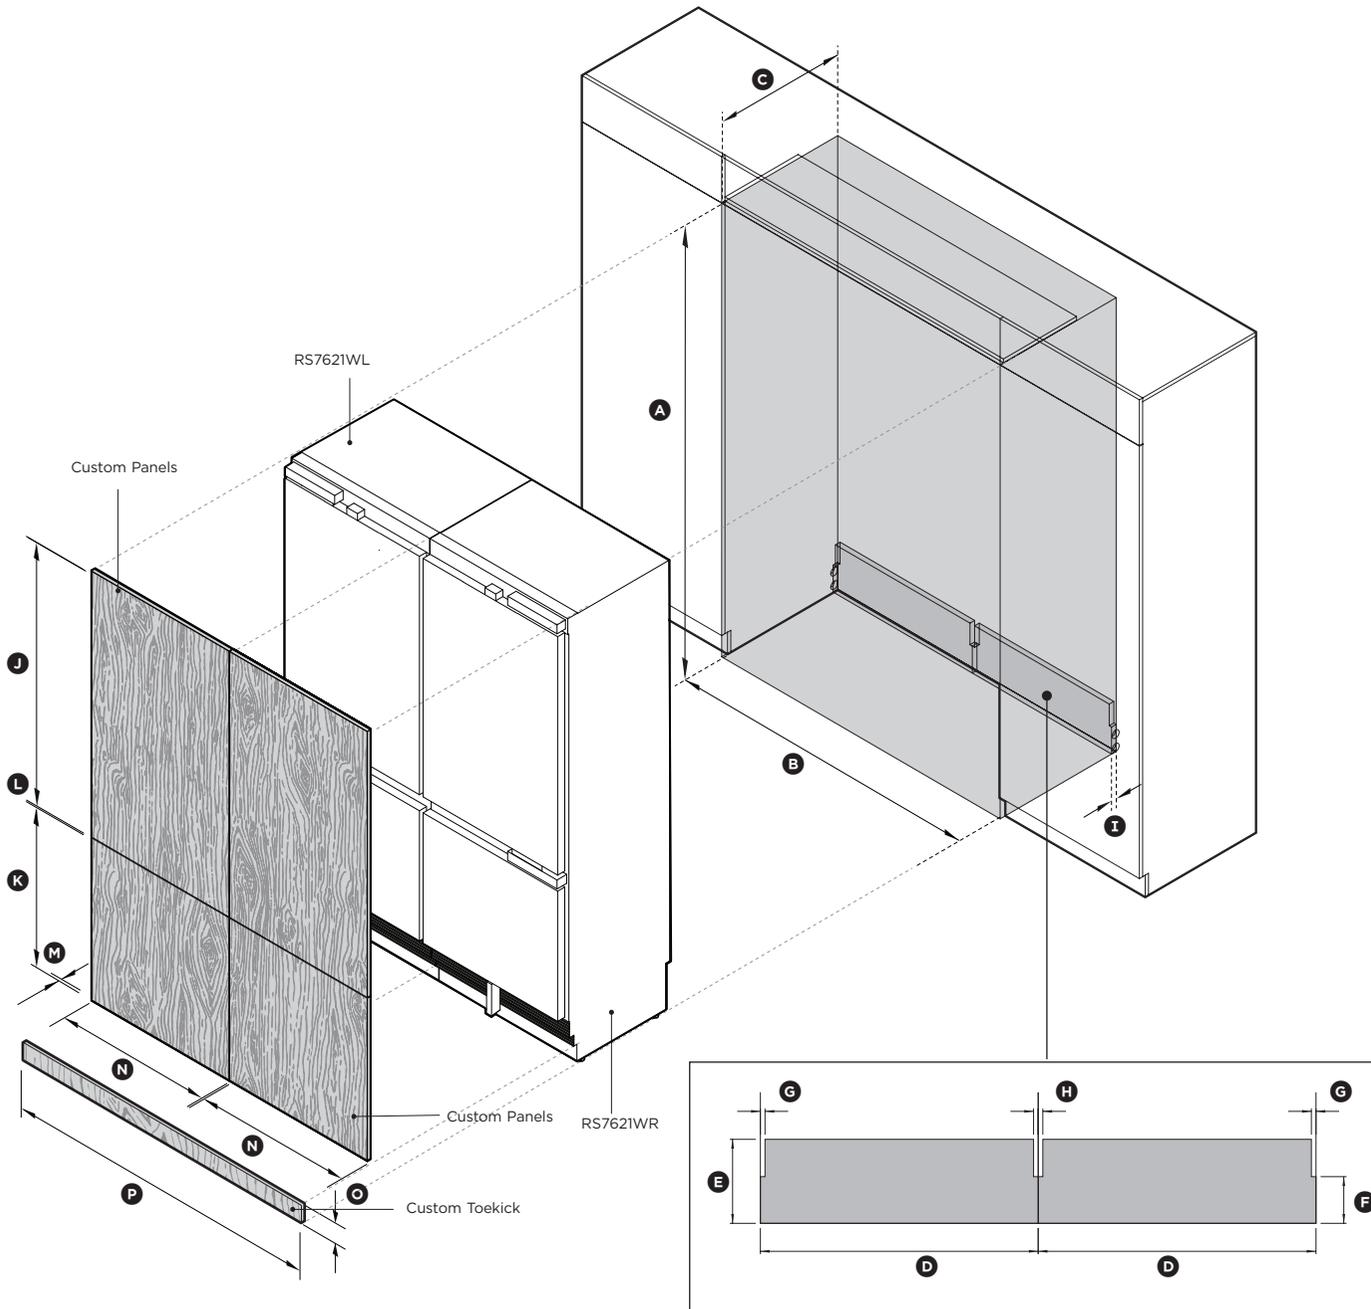

FISHER & PAYKEL

DUAL INSTALLATION 76.2cm Integrated Refrigerator Freezer Right Hand Hinge 76.2cm Integrated Refrigerator Left Hand Hinge

Model nos:

RS7621WRU1 & RS7620SLK1

IMPORTANT!

For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Clearance Dimensions	mm
Ⓐ Overall height of cavity	2134
Ⓑ Overall width of cavity*	1524
Ⓒ Minimum overall depth (shallow) of cavity when services are located outside of cavity**	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity**	650
Ⓓ Width of supply area behind individual fridge/freezer	762
Ⓔ Height of supply area	229
Ⓕ Height of sides of supply area	127
Ⓖ Width of notch in supply area	13
Ⓗ Combined width in from side of supply areas	25
Ⓘ Depth of supply areas	25
Minimum door cabinetry gap clearance	3

Custom Panel Dimensions***

Custom Panel Dimensions***	mm
Ⓙ Height of fridge door panel RS7621WR	1254
Ⓚ Height of freezer drawer panel RS7621WR	721 - 822
Ⓛ Gap between door and drawer panel	3
Ⓜ Height of fridge door panel RS7621SL	1979-2079
Ⓝ Depth of door panels	min 16 max 25
Ⓞ Width of door panel - single install	756
Width of door panel - dual install	758
Ⓟ Width of custom toe kick panel****	1521
Ⓠ Height of custom toe kick panel****	50 - 152
Maximum weight of fridge door panel	max 18.5kg
Maximum weight of freezer drawer panel	max 11.5kg
Maximum weight of fridge door panel	max 25kg

* Columns attach directly together. No cavity divider is necessary (unless arranging hinge to hinge).

**Assumes a door panel depth of 19mm.


Connections may be located in an adjacent cabinet to either side of the fridge.

*** Custom panels to be manufactured & fitted by cabinetmaker.

**** Optional 100mm tall stainless steel toe kick panel available. Alternatively, a custom built toe kick (H 50mm-152mm x W 1521mm) may be fitted as shown. Adjust the height of the door panel accordingly.

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

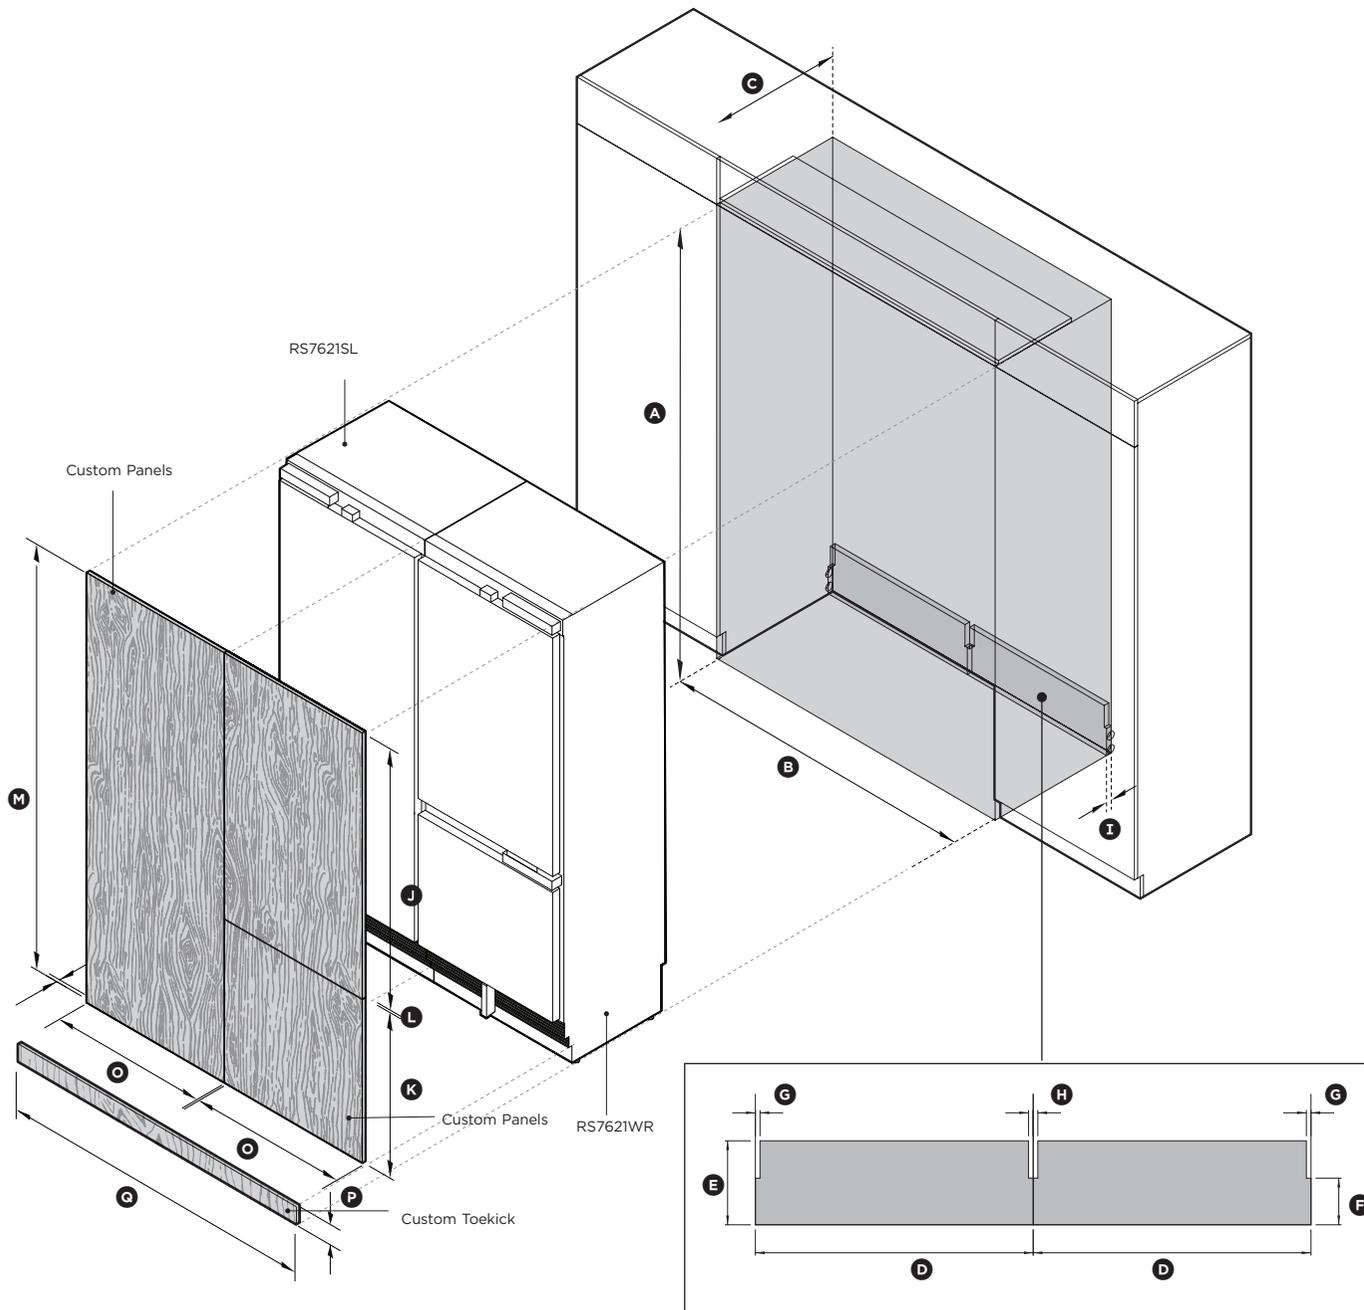

FISHER & PAYKEL

DUAL INSTALLATION 76.2cm Integrated Refrigerator Freezer Right & Left hand hinge with Stainless Steel Door Panels

Model nos:
RS7621WRU1, Door Panel RS7621WR
RS7621WLU1, Door Panel RS7621WL

IMPORTANT!
For ease of installation, ensure cavity has consistent dimensions
top to bottom and left to right.

Clearance Dimensions	mm
Ⓐ Overall height of cavity	2134
Ⓑ Overall width of cavity*	1524
Ⓒ Minimum overall depth (shallow) of cavity when services are located outside of cavity** Minimum overall depth (deep) of cavity when services are located at rear of cavity**	635 650
Ⓓ Width of supply area behind individual fridge/freezer	762
Ⓔ Height of supply area	229
Ⓕ Height of sides of supply area	127
Ⓖ Width of notch in supply area	13
Ⓗ Combined width in from side of supply areas	25
Ⓘ Depth of supply areas	25
Minimum door cabinetry gap clearance	3

Stainless Steel Panel Dimensions	mm
⓵ Height of fridge door panel	1254
⓶ Height of freezer drawer panel	772
⓷ Gap between door and drawer panel	3
⓸ Depth of door panel	19
⓹ Width of door panel	756
⓺ Width of toe kick panel	1521
⓻ Height of toe kick panel	102
⓼ Height of toe kick panel	
⓽ Gap between doors (min. 4mm gap can be achieved by equalizing the doors)	6


* Columns refrigerators & freezers attach directly together. No cavity divider is necessary (unless arranging hinge to hinge).

** With cavity at minimum depth, electrical and water connections must be within the supply area shown if located behind the appliance, and must not protrude from the back wall.


Connections may be located in an adjacent cabinet to either side of the fridge.
HANDLES: Handle Kits are sold separately.
Shown with handle kit ADH3-RD7621W. Other style options available.

DATE: 17/1/2022



IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

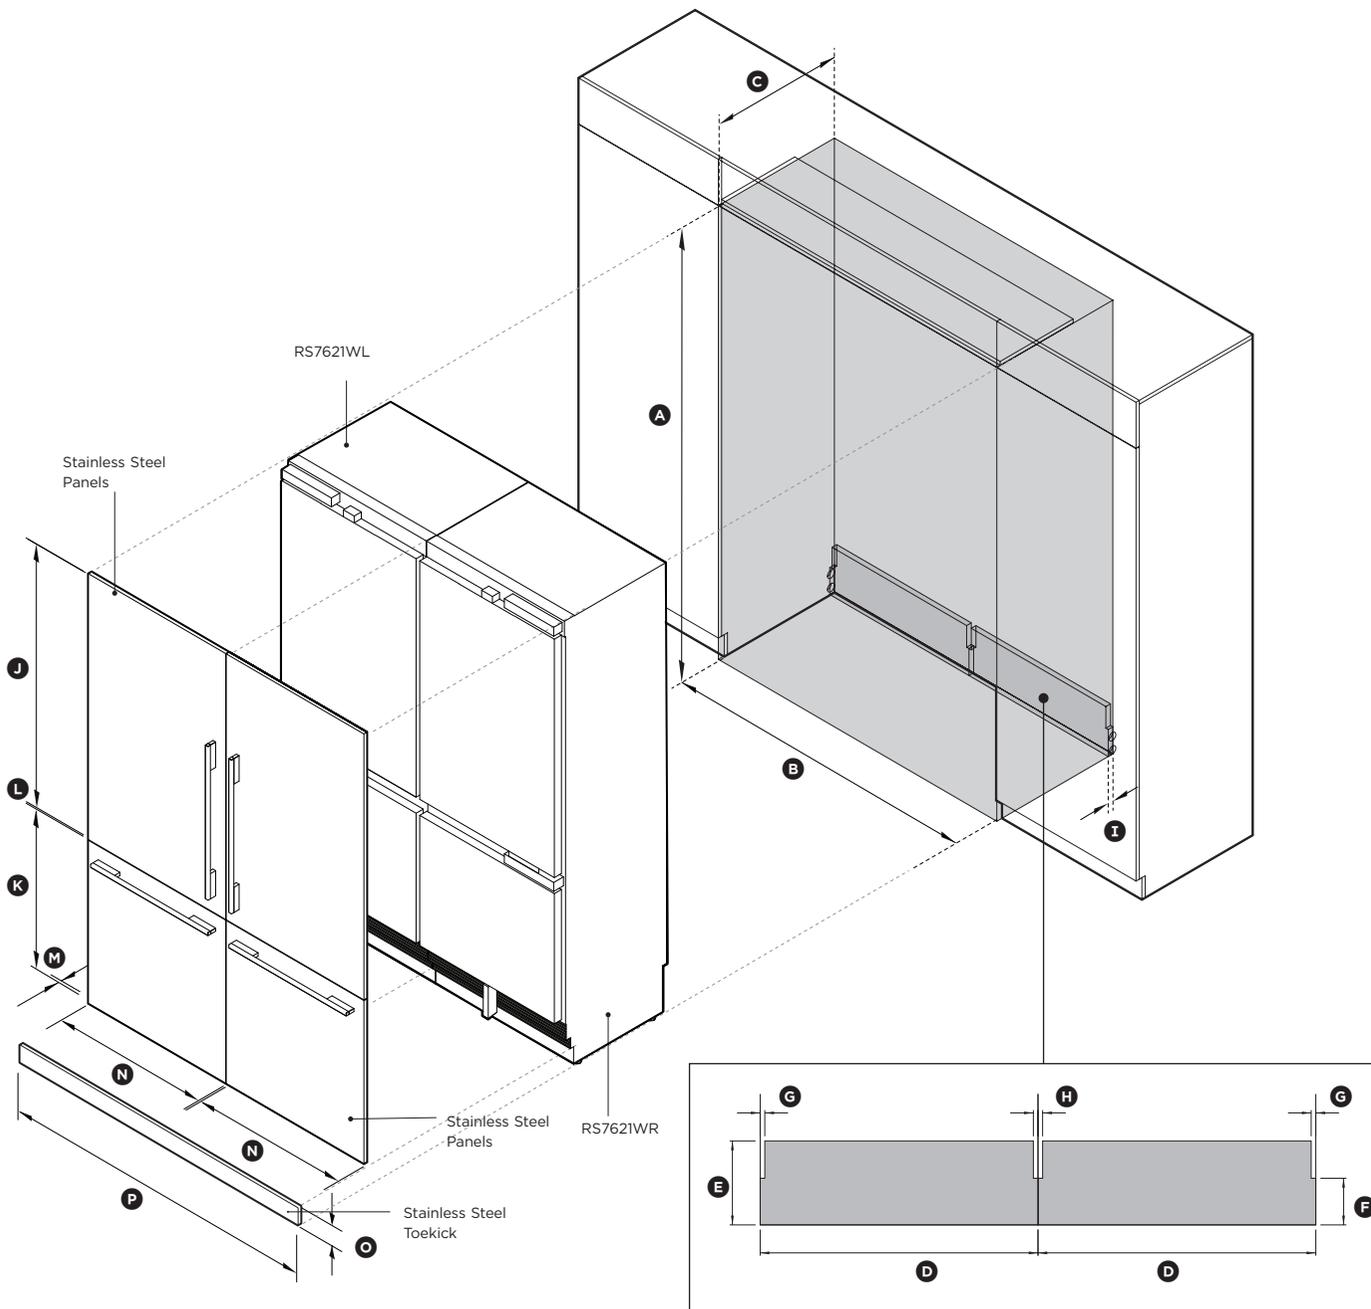

1 VERTICAL HANDLE

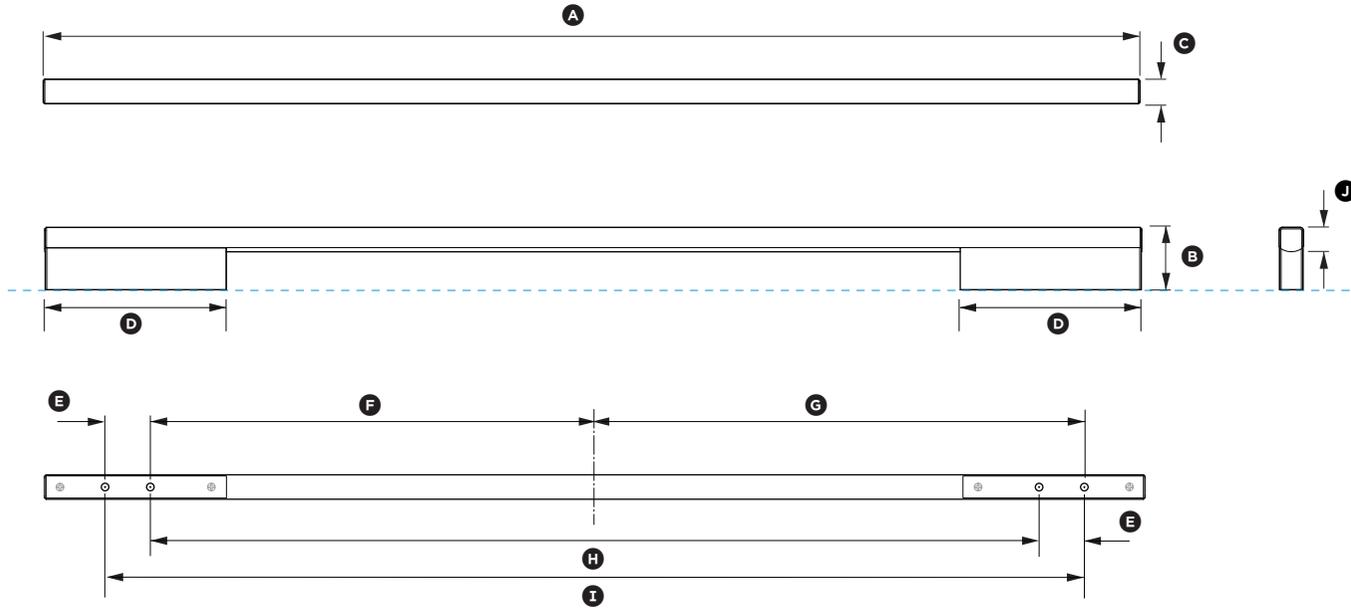

2 HORIZONTAL HANDLE

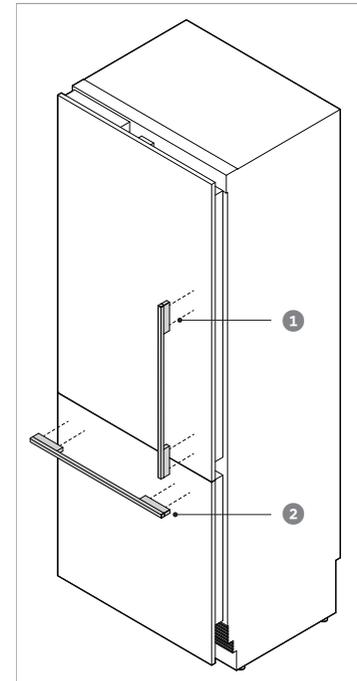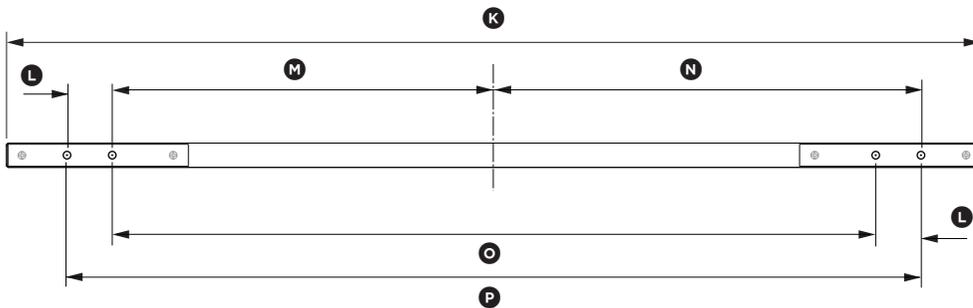

FISHER & PAYKEL

HANDLE DATA SHEET 76.2cm Integrated Refrigerator Freezer Square Aluminium Handle

Model no:

Square Aluminium Handle AHD3RD7621W

For Models:

RS7621WRUK1 & RS7621WLUK1

Vertical Handle Dimensions *	mm
Ⓐ Overall length of handle	727
Ⓑ Overall height of handle	41
Ⓒ Overall width of handle	16
Ⓓ Length of off-stand	120
Ⓔ Distance between attachment holes between each off-stand	30
Ⓕ Distance from centerline to inner attachment holes	293.5
Ⓖ Distance from centerline to outer attachment holes	323.5
Ⓗ Distance between inner attachment holes	587
Ⓙ Distance between outer attachment holes	647
Ⓝ Thickness of handle rail	16

Horizontal Handle Dimensions *	mm
Ⓚ Overall width of handle	646
Ⓛ Distance between attachment holes between each off-stand	30
Ⓜ Distance from centerline to inner attachment holes	253
Ⓝ Distance from centerline to outer attachment holes	283
Ⓞ Distance between inner attachment holes	506
Ⓟ Distance between outer attachment holes	566




M5 X 25mm Pan Head Socket Screw
(4 per handle)
Suits standard 19mm panel. Thicker panels may require counterboring or longer screws.

INDICATES PRODUCT DATUM



DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

1 VERTICAL HANDLE

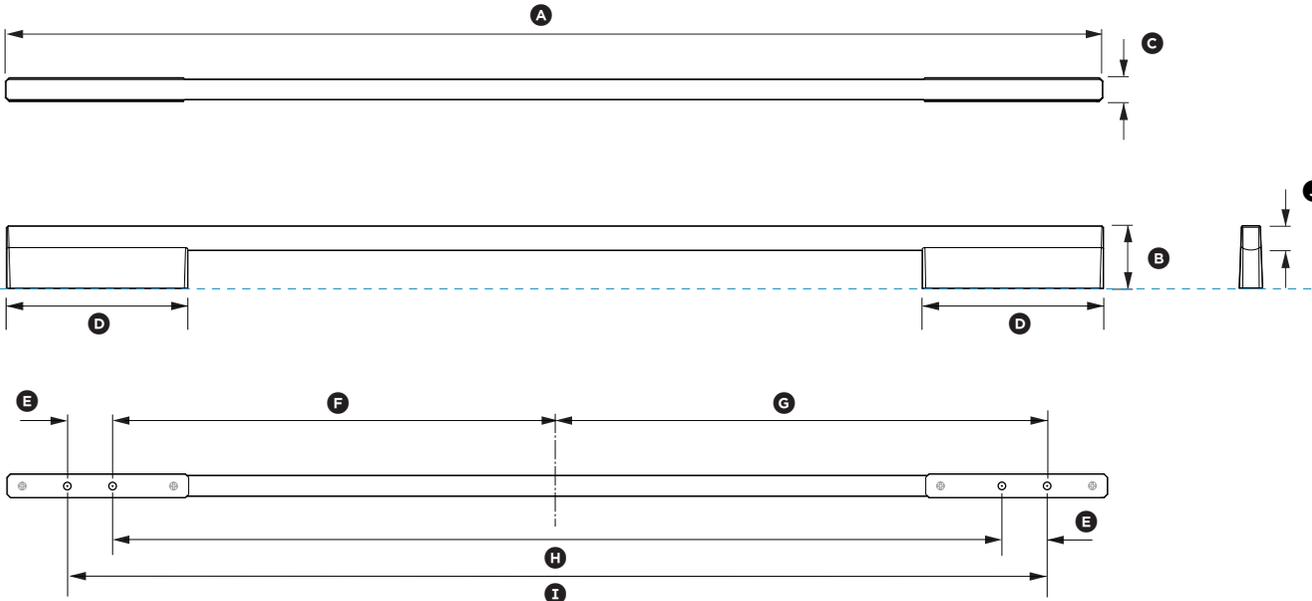

2 HORIZONTAL HANDLE

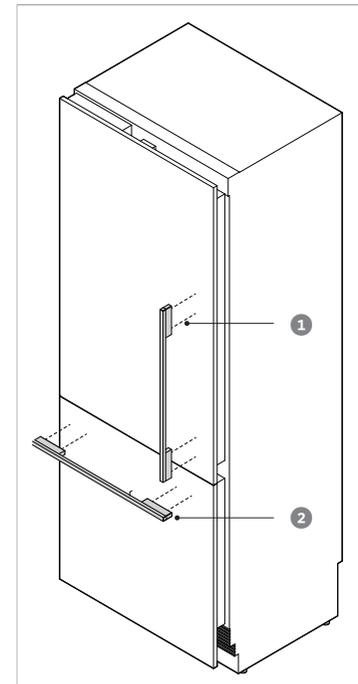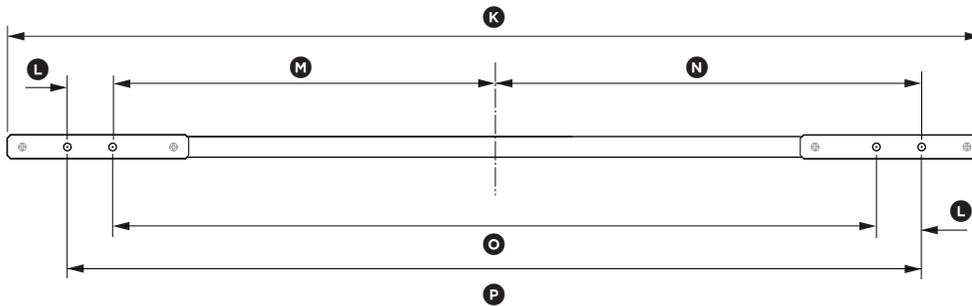

FISHER & PAYKEL

HANDLE DATA SHEET 76.2cm Integrated Refrigerator Freezer Square Fine Aluminium Handle

Model no:

For Square Fine Aluminium Handle AHD5RD7621W
Black Square Fine Aluminium Handle AHD5RD7621WB

For Models:

RS7621WRUK1 & RS7621WLUK1

Vertical Handle Dimensions *	mm
A Overall length of handle	727
B Overall height of handle	41
C Overall width of handle	15
D Length of off-stand	120
E Distance between attachment holes between each off-stand	30
F Distance from centerline to inner attachment holes	293.5
G Distance from centerline to outer attachment holes	323.5
H Distance between inner attachment holes	587
I Distance between outer attachment holes	647
J Thickness of handle rail	16

Horizontal Handle Dimensions *	mm
K Overall width of handle	646
L Distance between attachment holes between each off-stand	30
M Distance from centerline to inner attachment holes	252
N Distance from centerline to outer attachment holes	283
O Distance between inner attachment holes	506
P Distance between outer attachment holes	566

*All the dimensions are the same for the vertical and horizontal handles, except for the handle length and the mounting hole distance.




M5 X 25mm Pan Head Socket Screw
(4 per handle)
Suits standard 19mm panel. Thicker panels may require counterboring or longer screws.

INDICATES PRODUCT DATUM



DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

1 VERTICAL HANDLE

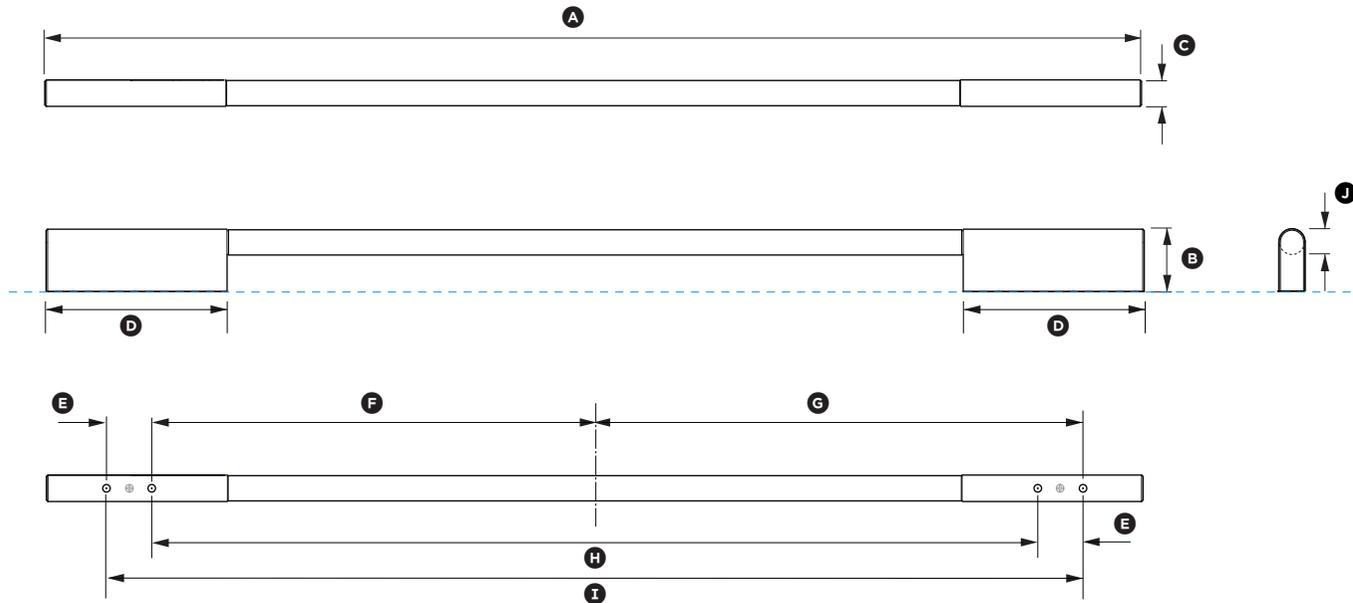

2 HORIZONTAL HANDLE

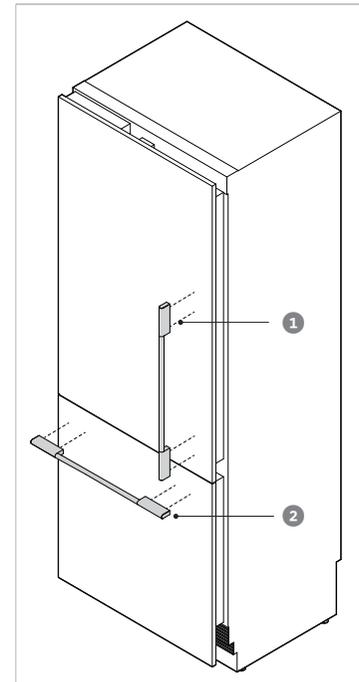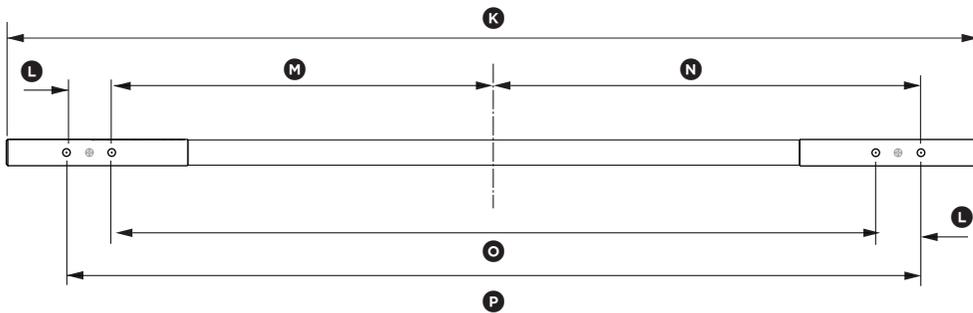

FISHER & PAYKEL

HANDLE DATA SHEET 76.2cm Integrated Refrigerator Freezer Round Aluminium Handle

Model no:

Round Aluminium Handle AHDSRD7621W

For Models:

RS7621WRUK1 & RS7621WLUK1

RS6121WRUK1 & RS6121WLUK1	mm
Ⓐ Overall length of handle	727
Ⓑ Overall height of handle	41
Ⓒ Overall width of handle	15
Ⓓ Length of off-stand	120
Ⓔ Distance between attachment holes between each off-stand	30
Ⓕ Distance from centerline to inner attachment holes	293.5
Ⓖ Distance from centerline to outer attachment holes	323.5
Ⓗ Distance between inner attachment holes	587
Ⓘ Distance between outer attachment holes	647
Ⓝ Thickness of handle rail	16

Ⓔ Handle Dimensions *	mm
Ⓒ Overall width of handle	646
Ⓝ Distance between attachment holes between each off-stand	30
Ⓕ Distance from centerline to inner attachment holes	253
Ⓖ Distance from centerline to outer attachment holes	283
Ⓗ Distance between inner attachment holes	506
Ⓘ Distance between outer attachment holes	566

*All the dimensions are the same for the vertical and horizontal handles, except for the handle length and the mounting hole distance.




M5 X 25mm Pan Head Socket Screw
(4 per handle)
Suits standard 19mm panel. Thicker panels may require counterboring or longer screws.

INDICATES PRODUCT DATUM


DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

1 VERTICAL HANDLE

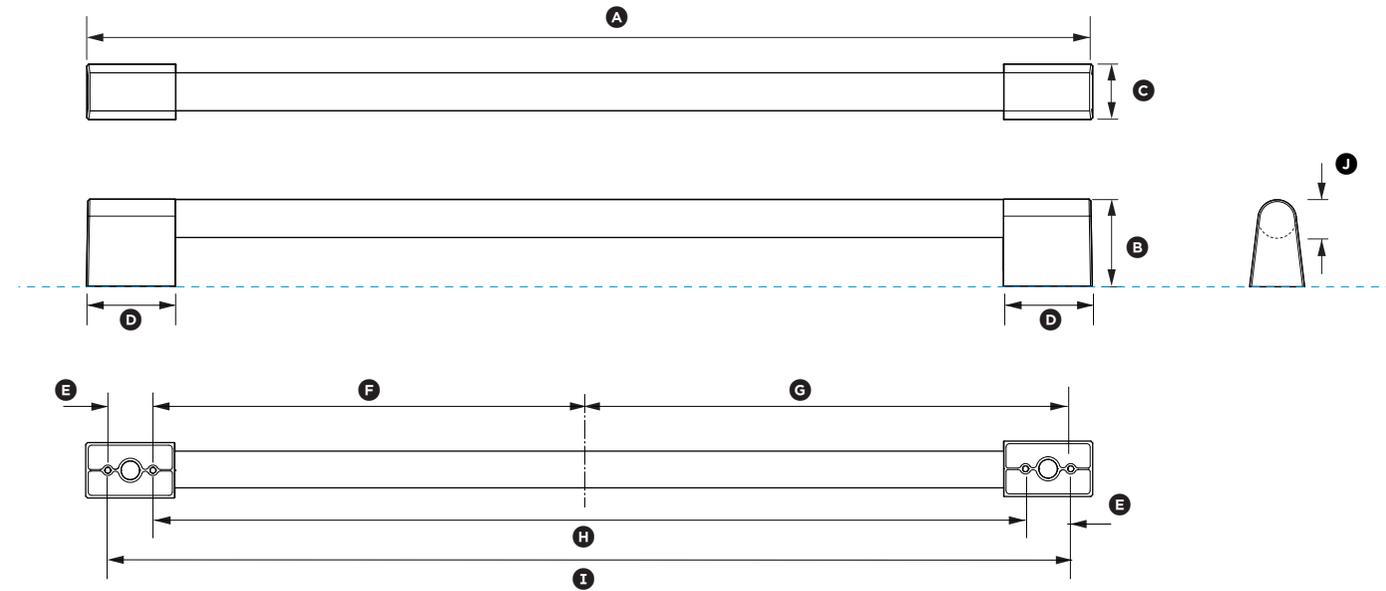

2 HORIZONTAL HANDLE

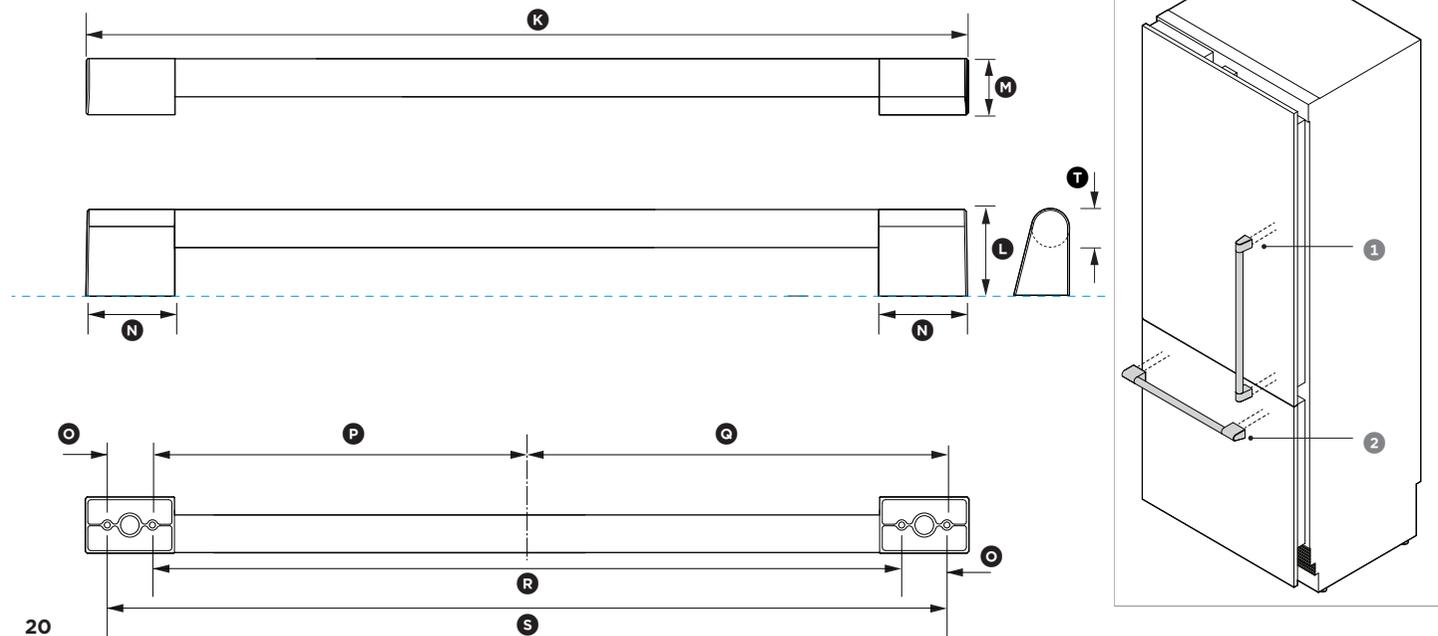

20

FISHER & PAYKEL

HANDLE DATA SHEET 76.2cm Integrated Refrigerator Freezer Professional Flush Handle

Model no:

Professional Flush Handle AHP3RD762IW

For Models:

RS7621WRUK1 & RS7621WLUK1

RS6121WRUK1 & RS6121WLUK1	mm
Ⓐ Overall length of handle	677
Ⓑ Overall height of handle	58
Ⓒ Overall width of handle	37
Ⓓ Length of off-stand	60
Ⓔ Distance between attachment holes between each off-stand	30
Ⓕ Distance from centerline to inner attachment holes	293
Ⓖ Distance from centerline to outer attachment holes	323.5
Ⓗ Distance between inner attachment holes	586
Ⓙ Distance between outer attachment holes	647
⓫ Thickness of handle rail	25

Ⓐ Horizontal Handle Dimensions *	mm
Ⓐ Overall length of handle	594
Ⓑ Overall height of handle	58
Ⓒ Overall width of handle	37
Ⓓ Length of off-stand	60
Ⓔ Distance between attachment holes between each off-stand	30
Ⓕ Distance from centerline to inner attachment holes	253
Ⓖ Distance from centerline to outer attachment holes	283
Ⓗ Distance between inner attachment holes	506
Ⓙ Distance between outer attachment holes	566
⓫ Thickness of handle rail	25



M5 X 25mm Pan Head Socket Screw
(4 per handle)
Suits standard 19mm panel. Thicker panels may require counterboring or longer screws.

INDICATES PRODUCT DATUM

DATE: 17/1/2022

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL