

# FISHER & PAYKEL

## DATA SHEET

Integrated Insert Cooker Hood, 90cm

### Model nos:

HP90IHCB4

### Product Dimensions

	mm
Ⓐ Overall height of cooker hood without ducting adaptor	316
Ⓑ Overall height of cooker hood with ducting adaptor	364
Ⓒ Overall width of cooker hood	830
Ⓓ Overall depth of cooker hood (excl. cabinetry front panel)	280
Ⓔ Diameter of ducting adaptor	150
Ⓕ Width of cooker hood chassis	792
Ⓖ Depth of cooker hood chassis	258
Ⓗ Thickness of flange	2
Ⓙ Distance from ducting outlet centre to rear of chassis	152
Ⓚ Height adjustability of clip that secures cooker hood (cabinet base panel thickness)	min 15 max 40
Ⓛ Distance from rear to centre of light	253

### Cavity Dimensions Standard Installation


	mm
Width of cutout	800
Depth of cutout	260

### Minimum distance above cooktops


	mm
Minimum height from top of electric cooktop to base of product	600
Minimum height from top of gas cooktop to base of product	650

Minimum height may be greater if required by your cooktop. Refer to cooktop installation guide for details.


Note: We recommend the cabinet has a door or service panel that can be easily opened to access the power connection.

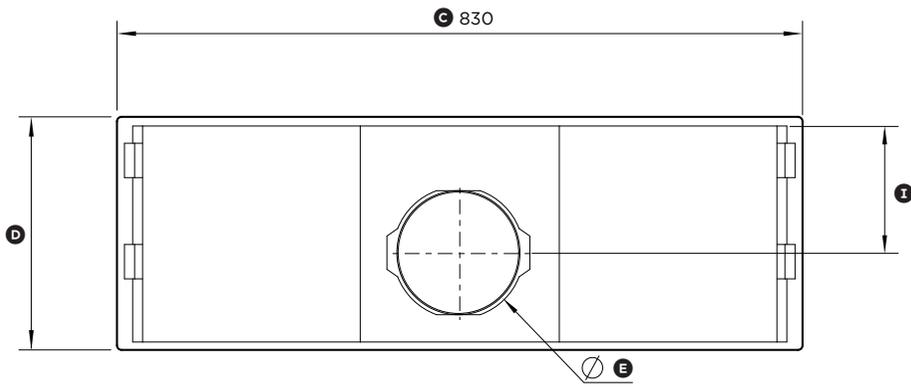


PLAN VIEW




NOT TO SCALE

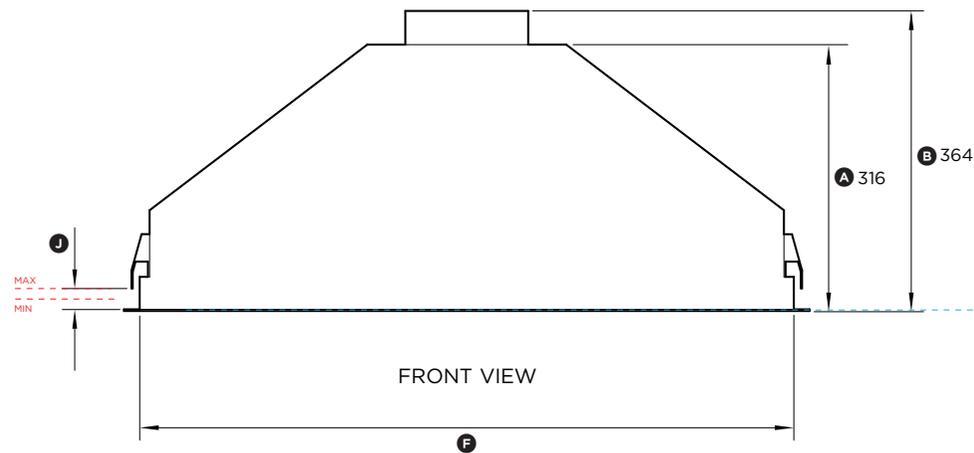

FRONT VIEW

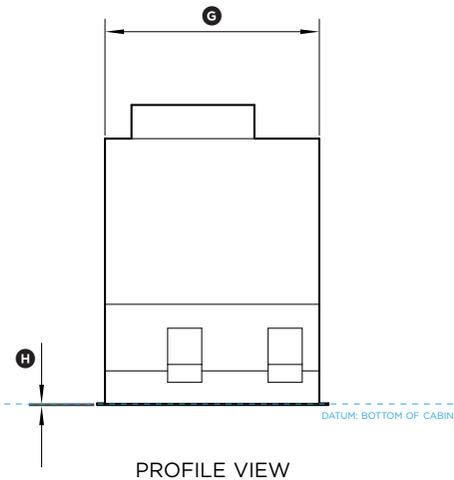

PROFILE VIEW

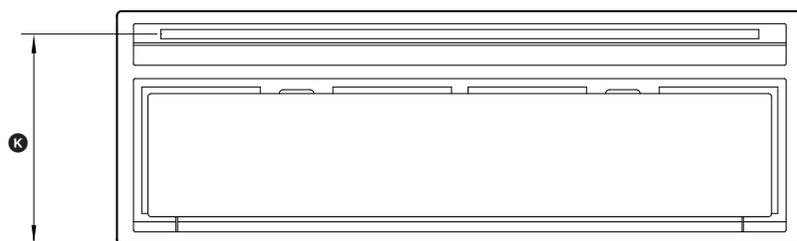

BOTTOM VIEW



INDICATES CUTOUT -----  
 INDICATES PRODUCT DATUM -----  
 INDICATES CABINETY CLEARANCES -----

DATE: 19.12.2023

90003271B

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2$ mm (1/16"). Please read the installation guide for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)