

**INTEGRATED DOUBLE DISHDRAWER**

---

# PLANNING GUIDE

---

DD24DI9 N | DD24DHI9 N

DD24DTI9 N

DD24DTX6I1 | DD24DTX6HI1

**FISHER & PAYKEL**

# PLANNING GUIDE | INTEGRATED DOUBLE DISHDRAWER

DD24DI9 N | DD24DHI9 N | DD24DTI9 N | DD24DTX6I1 | DD24DTX6IH1

This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

## CONTENTS





CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Design Choices	4	<b>Data Sheets DD24DI9 N &amp; DD24DHI9 N</b>	<b>5</b>	<b>Handle Kits</b>	<b>23</b>
		Stainless Steel Door Panels	6	Contemporary Square Handle	24
		Custom Door Panels	7	Contemporary Square Fine Handle	25
		Stainless Recessed Handle Door Panels	8	Contemporary Round	26
		Glass Recessed Handle Door Panels	9	Professional Round Flush Handle	27
		Toe Kick Information	10	Classic Round Handle	28
		<b>Data Sheets DD24DTI9 N</b>	<b>11</b>		
		Stainless Steel Door Panels	12		
		Custom Door Panels	13		
		Stainless Recessed Handle Door Panels	14		
		Glass Recessed Handle Door Panels	15		
		Toe Kick Information	16		
		<b>Data Sheets DD24DTX6I1 &amp; DD24DTX6IH1</b>	<b>17</b>		
		Stainless Steel Door Panels	18		
		Custom Door Panels	19		
		Stainless Recessed Handle Door Panels	20		
		Glass Recessed Handle Door Panels	21		
		Toe Kick Information	22		

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website [fisherpaykel.com](https://fisherpaykel.com)

## DESIGN CHOICES



**DATA SHEETS**  
**DD24DI9 N & DD24DHI9 N**

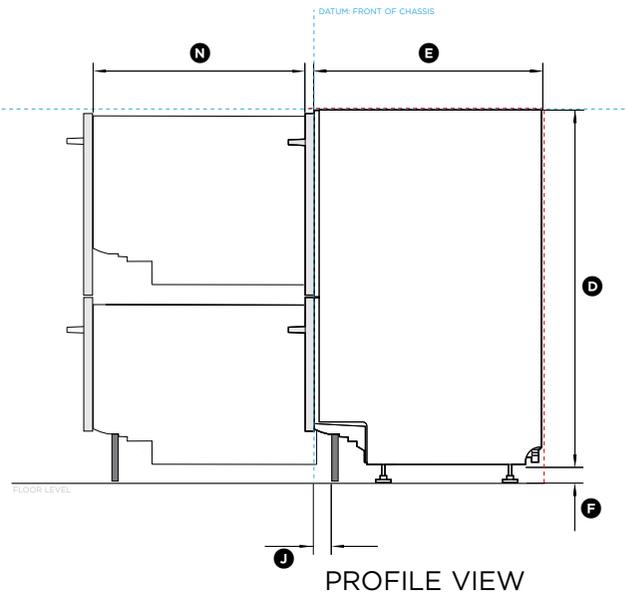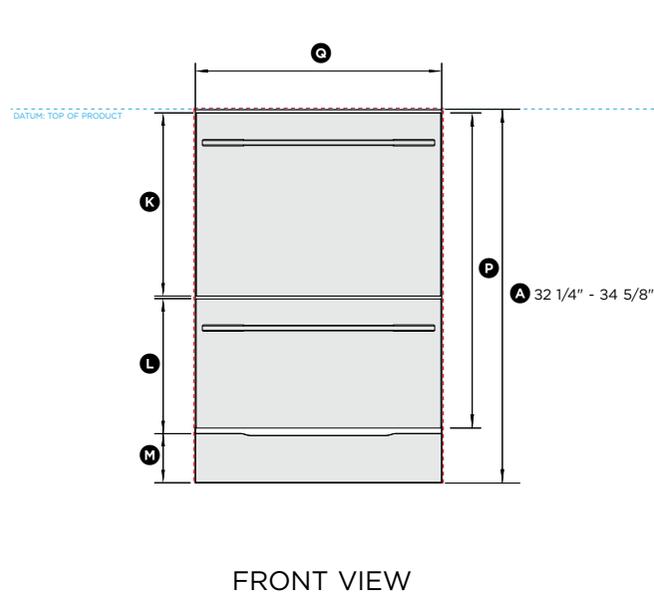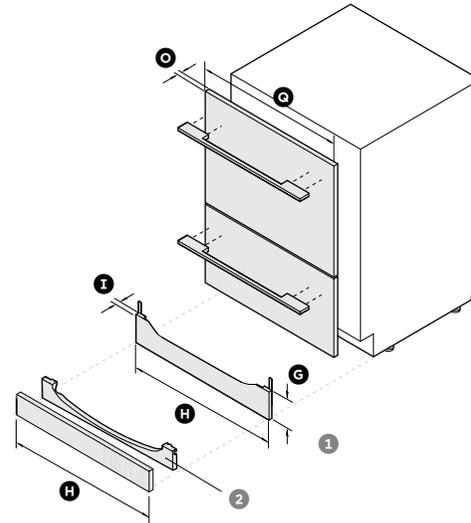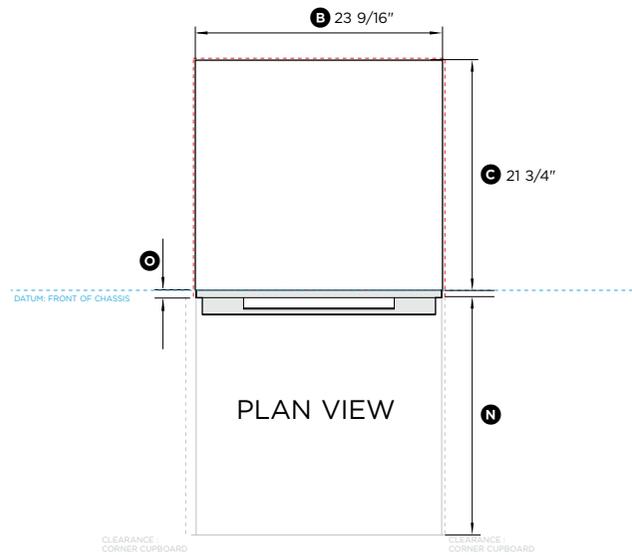

Model nos:

**DD24D19 N & DD24DH19 N**

Shown with Stainless Steel Panels, ADDD24DPX

Shown with Contemporary Square Fine Handle, AHD5OBDD60SX

**Product includes the following Toe Kicks:**

- 1 Flush Pre-Finished Toe Kick
- 2 Custom Toe Kick bracket

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	32 1/4 - 34 5/8	820 - 880
B Overall width of product	23 9/16	599
C Overall depth of product (without handle and door panel)	21 3/4	553
D Height of chassis	31 15/16	811
E Depth of chassis	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Flush pre-finished toe kick panel height (customisable) 2	5	127
H Toe kick panel width	23 7/15	596
I Flush pre-finished toe kick panel depth 1	5/8	16
J Flush pre-finished toe kick recess depth 1	13/16 - 3 1/8	20 - 80
Custom toe kick bracket recess depth 2**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	15 11/16	398
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer	20 3/4	527
O Depth of door panel	11/16	18
P Height of door panels	28 1/4	717
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick panel





Minimum Clearances	inch	mm
Minimum inside height of cavity*	32 9/32	820
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 1/16	560
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry

INDICATES PRODUCT DATUM -----  
 INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

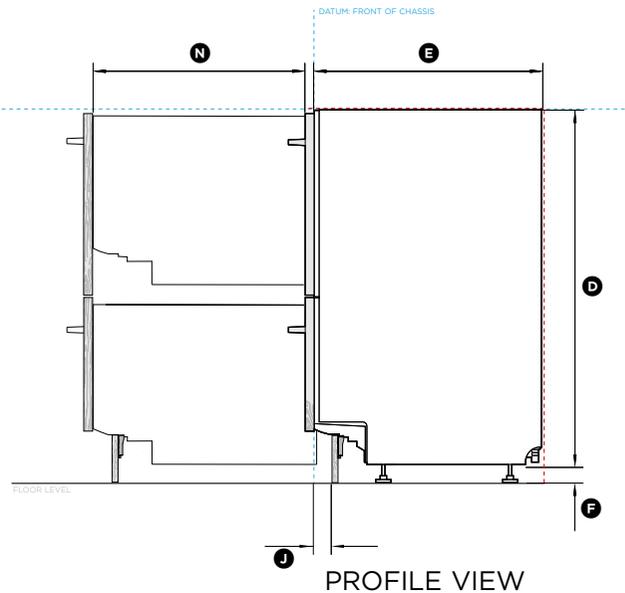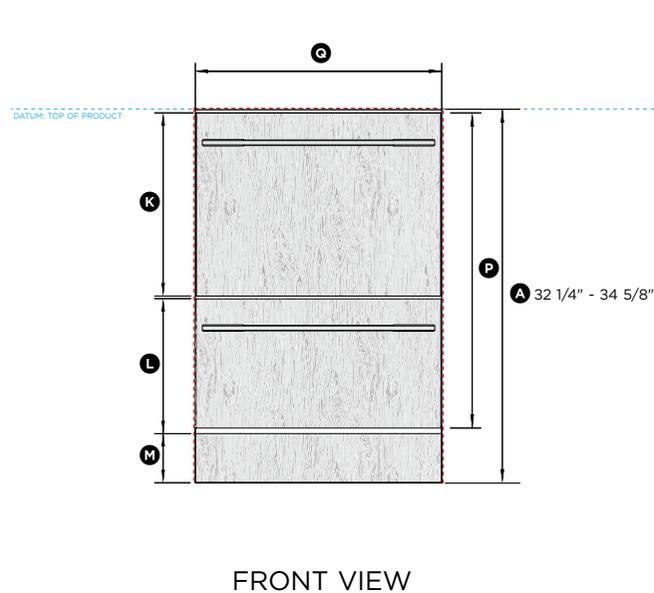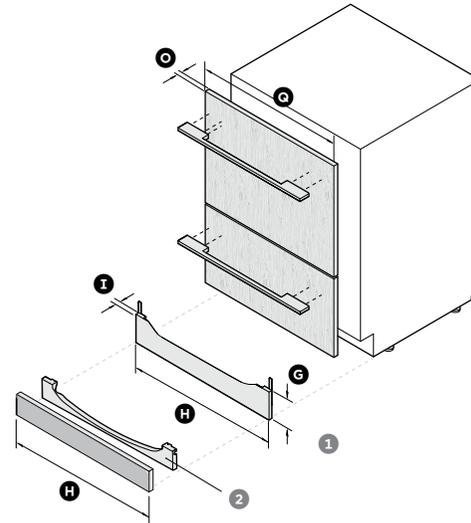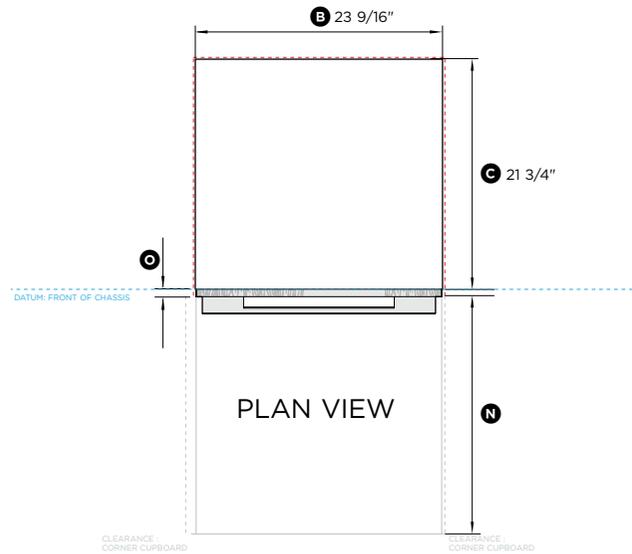

Model nos:

**DD24D19 N & DD24DH19 N**

Shown with Custom Door Panels

Shown with Contemporary Square Fine Handle, AHD50BDD60SX

**Product includes the following Toe Kicks:**

- 1 Flush Pre-Finished Toe Kick
- 2 Custom Toe Kick bracket

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	32 1/4 - 34 5/8	820 - 880
B Overall width of product	23 9/16	599
C Overall depth of product (without handle and door panel)	21 3/4	553
D Height of chassis	31 15/16	811
E Depth of chassis	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Flush pre-finished toe kick panel height (customisable) 2	5	127
H Toe kick panel width	23 7/15	596
I Flush pre-finished toe kick panel depth 1	5/8	16
J Flush pre-finished toe kick recess depth 1	13/16 - 3 1/8	20 - 80
Custom toe kick bracket recess depth 2**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	15 11/16	398
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer	20 3/4	527
O Depth of door panel	11/16	18
P Height of door panels	28 1/4	717
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick panel

Minimum Clearances	inch	mm
Minimum inside height of cavity*	32 9/32	820
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 1/16	560
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet





\*\*Including 3/4" (19mm) door panels on adjacent cabinetry

NOTE: Custom door panel and toe kicks to be manufactured/fitted by cabinetmaker.

INDICATES PRODUCT DATUM

INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

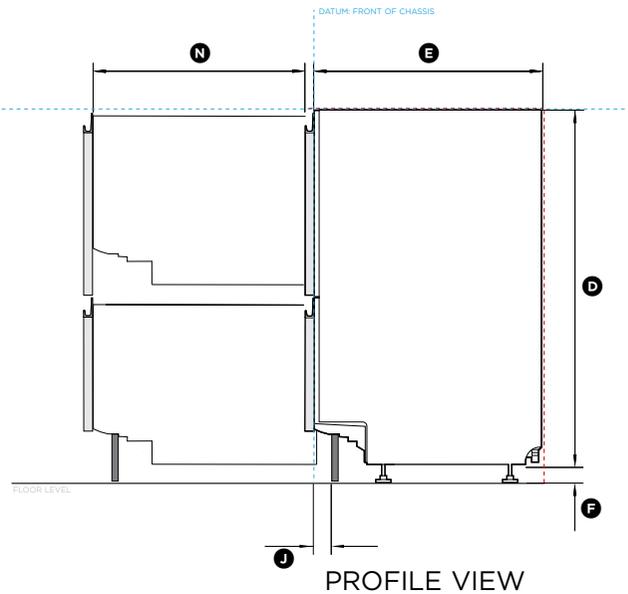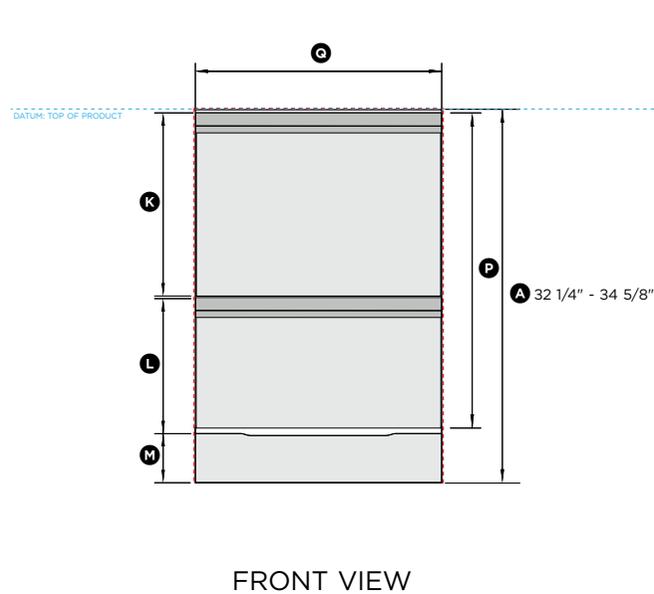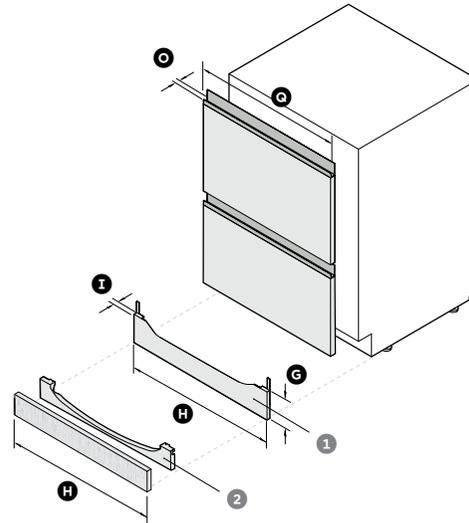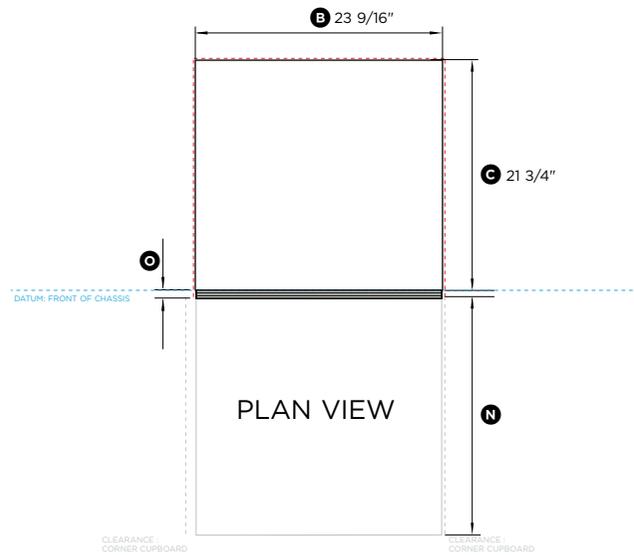

Model nos:

**DD24D19 N & DD24DH19 N**

Shown with Recessed Handle Stainless Steel Panels, ADDD24DNX

**Product includes the following Toe Kicks:**

- 1 Flush Pre-Finished Toe Kick
- 2 Custom Toe Kick bracket

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	32 1/4 - 34 5/8	820 - 880
B Overall width of product	23 9/16	599
C Overall depth of product (without door panel)	21 3/4	553
D Height of chassis	31 15/16	811
E Depth of chassis**	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Flush pre-finished toe kick panel height (customisable) 2	5	127
H Toe kick panel width	23 7/15	596
I Flush pre-finished toe kick panel depth 1	5/8	16
J Flush pre-finished toe kick recess depth 1	13/16 - 3 1/8	20 - 80
Custom toe kick bracket recess depth 2**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	15 11/16	398
L Height of lower door panel	12 3/16	309
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer	20 3/4	527
O Depth of door panel	13/16	20
P Height of door panels	28 1/4	717
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick panel

\*\*\*Max. 9/16" bench overhang recommended





Minimum Clearances	inch	mm
Minimum inside height of cavity*	32 9/32	820
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 1/16	560
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry

INDICATES PRODUCT DATUM -----  
 INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

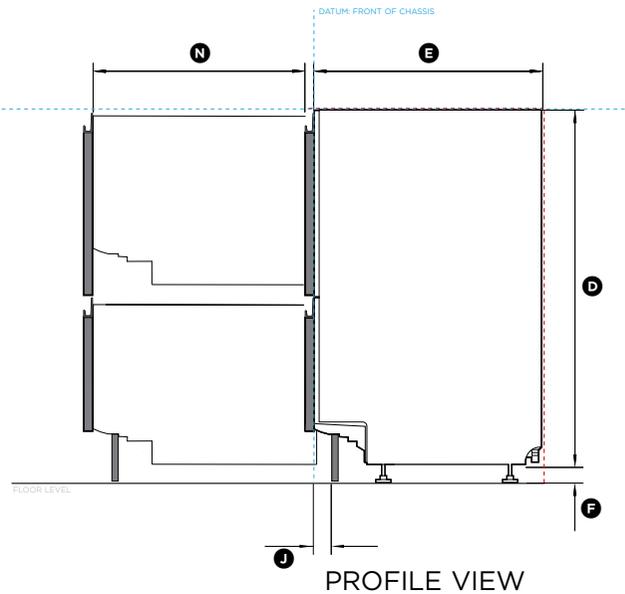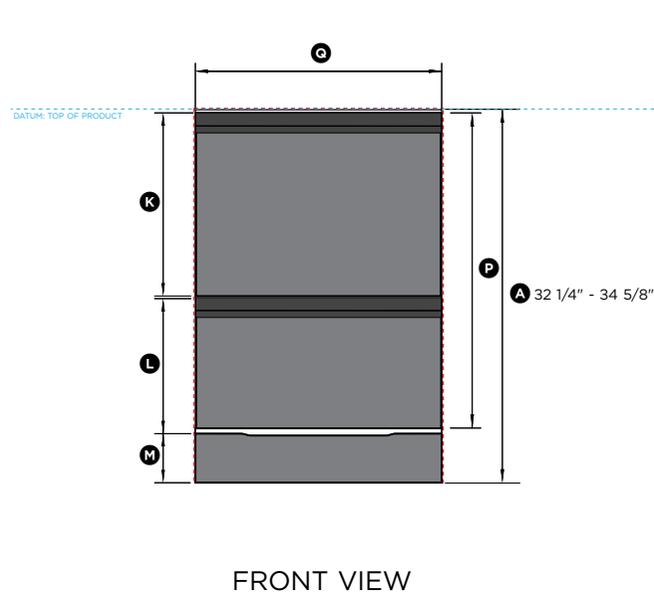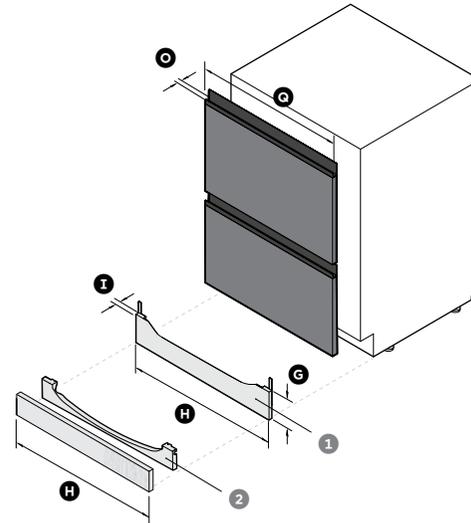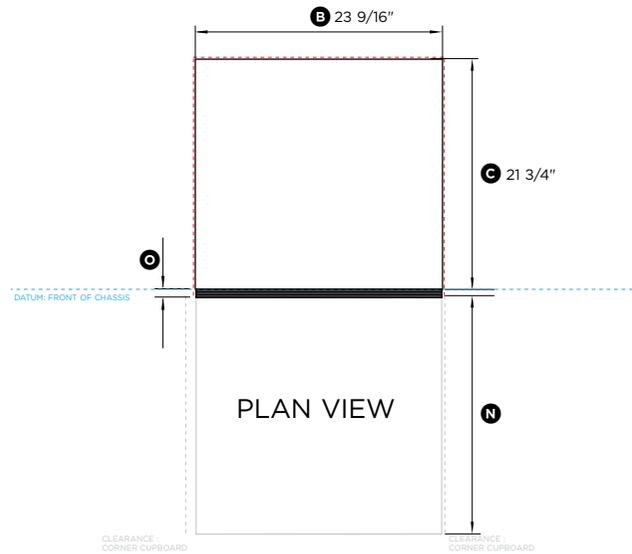

Model nos:

**DD24D19 N & DD24DHI9 N**

Shown with Recessed Handle Matte Black Glass Panels, ADDD24DZB

**Product includes the following Toe Kicks:**

- 1 Flush Pre-Finished Toe Kick
- 2 Custom Toe Kick bracket

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	32 1/4 - 34 5/8	820 - 880
B Overall width of product	23 9/16	599
C Overall depth of product (without door panel)	21 3/4	553
D Height of chassis	31 15/16	811
E Depth of chassis***	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Flush pre-finished toe kick panel height (customisable) 2	5	127
H Toe kick panel width	23 7/15	596
I Flush pre-finished toe kick panel depth 1	5/8	16
J Flush pre-finished toe kick recess depth 1	13/16 - 3 1/8	20 - 80
Custom toe kick bracket recess depth 2**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	15 11/16	398
L Height of lower door panel	12 3/16	309
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer	20 3/4	527
O Depth of door panel	13/16	20
P Height of door panels	28 1/4	717
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick panel

\*\*\*Max. 9/16" bench overhang recommended

Minimum Clearances	inch	mm
Minimum inside height of cavity*	32 9/32	820
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 1/16	560
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2


\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry



INDICATES PRODUCT DATUM -----  
 INDICATES CABINETRY CLEARANCES -----

**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

1 FLUSH PRE-FINISHED TOE KICK

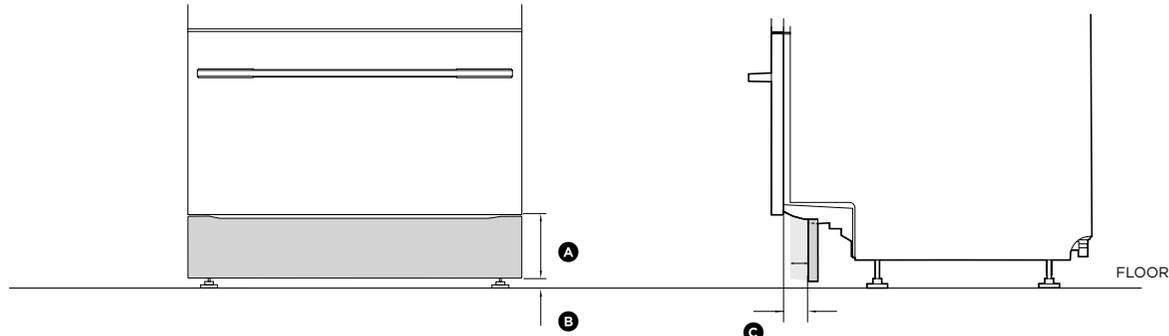

2 CUSTOM TOE KICK BRACKET

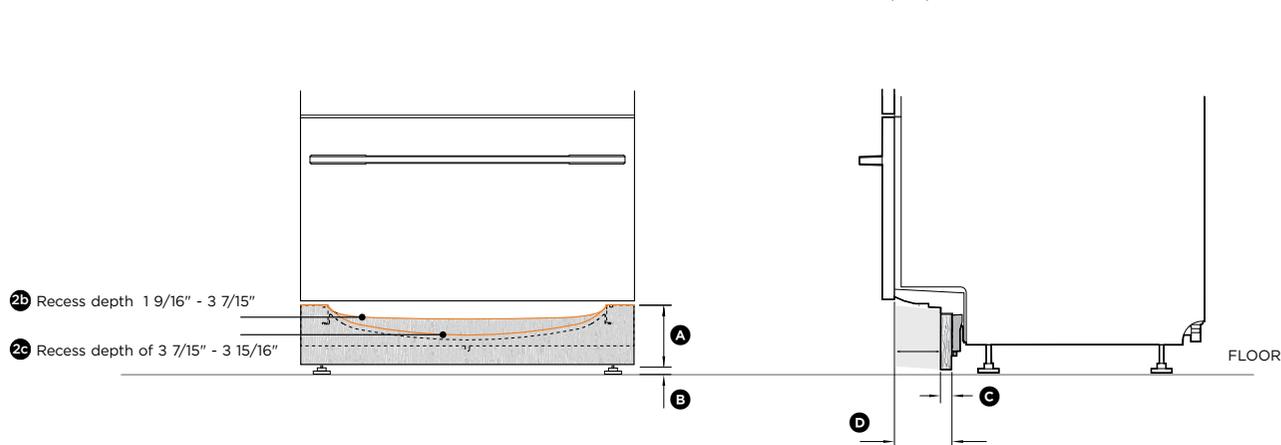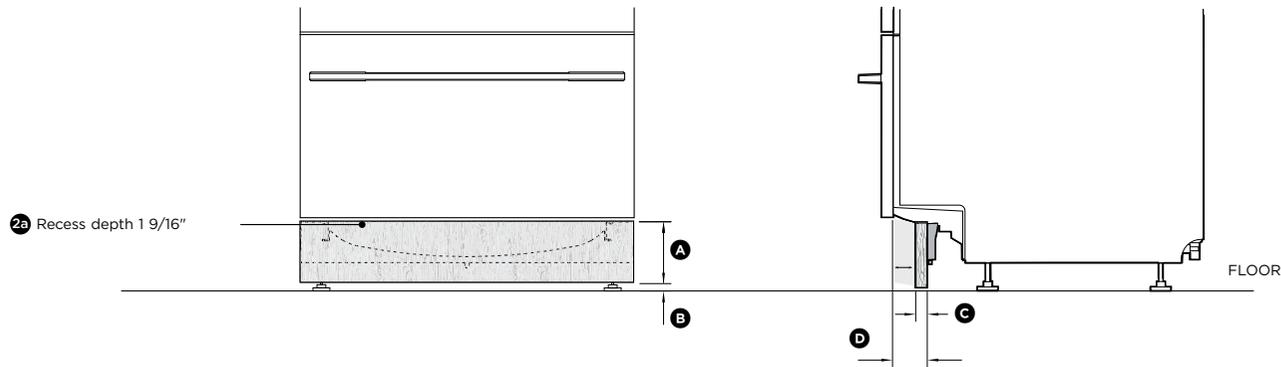

FRONT VIEW

SIDE VIEW

Model no:  
**DD24D19 N & DD24DH19 N**  
 Shown with Stainless Steel Door Panels ADDD24DPX

1 Flush Pre-Finished Toe Kick Depth Consideration	inch	mm
A Toe kick panel height*	2 1/4 - 4 5/8	58 - 118
B Minimum clearance between toe kick panel and floor	1/2	12
C Depth of toe kick recess	13/16 - 3 1/8	20 - 80

2a Custom toe kick panel (recess depth 15 3/4")	inch	mm
A Toe kick panel height	2 1/4 - 4 5/8	58 - 118
B Minimum clearance between toe kick panel and floor	1/2	12
C Minimum toe kick panel depth (thickness)**	3/8	9
D Depth of toe kick recess***	1 9/16	40

2b Custom toe kick panel (recess depth 1 9/16" - 3 7/15")	inch	mm
A Toe kick panel height*	2 1/4 - 4 5/8	58 - 118
B Minimum clearance between toe kick panel and floor	1/2	12
C Minimum toe kick panel depth (thickness)**	3/8	9
D Depth of toe kick recess***	1 9/16 - 3 7/15	40 - 88





2c Custom toe kick panel (recess depth 3 7/15" - 3 15/16")	inch	mm
A Toe kick panel height*	2 1/4 - 4 5/8	58 - 118
B Minimum clearance between toe kick panel and floor	1/2	12
C Minimum toe kick panel depth (thickness)**	3/8	9
D Depth of toe kick recess***	3 7/15 - 3 15/16	88 - 100

\*Toe kick panel should be adjusted accordingly  
 \*\*If using supplied toe kick mounting screws. Panel can be fixed via screwing or gluing to the supplied mounting bracket  
 \*\*\*Excluding custom panel and handle

NOTE: For full installation and clearance details please refer to the installation guide.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

**DATA SHEETS**  
**DD24DTI9 N**

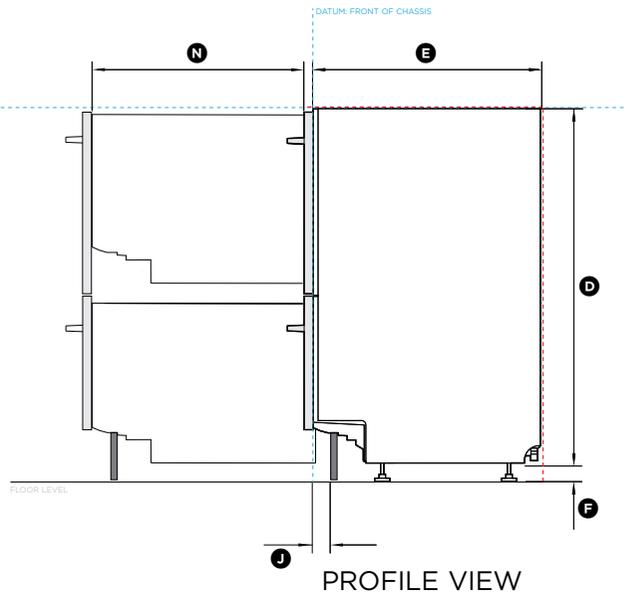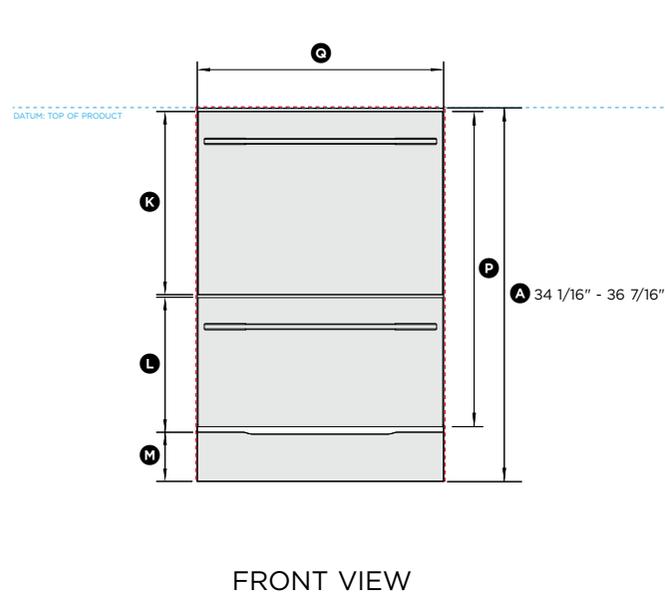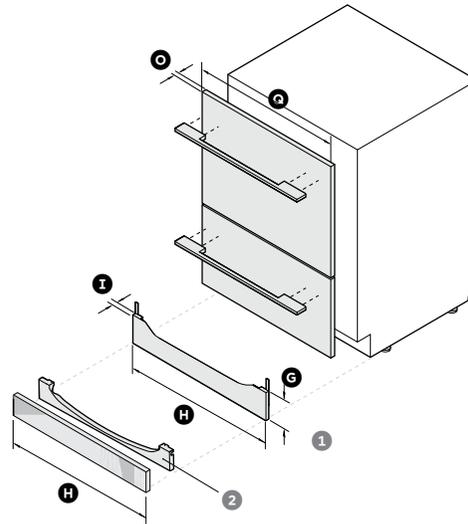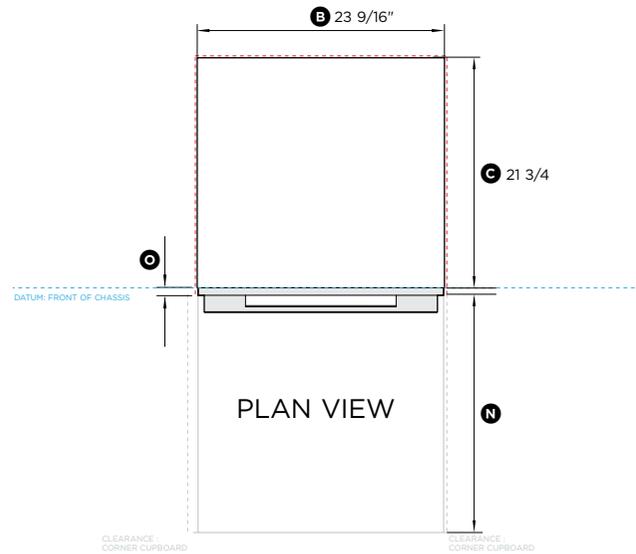

Model nos:

**DD24DT19 N**

Shown with Stainless Steel Door Panels, ADDD24DTPX  
Shown with Contemporary Square Fine Handle, AHD50BDD605X

**Product includes the following Toe Kicks:**

- 1 Flush Pre-Finished Toe Kick
- 2 Custom Toe Kick bracket

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	34 1/16 - 36 7/16	865 - 925
B Overall width of product	23 9/16	599
C Overall depth of product(without handle and door panel)	21 3/4	553
D Height of chassis	33 11/16	855
E Depth of chassis	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Flush pre-finished toe kick height 1	1 3/4 - 4 13/16	45 - 123
Custom toe kick bracket height 2	1 3/4 - 4 13/16	45 - 123
H Toe kick panel width	23 7/15	596
I Flush pre-finished toe kick panel depth 1	5/8	16
J Flush pre-finished toe kick recess depth 1	13/16 - 3 1/8	20 - 80
Custom toe kick bracket recess depth 2**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	17 13/32	442
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer**	20 3/4	527
O Depth of door panel	11/16	18
P Height of door panels	29 31/32	761
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick





Minimum Clearances	inch	mm
Minimum inside height of cavity*	34 1/16	865
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry


INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

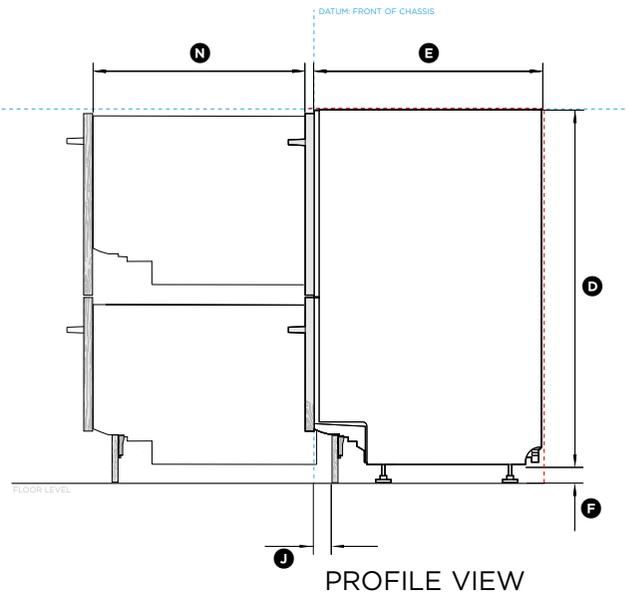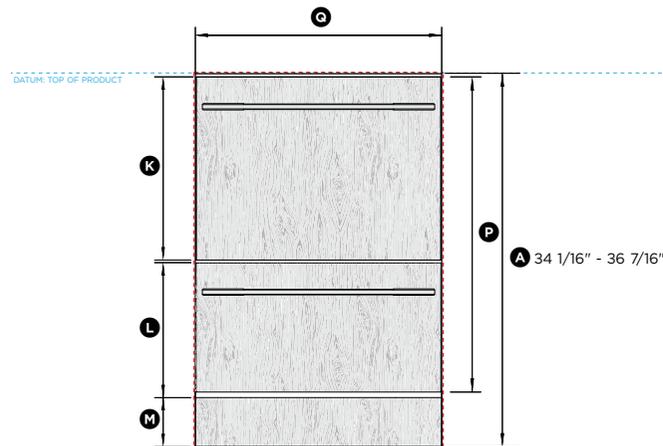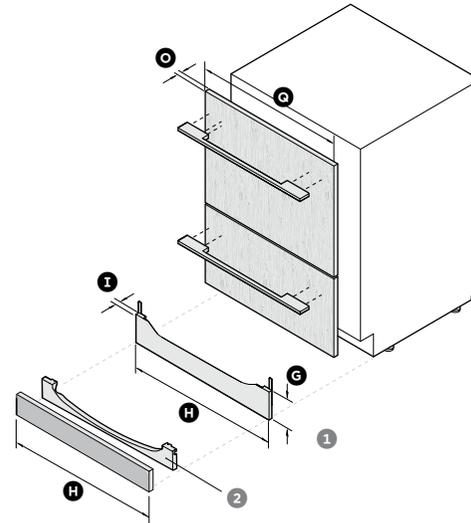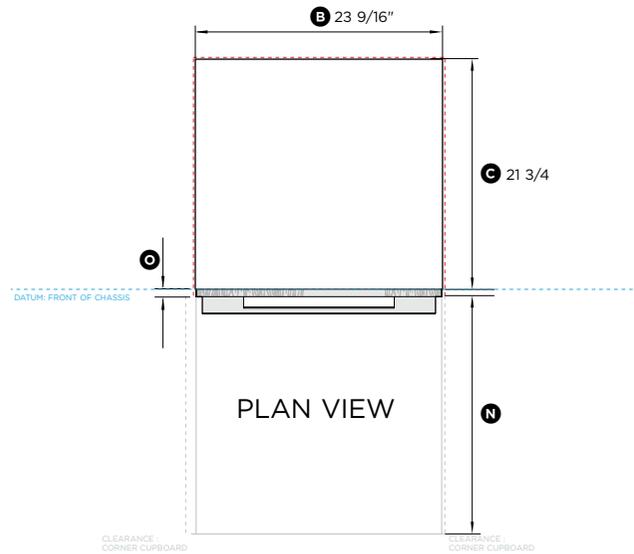

FRONT VIEW

PROFILE VIEW



Model nos:

**DD24DT19 N**

Shown with Custom Door Panels

Shown with Contemporary Square Fine Handle, AHD5OBDD605X

**Product includes the following Toe Kicks:**

- 1 Flush Pre-Finished Toe Kick
- 2 Custom Toe Kick bracket

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	34 1/16 - 36 7/16	865 - 925
B Overall width of product	23 9/16	599
C Overall depth of product(without handle and door panel)	21 3/4	553
D Height of chassis	33 11/16	855
E Depth of chassis	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Flush pre-finished toe kick height 1	1 3/4 - 4 13/16	45 - 123
Custom toe kick bracket height 2	1 3/4 - 4 13/16	45 - 123
H Toe kick panel width	23 7/15	596
I Flush pre-finished toe kick panel depth 1	5/8	16
J Flush pre-finished toe kick recess depth 1	13/16 - 3 1/8	20 - 80
Custom toe kick bracket recess depth 2**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	17 13/32	442
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer**	20 3/4	527
O Depth of door panel	11/16	18
P Height of door panels	29 31/32	761
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick

Minimum Clearances	inch	mm
Minimum inside height of cavity*	34 1/16	865
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2





\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry

NOTE: Custom door panel and toe kicks to be manufactured/fitted by cabinetmaker.

INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

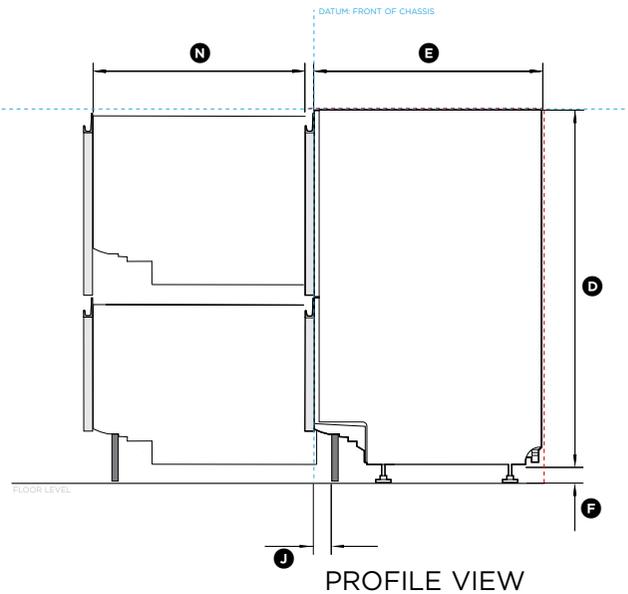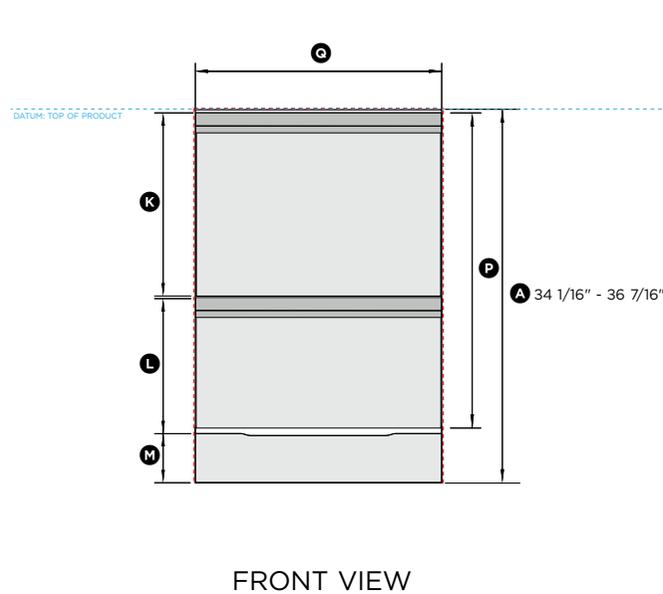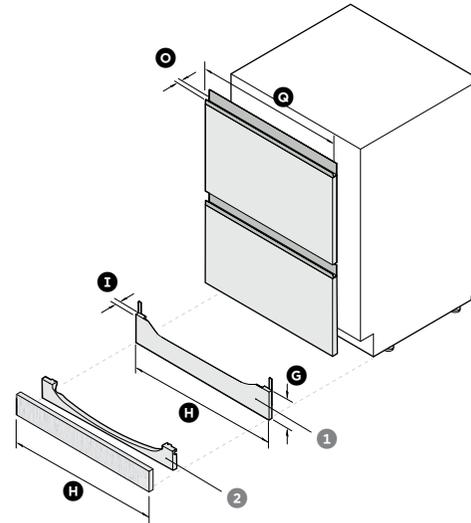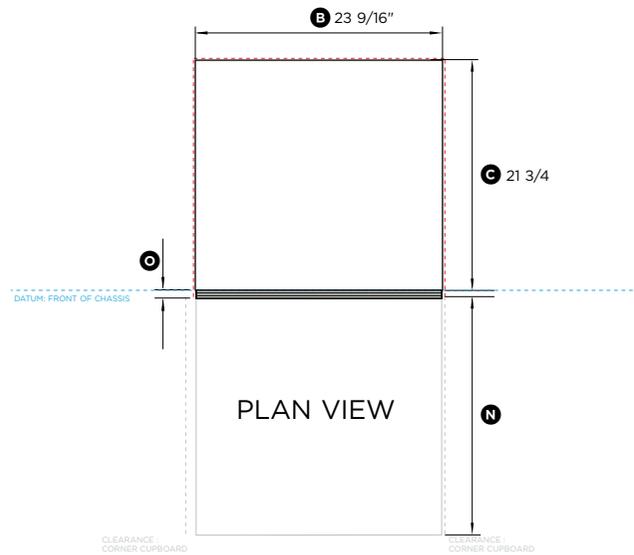

Model nos:  
**DD24DT19 N**  
 Shown with Recessed Handle Stainless Steel Panels, ADDD24DTNX

**Product includes the following Toe Kicks:**

- 1 Flush Pre-Finished Toe Kick
- 2 Custom Toe Kick bracket

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	34 1/16 - 36 7/16	865 - 925
B Overall width of product	23 9/16	599
C Overall depth of product (without door panel)	21 3/4	553
D Height of chassis	33 11/16	855
E Depth of chassis***	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Flush pre-finished toe kick panel height 1	5	127
Custom toe kick bracket height 2	1 3/4 - 4 13/16	45 - 123
H Toe kick panel width	23 7/15	596
I Flush pre-finished toe kick panel depth 1	5/8	16
J Flush pre-finished toe kick recess depth 1	13/16 - 3 1/8	20 - 80
Custom toe kick bracket recess depth 2**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	17 13/32	442
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer**	20 3/4	527
O Depth of door panel	13/16	20
P Height of door panels	29 31/32	761
Q Door panel width	23 7/16	595





\*Depending on adjustment of levelling feet  
 \*\*Excluding custom toe kick  
 \*\*\*Max. 9/16" (15mm) bench overhang recommended

Minimum Clearances	inch	mm
Minimum inside height of cavity*	34 1/16	865
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet  
 \*\*Including 3/4" (19mm) door panels on adjacent cabinetry

INDICATES PRODUCT DATUM -----  
 INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

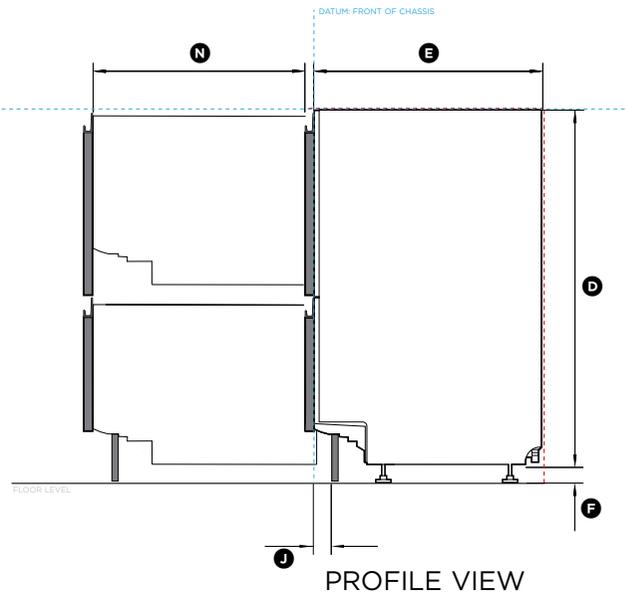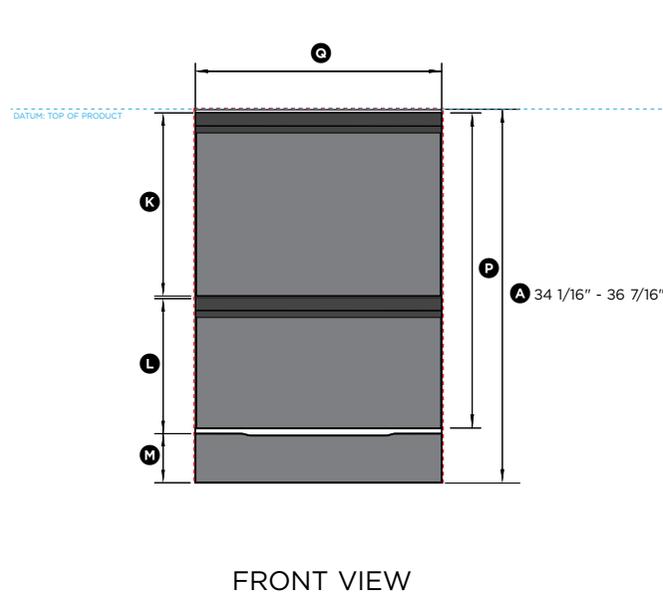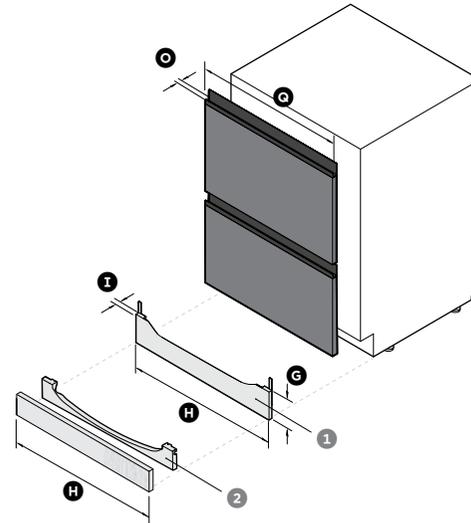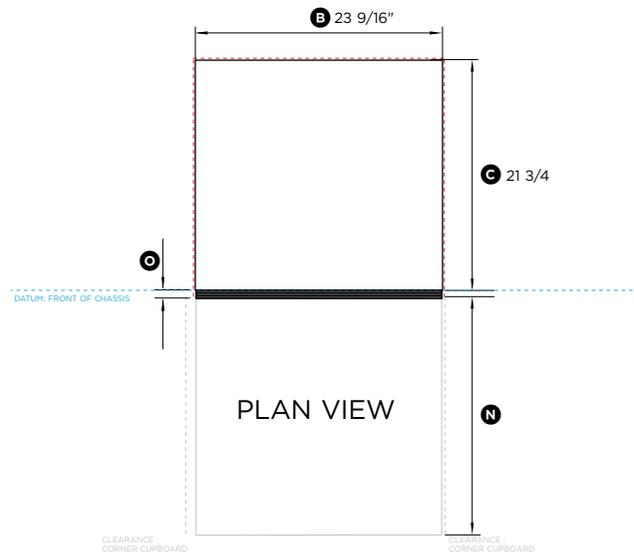

Model nos:  
**DD24DT19**  
 Shown with Recessed Handle Matte Black Glass Panels, ADDD24DTZB

**Product includes the following Toe Kicks:**

- 1 Flush Pre-Finished Toe Kick
- 2 Custom Toe Kick bracket

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	34 1/16 - 36 7/16	865 - 925
B Overall width of product	23 9/16	599
C Overall depth of product (without door panel)	21 3/4	553
D Height of chassis	33 11/16	855
E Depth of chassis***	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Flush pre-finished toe kick panel height 1	5	127
Custom toe kick bracket height 2	1 3/4 - 4 13/16	45 - 123
H Toe kick panel width	23 7/15	596
I Flush pre-finished toe kick panel depth 1	5/8	16
J Flush pre-finished toe kick recess depth 1	13/16 - 3 1/8	20 - 80
Custom toe kick bracket recess depth 2**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	17 13/32	442
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer**	20 3/4	527
O Depth of door panel	13/16	20
P Height of door panels	29 31/32	761
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet  
 \*\*Excluding custom toe kick  
 \*\*\*Max. 9/16" (15mm) bench overhang recommended


Minimum Clearances	inch	mm
Minimum inside height of cavity*	34 1/16	865
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet  
 \*\*Including 3/4" (19mm) door panels on adjacent cabinetry


INDICATES PRODUCT DATUM -----  
 INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

1 FLUSH PRE-FINISHED TOE KICK

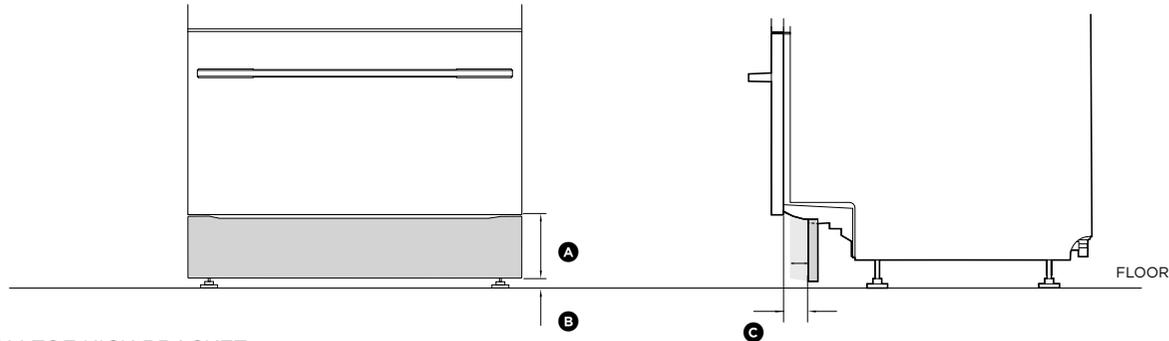

2 CUSTOM TOE KICK BRACKET

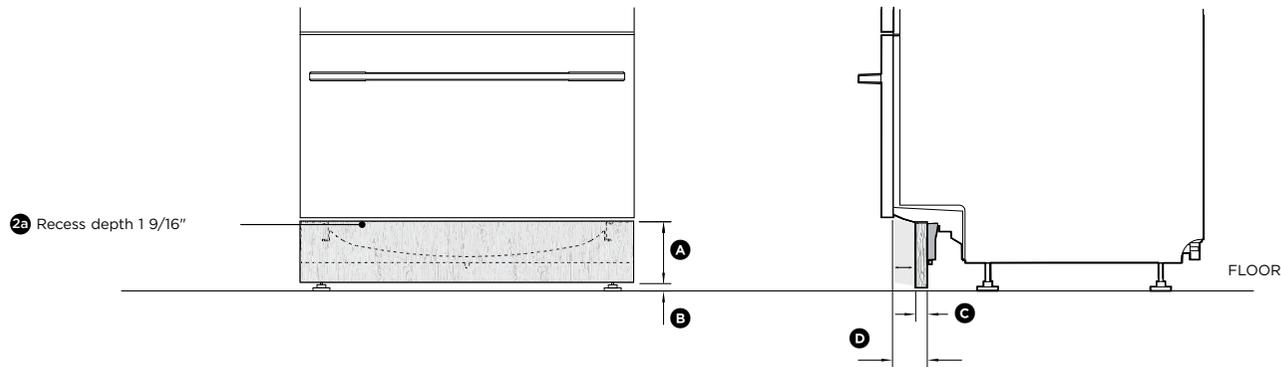

2a Recess depth 1 9/16"

2b Recess depth 1 9/16" - 3 7/15"

2c Recess depth of 3 7/15" - 3 15/16"

FRONT VIEW

SIDE VIEW

Model no:  
**DD24DT19 N**  
 Shown with Stainless Steel Door Panels ADDD24DPX

1 Flush Pre-Finished Toe Kick Depth Consideration	inch	mm
A Toe kick panel height*	2 1/4 - 4 5/8	58 - 118
B Minimum clearance between toe kick panel and floor	1/2	12
C Depth of toe kick recess	13/16 - 3 1/8	20 - 80

2a Custom toe kick panel (recess depth 15 3/4")	inch	mm
A Toe kick panel height	2 1/4 - 4 5/8	58 - 118
B Minimum clearance between toe kick panel and floor	1/2	12
C Minimum toe kick panel depth (thickness)**	3/8	9
D Depth of toe kick recess***	1 9/16	40

2b Custom toe kick panel (recess depth 1 9/16" - 3 7/15")	inch	mm
A Toe kick panel height*	2 1/4 - 4 5/8	58 - 118
B Minimum clearance between toe kick panel and floor	1/2	12
C Minimum toe kick panel depth (thickness)**	3/8	9
D Depth of toe kick recess***	1 9/16 - 3 7/15	40 - 88





2c Custom toe kick panel (recess depth 3 7/15" - 3 15/16")	inch	mm
A Toe kick panel height*	2 1/4 - 4 5/8	58 - 118
B Minimum clearance between toe kick panel and floor	1/2	12
C Minimum toe kick panel depth (thickness)**	3/8	9
D Depth of toe kick recess***	3 7/15 - 3 15/16	88 - 100

\*Toe kick panel should be adjusted accordingly  
 \*\*If using supplied toe kick mounting screws. Panel can be fixed via screwing or gluing to the supplied mounting bracket  
 \*\*\*Excluding custom panel and handle

NOTE: For full installation and clearance details please refer to the installation guide.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

**DATA SHEETS**  
**DD24DTX6I1 & DD24DTX6IH1**

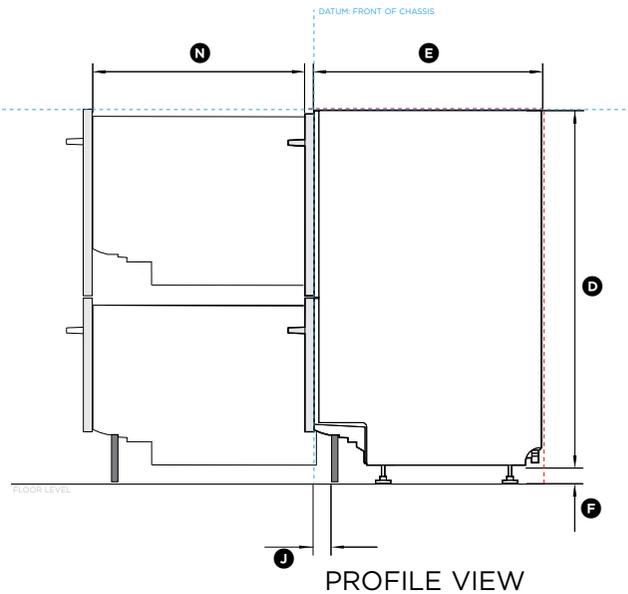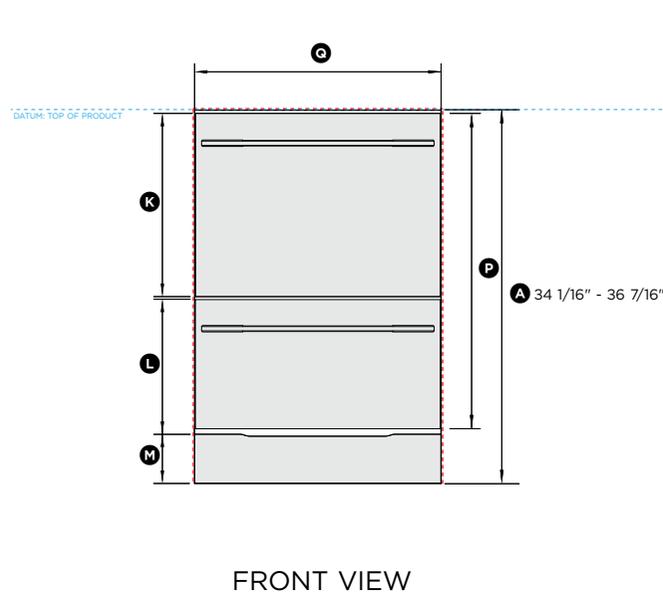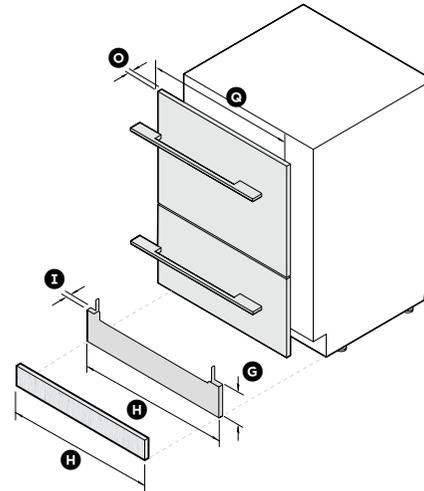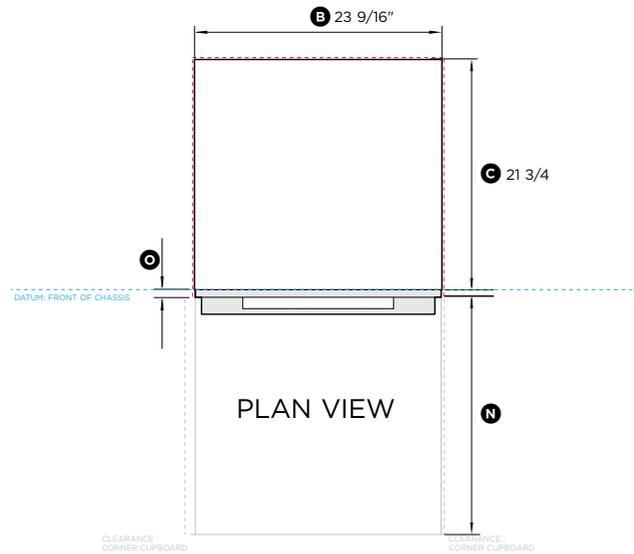

Model nos:

**DD24DTX6I1 & DD24DTX6H11**

Shown with Stainless Steel Door Panels, ADDD24DTPX

Shown with Contemporary Square Fine Handle, AHD5OBDD60SX

**Product includes the following Toe Kicks:**

Recessed Pre-Finished Toe Kick (also used as a custom toe kick bracket)

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	34 1/16 - 36 7/16	865 - 925
B Overall width of product	23 9/16	599
C Overall depth of product(without handle and door panel)	21 3/4	553
D Height of chassis	33 11/16	855
E Depth of chassis	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Recessed pre-finished toe kick height	1 3/4 - 4 13/16	45 - 123
H Toe kick panel width	23 7/15	596
I Recessed pre-finished toe kick panel depth	5/8	16
J Recessed pre-finished toe kick depth**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	17 13/32	442
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer**	20 3/4	527
O Depth of door panel	11/16	18
P Height of door panels	29 31/32	761
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick panel





Minimum Clearances	inch	mm
Minimum inside height of cavity*	34 1/16	865
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry

INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

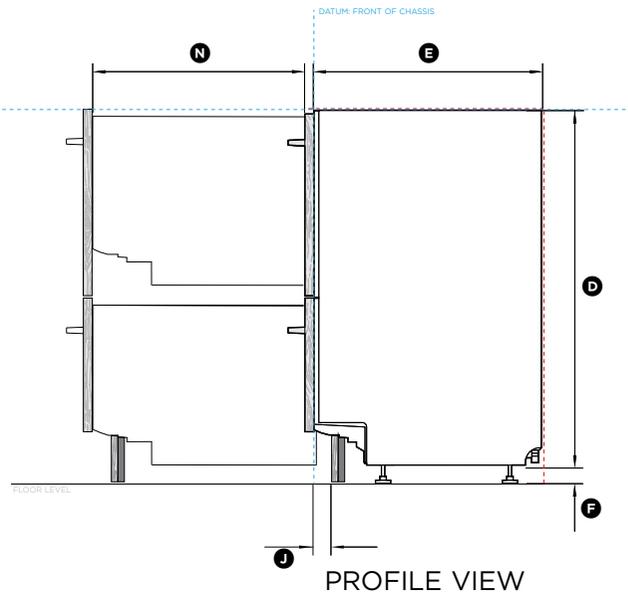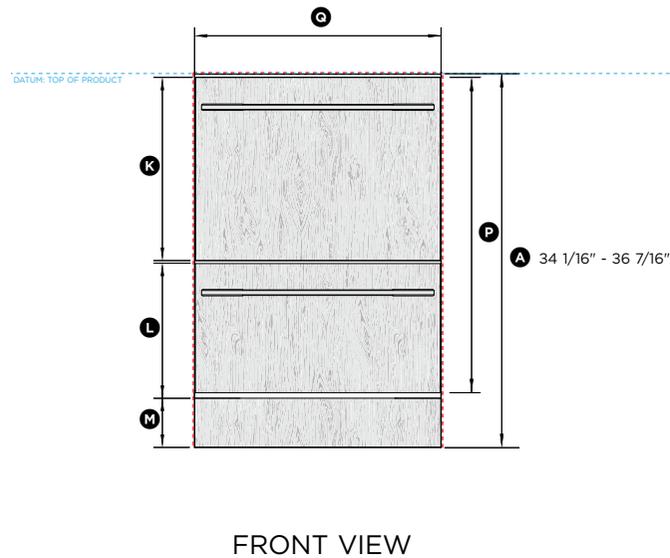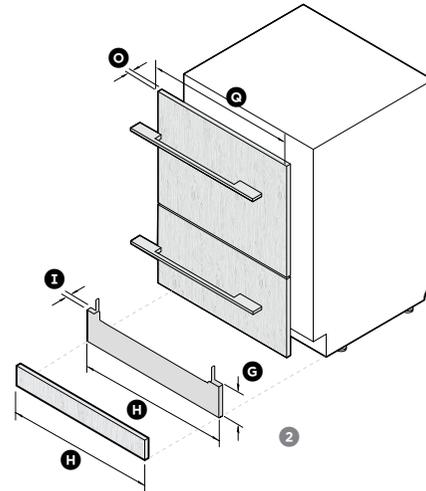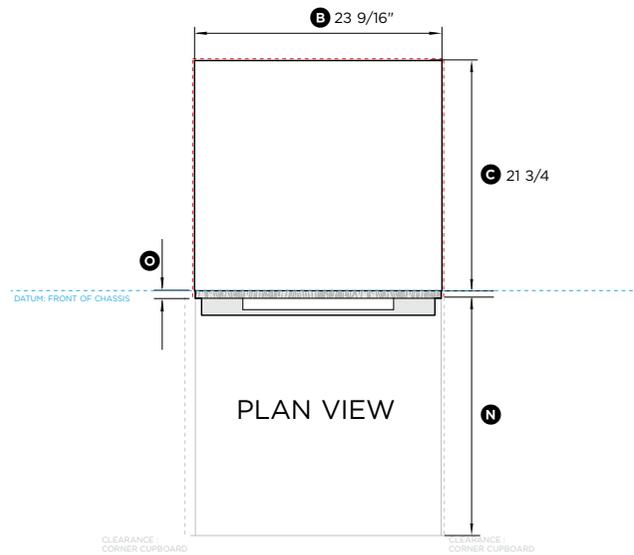

Model nos:

**DD24DTX6I1 & DD24DTX6H11**

Shown with Custom Door Panels

Shown with Contemporary Square Fine Handle, AHD5OBDD60SX

**Product includes the following Toe Kicks:**

Recessed Pre-Finished Toe Kick (also used as a custom toe kick bracket)

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	34 1/16 - 36 7/16	865 - 925
B Overall width of product	23 9/16	599
C Overall depth of product(without handle and door panel)	21 3/4	553
D Height of chassis	33 11/16	855
E Depth of chassis	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Recessed pre-finished toe kick height	1 3/4 - 4 13/16	45 - 123
H Toe kick panel width	23 7/15	596
I Recessed pre-finished toe kick panel depth	5/8	16
J Recessed pre-finished toe kick depth**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	17 13/32	442
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer**	20 3/4	527
O Depth of door panel	11/16	18
P Height of door panels	29 31/32	761
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick panel





Minimum Clearances	inch	mm
Minimum inside height of cavity*	34 1/16	865
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry

INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

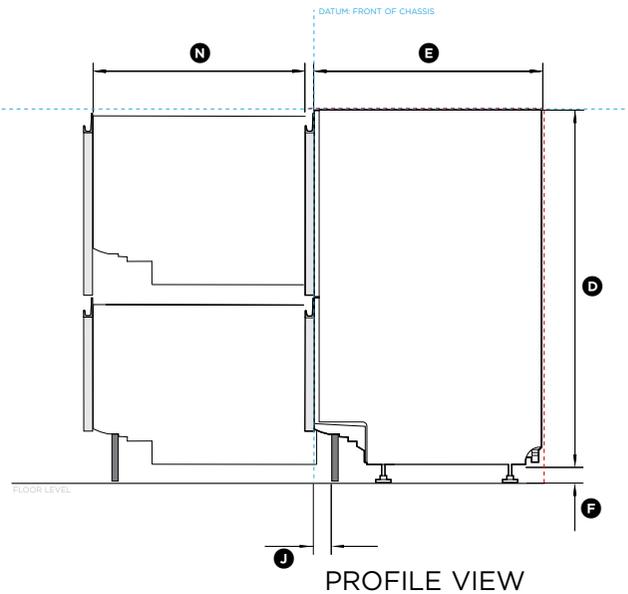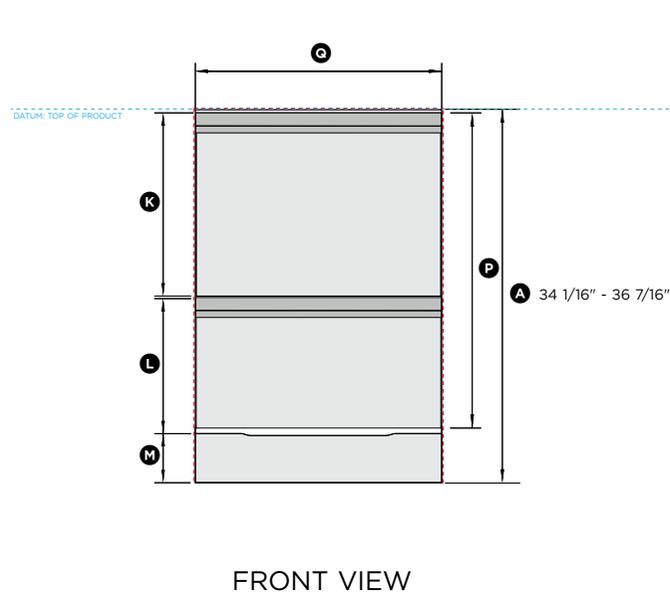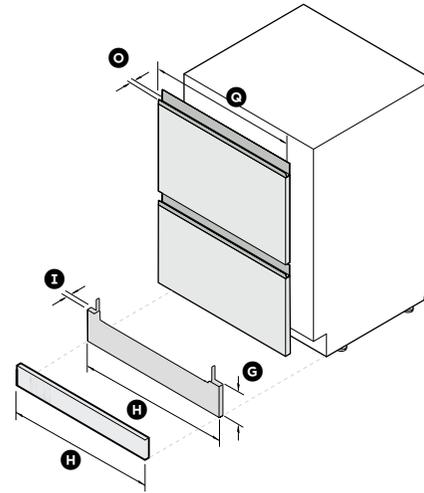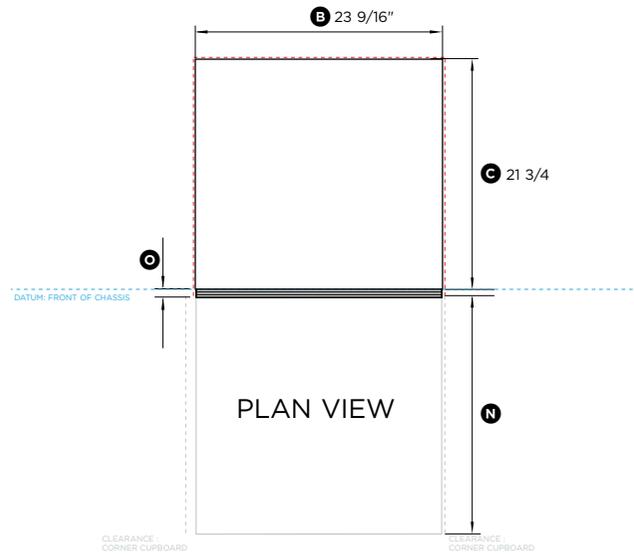

Model nos:

**DD24DTX6I1 & DD24DTX6H11**

Shown with Recessed Handle Stainless Steel Panels, ADD24DTNX

**Product includes the following Toe Kicks:**

Recessed Pre-Finished Toe Kick (also used as a custom toe kick bracket)

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
A Overall height of product*	34 1/16 - 36 7/16	865 - 925
B Overall width of product	23 9/16	599
C Overall depth of product (without door panel)	21 3/4	553
D Height of chassis	33 11/16	855
E Depth of chassis***	21 3/4	553
F Height of feet*	3/8 - 2 3/4	10 - 70
G Recessed pre-finished toe kick height	1 3/4 - 4 13/16	45 - 123
H Toe kick panel width	23 7/15	596
I Recessed pre-finished toe kick panel depth	5/8	16
J Recessed pre-finished toe kick depth**	1 9/16 - 3 15/16	40 - 100
K Height of upper door panel	17 13/32	442
L Height of lower door panel	12 1/4	311
M Height of toe kick space	2 1/4 - 4 5/8	58 - 118
N Maximum extension of drawer**	20 3/4	527
O Depth of door panel	13/16	20
P Height of door panels	29 31/32	761
Q Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick

\*\*\*Max. 9/16" (15mm) bench overhang recommended





Minimum Clearances	inch	mm
Minimum inside height of cavity*	34 1/16	865
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2

\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry

INDICATES PRODUCT DATUM -----  
 INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

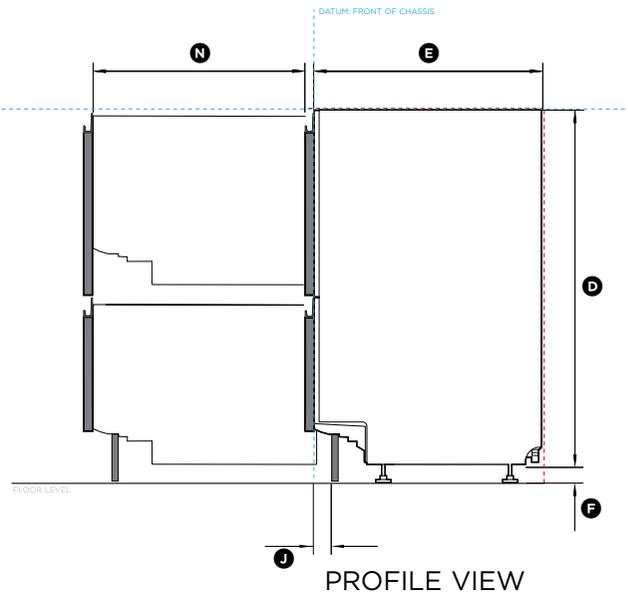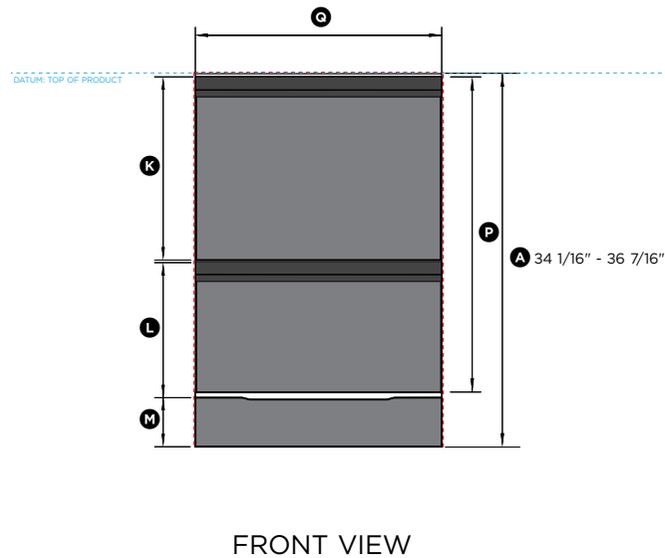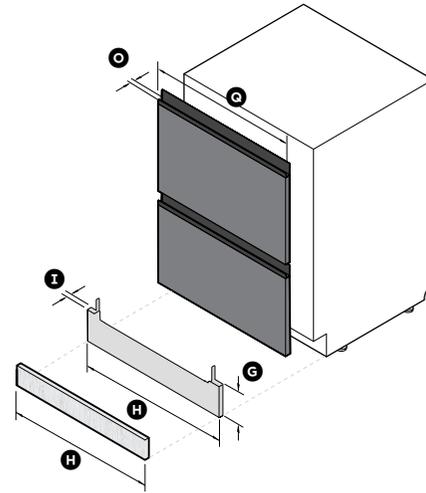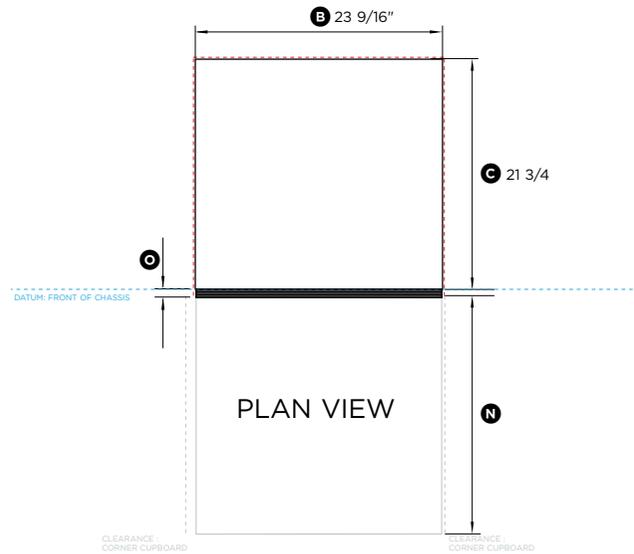

Model nos:

**DD24DTX6I1 & DD24DTX6H11**

Shown with Recessed Handle Matte Black Glass Panels, ADDD24DTZB

**Product includes the following Toe Kicks:**

Recessed Pre-Finished Toe Kick (also used as a custom toe kick bracket)

NOTE: Refer to page 4 - Design Choices for all door panel and handle options

Product Dimensions	inch	mm
<b>A</b> Overall height of product*	34 1/16 - 36 7/16	865 - 925
<b>B</b> Overall width of product	23 9/16	599
<b>C</b> Overall depth of product (without door panel)	21 3/4	553
<b>D</b> Height of chassis	33 11/16	855
<b>E</b> Depth of chassis***	21 3/4	553
<b>F</b> Height of feet*	3/8 - 2 3/4	10 - 70
<b>G</b> Recessed pre-finished toe kick height	1 3/4 - 4 13/16	45 - 123
<b>H</b> Toe kick panel width	23 7/15	596
<b>I</b> Recessed pre-finished toe kick panel depth	5/8	16
<b>J</b> Recessed pre-finished toe kick depth**	1 9/16 - 3 15/16	40 - 100
<b>K</b> Height of upper door panel	17 13/32	442
<b>L</b> Height of lower door panel	12 1/4	311
<b>M</b> Height of toe kick space	2 1/4 - 4 5/8	58 - 118
<b>N</b> Maximum extension of drawer**	20 3/4	527
<b>O</b> Depth of door panel	13/16	20
<b>P</b> Height of door panels	29 31/32	761
<b>Q</b> Door panel width	23 7/16	595

\*Depending on adjustment of levelling feet

\*\*Excluding custom toe kick

\*\*\*Max. 9/16" (15mm) bench overhang recommended

Minimum Clearances	inch	mm
Minimum inside height of cavity*	34 1/16	865
Minimum inside width of cavity	23 5/8	600
Minimum overall depth of cavity**	22 3/4	578
Minimum clearance to corner cupboard	1/2	13
Minimum clearance to adjacent cupboard door	1/16	2


\*Depending on adjustment of levelling feet

\*\*Including 3/4" (19mm) door panels on adjacent cabinetry


INDICATES PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

RECESSED PRE-FINISHED TOE KICK

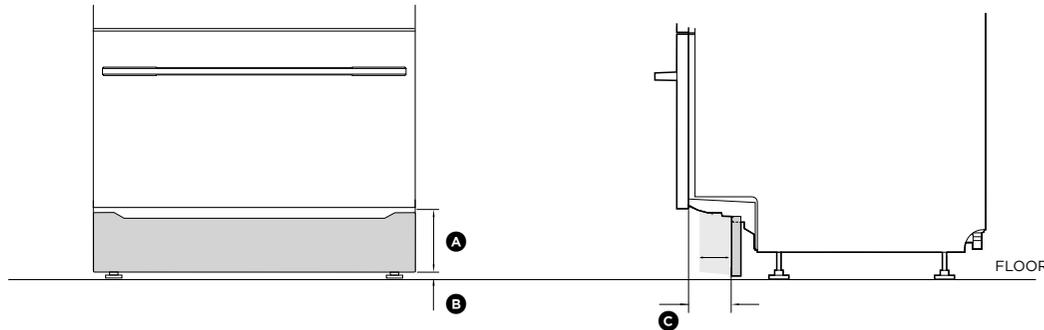

RECESSED PRE-FINISHED TOE KICK WITH CUSTOM TOE KICK PANEL

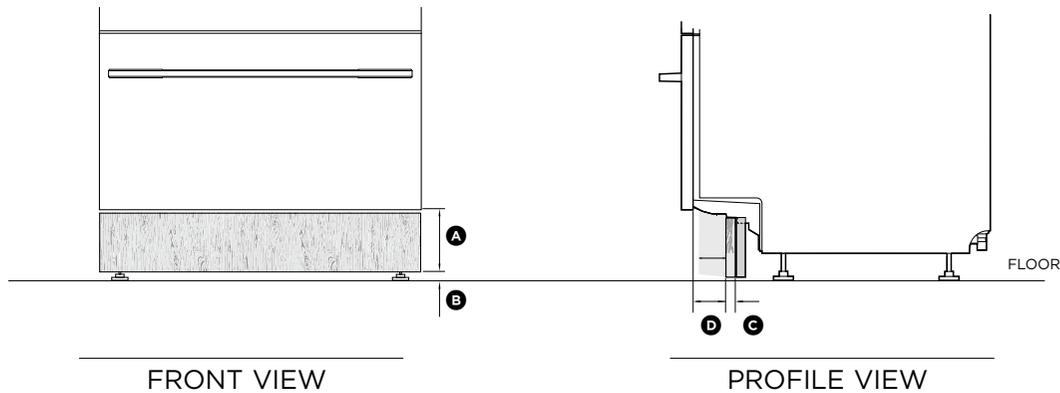

FRONT VIEW

PROFILE VIEW

Model no:

**DD24DTX6I1 & DD24DTX6H11**

Recessed Pre-Finished Toe Kick Depth		inch	mm
Ⓐ	Toe kick panel height	1 3/4 - 4 13/16	45 - 123
Ⓔ	Minimum clearance between toe kick panel and floor	1/2	12
Ⓒ	Depth of toe kick recess*	1 9/16 - 3 15/16	40 - 100

\*Back of door to front of toe kick


Recessed Pre-Finished Toe Kick Depth with Custom Toe Kick Panel		inch	mm
Ⓐ	Toe kick panel height	1 3/4 - 4 13/16	45 - 123
Ⓔ	Minimum clearance between toe kick panel and floor	1/2	12
Ⓒ	Minimum toe kick panel depth (thickness)	min 3/8	min 9
Ⓓ	Depth of toe kick recess*	13/16 - 3 3/16	21 - 81

\*Back of door to front of custom toe kick, assuming a 3/4" (19mm) thick custom toe kick panel is used

**NOTE:** For full installation and clearance details please refer to the installation guide.

**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

## HANDLE KITS

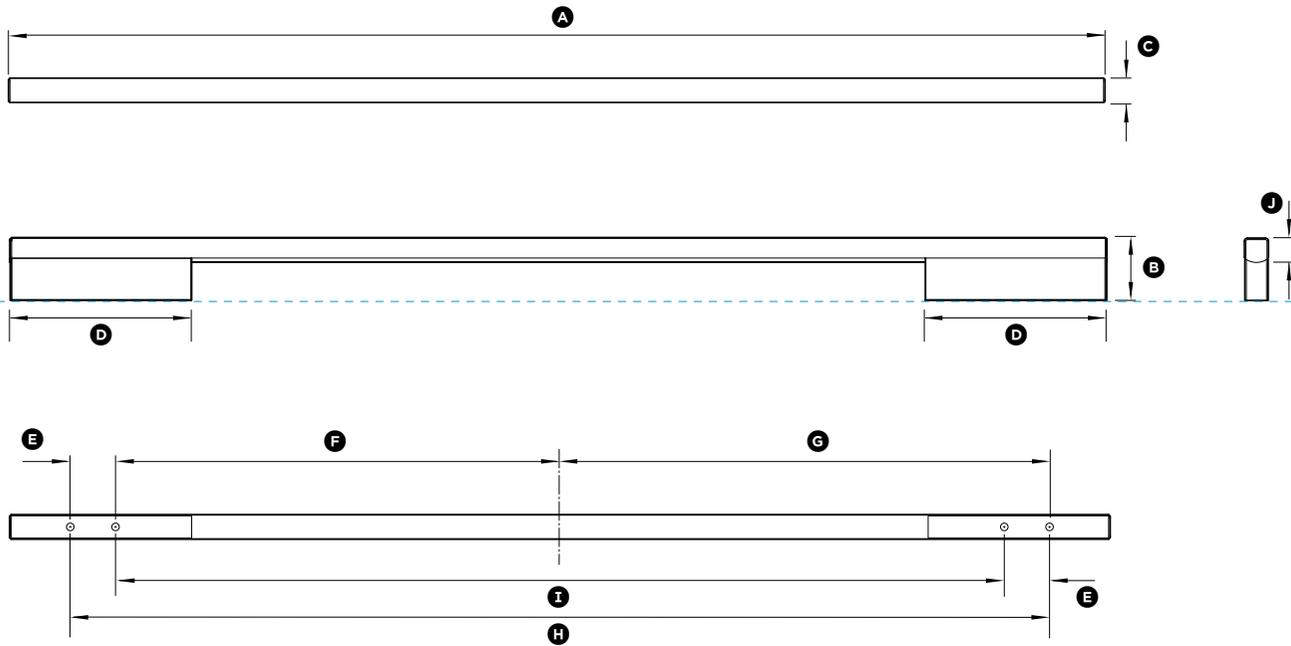

**Model no:**  
Square Handle **AHD30BDD60S**


**For Models:**  
DD24DI9 N, DD24DHI9 N, DD24DTI9 N, DD24DTX6II, DD24DTX6HII

**Compatible with door panel kits:**  
Square Handle for Door Panel Kits ADDD24DPX, ADDD24DTPX

Handle Dimensions	inch	mm
A Overall length of handle	22 1/4	565
B Overall depth of handle	1 5/8	41
C Overall height of handle	5/8	16
D Length of off-stand	3 15/16	100
E Distance between attachment holes between each off-stand	1 1/4	32
F Distance from centerline to inner attachment holes	8 1/2	216
G Distance from centerline to outer attachment holes	9 25/32	248.5
H Distance between inner attachment holes	17	432
I Distance between outer attachment holes	19 9/16	497
J Thickness of handle rail	5/8	16


\*DishDrawer Double - the dimensions are the same for both handles  
\*Suits standard 3/4" (19mm) panel. Thicker panels may require counterboring or longer screws

**Note:**  
Single DishDrawer requires one handle kit, double DishDrawer requires two handle kits

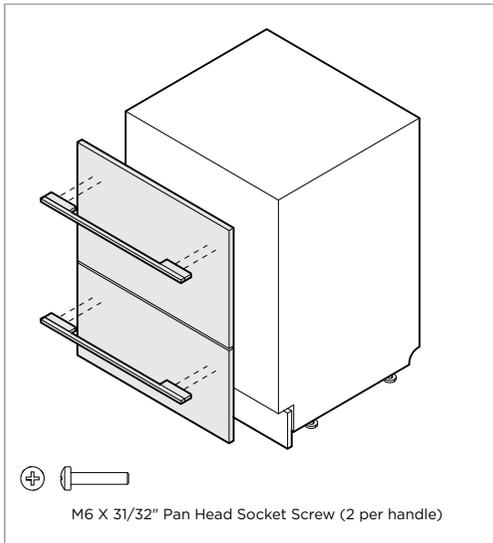

INDICATES PRODUCT DATUM -----

**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

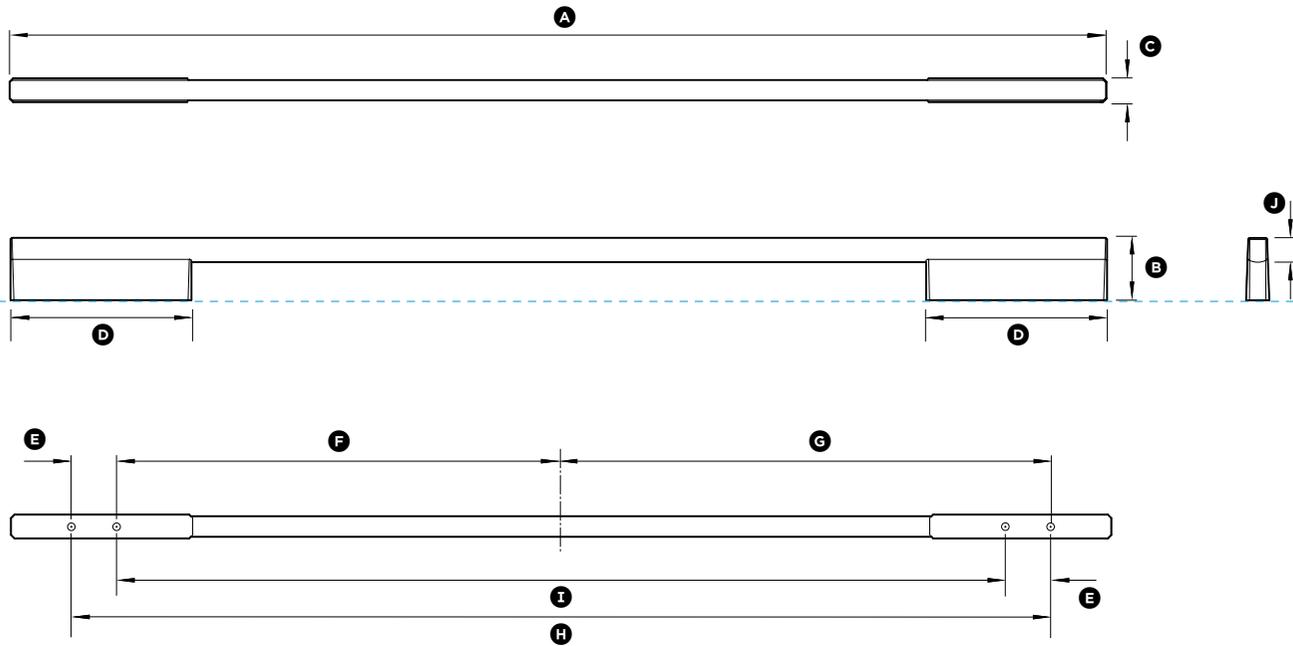

**Model no:**  
Square Fine Handle **AHD5OBDD60SX**


**For Models:**  
DD24DI9 N, DD24DH19 N, DD24DTI9 N, DD24DTX6II, DD24DTX6HII

**Compatible with door panel kits:**  
Square Fine Handle for Door Panel Kits ADDD24DPX, ADDD24DTPX


Handle Dimensions	inch	mm
A Overall length of handle	22 1/4	565
B Overall depth of handle	1 5/8	41
C Overall height of handle	19/32	15
D Length of off-stand	3 15/16	100
E Distance between attachment holes between each off-stand	1 1/4	32
F Distance from centerline to inner attachment holes	8 1/2	216
G Distance from centerline to outer attachment holes	9 25/32	248.5
H Distance between inner attachment holes	17	432
I Distance between outer attachment holes	19 9/16	497
J Thickness of handle rail	5/8	16

\*DishDrawer Double - the dimensions are the same for both handles  
\*Suits standard 3/4" (19mm) panel. Thicker panels may require counterboring or longer screws

**Note:**  
Single DishDrawer requires one handle kit, double DishDrawer requires two handle kits.

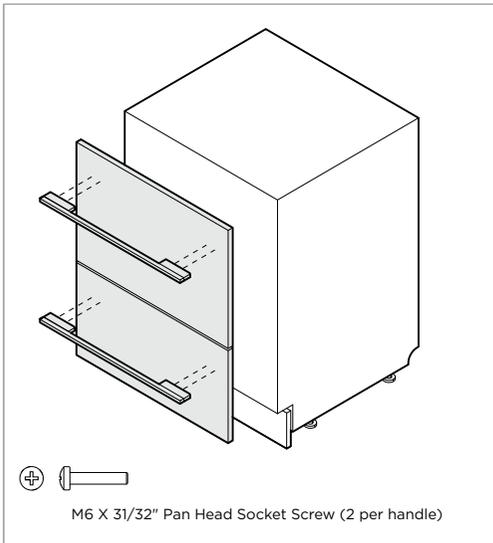

INDICATES PRODUCT DATUM -----  
**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

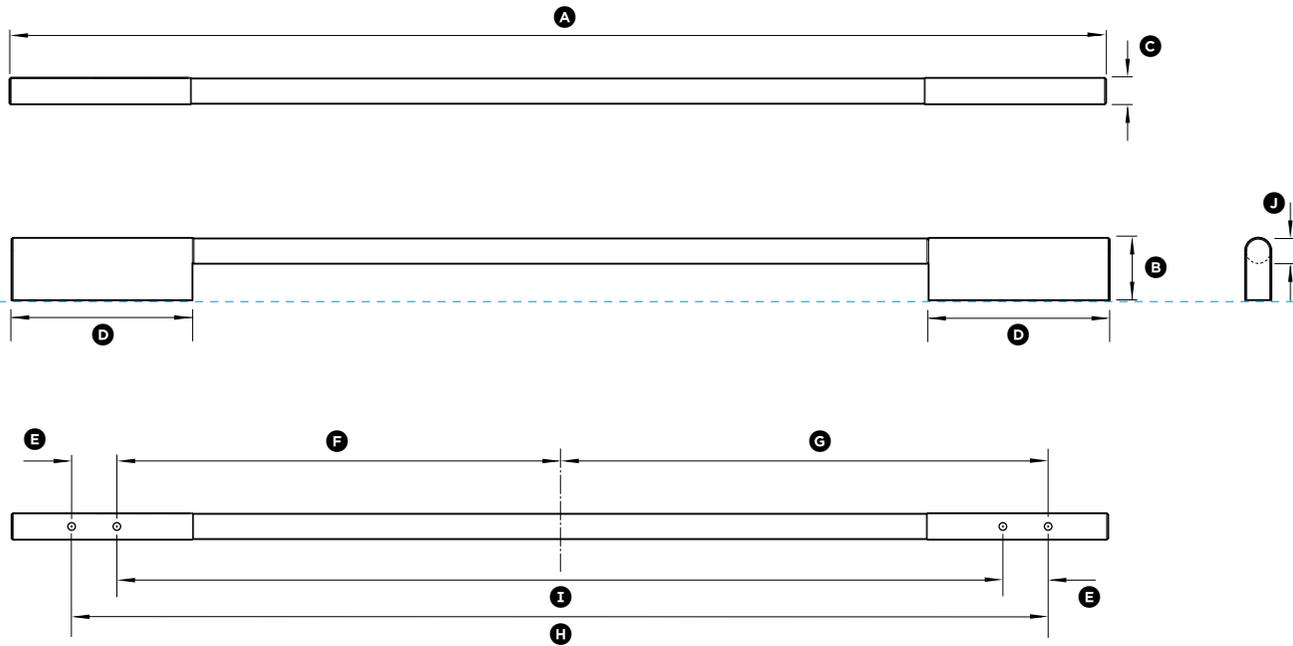

**Model no:**  
Round Handle **AHSOBDD60S**


**For Models:**  
DD24DI9 N, DD24DHI9 N, DD24DTI9 N, DD24DTX6II, DD24DTX6HII

**Compatible with door panel kits:**  
Round Handle for Door Panel Kits ADDD24DPX, ADDD24DTPX



Handle Dimensions	inch	mm
A Overall length of handle	22 1/4	565
B Overall depth of handle	1 5/8	41
C Overall height of handle	21/32	17
D Length of off-stand	3 15/16	100
E Distance between attachment holes between each off-stand	1 1/4	32
F Distance from centerline to inner attachment holes	8 1/2	216
G Distance from centerline to outer attachment holes	9 25/32	248.5
H Distance between inner attachment holes	17	432
I Distance between outer attachment holes	19 9/16	497
J Thickness of handle rail	5/8	16

\*DishDrawer Double - the dimensions are the same for both handles  
\*Suits standard 3/4" (19mm) panel. Thicker panels may require counterboring or longer screws

**Note:**  
Single DishDrawer requires one handle kit, double DishDrawer requires two handle kits.

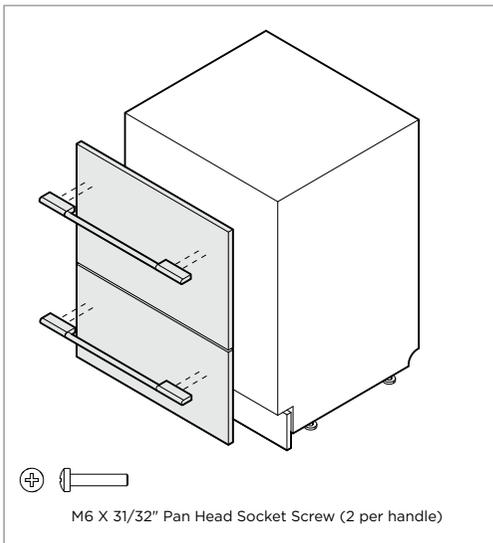

INDICATES PRODUCT DATUM -----  
**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

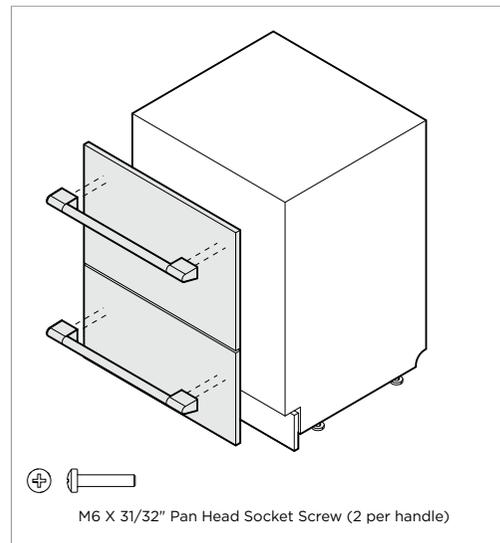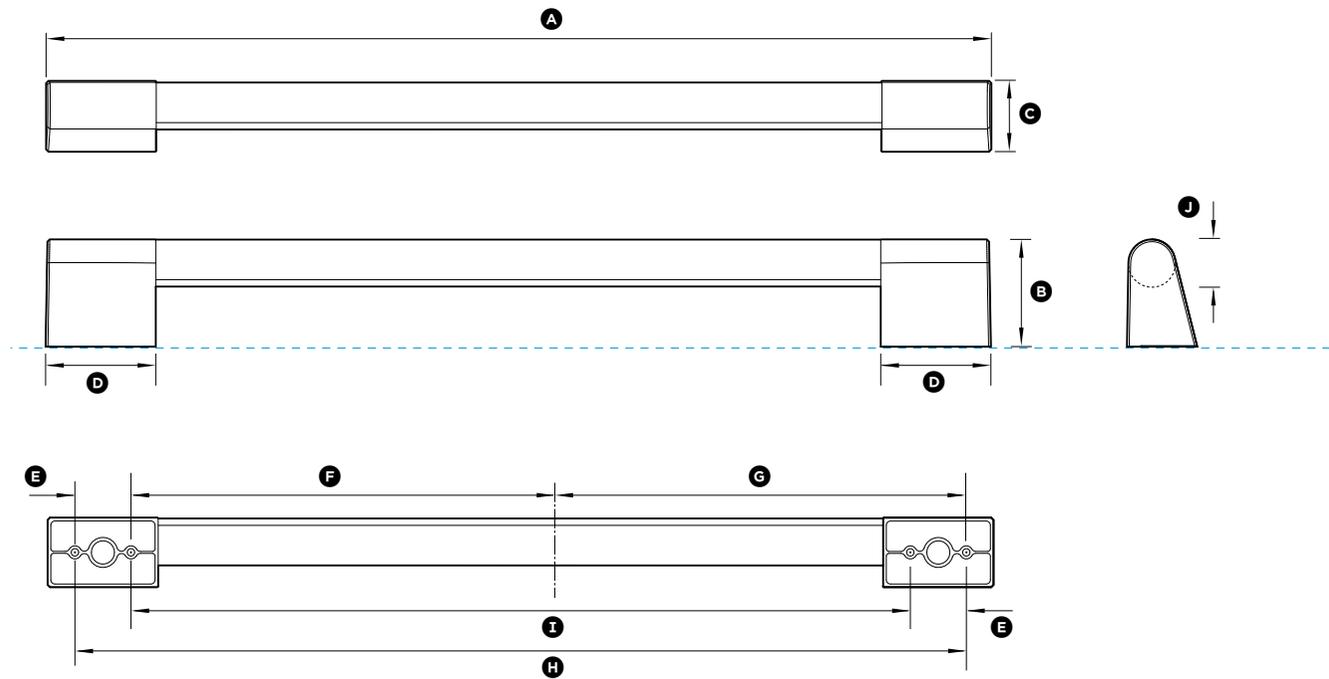

**Model no:**  
 Professional Flush Handle **AHP3DWDDSX**  
 Professional Flush Handle Brass **AHP3DDDW24BA**  
 Professional Flush Handle Dark Copper **AHP3DDDW24DC**

**For Models:**  
 DD24D19 N, DD24DH19 N, DD24DT19 N, DD24DTX6I1, DD24DTX6HI1

**Compatible with door panel kits:**  
 Professional Round Flush Handle for Door Panel Kits ADDD24DPX, ADDD24TPX


Handle Dimensions	inch	mm
A Overall length of handle	20 9/32	515
B Overall depth of handle	2 9/32	58
C Overall height of handle	1 1/2	38
D Length of off-stand	2 3/8	60
E Distance between attachment holes between each off-stand	1 1/4	32
F Distance from centerline to inner attachment holes	8 1/2	216
G Distance from centerline to outer attachment holes	9 25/32	248.5
H Distance between inner attachment holes	17	432
I Distance between outer attachment holes	19 9/16	497
J Thickness of handle rail	1	25

\*DishDrawer Double - the dimensions are the same for both handles  
 \*Suits standard 3/4" (19mm) panel. Thicker panels may require counterboring or longer screws

**Note:**  
 Single DishDrawer requires one handle kit, double DishDrawer requires two handle kits.

INDICATES PRODUCT DATUM -----

**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

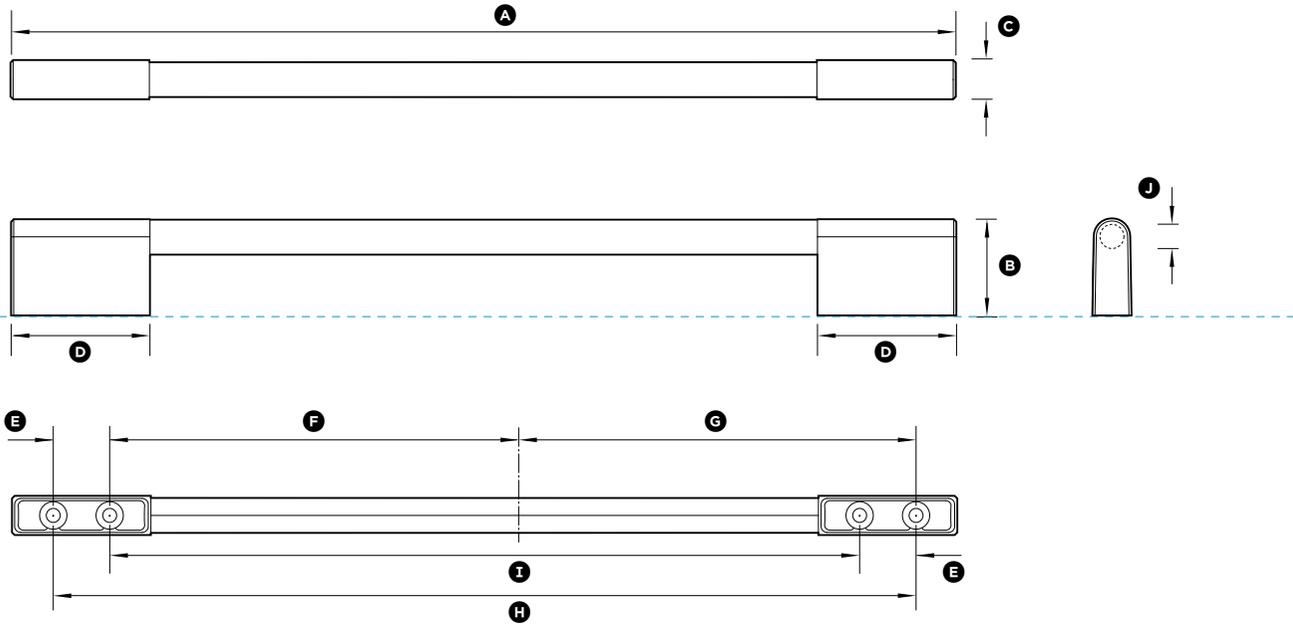

**Model no:**  
Classic Round Handle **AHCLDDW24X**


**For Models:**  
DD24D19 N, DD24DH19 N, DD24DT19 N, DD24DTX611, DD24DTX6H11

**Compatible with door panel kits:**  
Classic Round Handle for Door Panel Kits ADDD24DPX, ADDD24DTPX

Handle Dimensions	inch	mm
A Overall length of handle	21 7/16	544
B Overall depth of handle	2 3/16	55
C Overall height of handle	7/8	22
D Length of off-stand	3 1/8	80
E Distance between attachment holes between each off-stand	1 1/4	32
F Distance from centerline to inner attachment holes	8 1/2	216
G Distance from centerline to outer attachment holes	9 25/32	248.5
H Distance between inner attachment holes	17	432
I Distance between outer attachment holes	19 9/16	497
J Thickness of handle rail	13/16	20

\*DishDrawer Double - the dimensions are the same for both handles  
\*Suits standard 3/4" (19mm) panel. Thicker panels may require counterboring or longer screws

**Note:**  
Single DishDrawer requires one handle kit, double DishDrawer requires two handle kits.

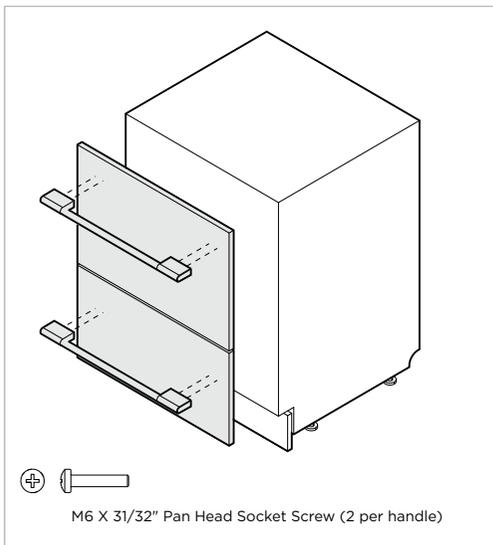

INDICATES PRODUCT DATUM -----

**IMPORTANT NOTE:** Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

