
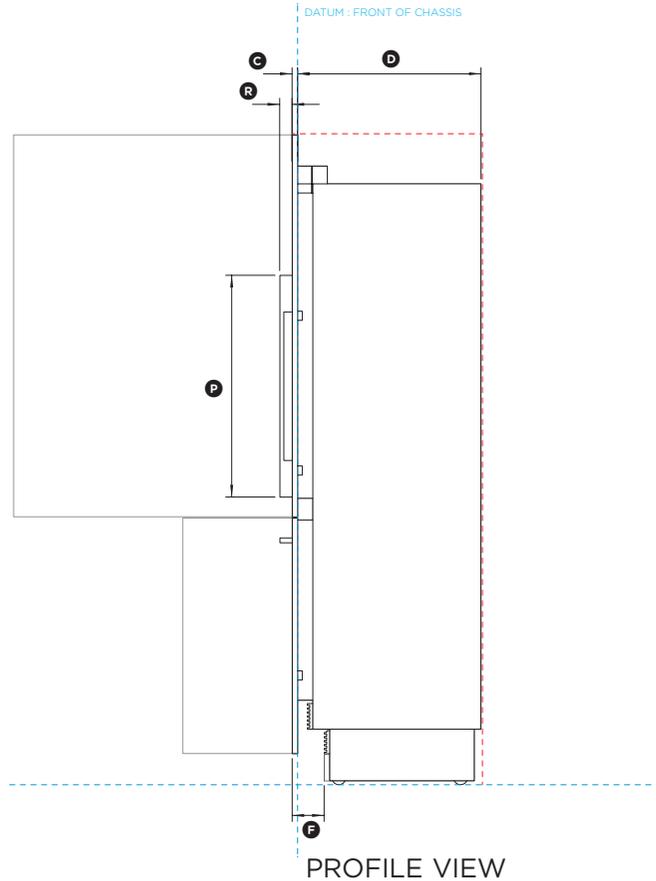
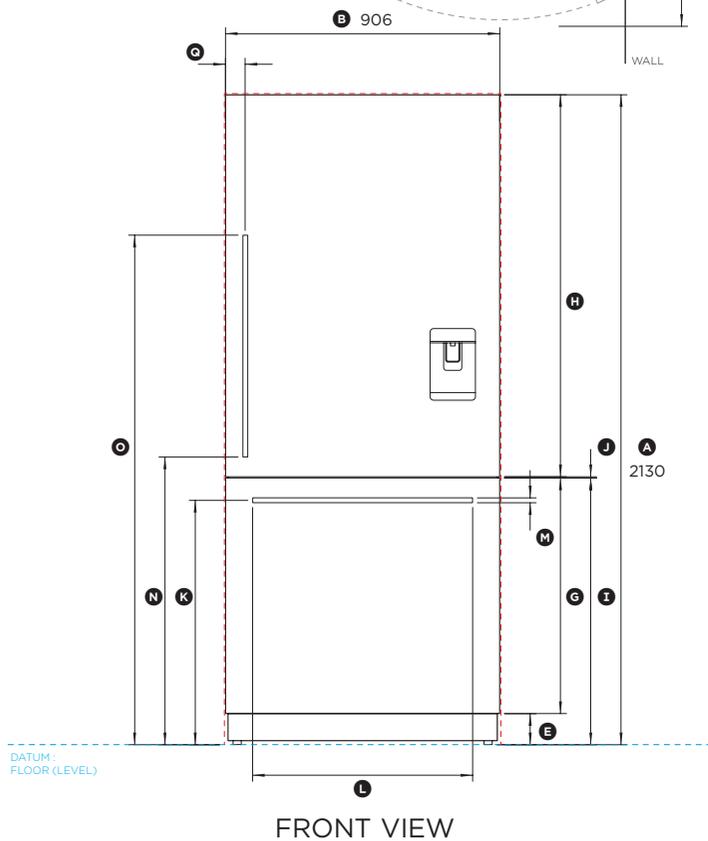


# FISHER & PAYKEL

## DATA SHEET 914mm ActiveSmart Built-In Fridge

0 100 200 400  
millimetres

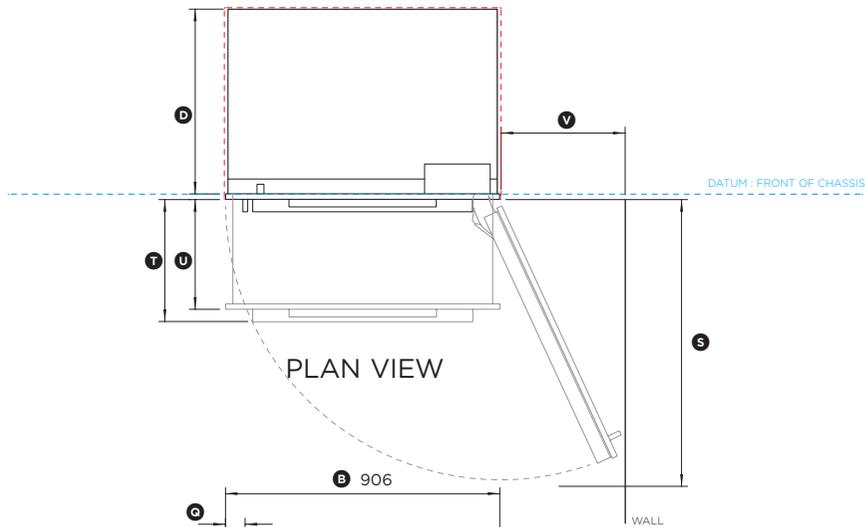

Model no:

**RS9120WRU1 (with Stainless Door panels PART NO. RD9120WRU)**

Product Dimensions	mm
Ⓐ Overall height of fridge	2130
Ⓑ Overall width of fridge	906
Ⓒ Depth of fridge front panels (excl. handles)	19
Ⓓ Overall depth of fridge (excl. front door panels)	606
Ⓔ Height of stainless steel toe kick*	102
Ⓕ Depth of toe kick measured from front of door	71 - 101
Ⓖ Height of bottom drawer panel	772
Ⓗ Height of top door panels	1252
Ⓙ Height from bottom datum to top of drawer panel	874
Ⓚ Gap between top and bottom door panels	4
Ⓛ Height from bottom datum to centre of bottom handle	801
Ⓜ Width of bottom handle	727
Ⓝ Thickness of handles	16
Ⓟ Height from bottom datum to bottom of top handle	943
Ⓠ Height from bottom datum to top of top handle	1670
Ⓡ Height of top handle	727
Ⓢ Distance from side of fridge to the centre of top handle	65
Ⓣ Depth of handle (measured from front of door)	41
Ⓤ Depth of door (widest opening) measured from front of door	940
Ⓡ Depth of drawer (open) measured from front of drawer, including handle	400
Ⓢ Depth of drawer (open) measured from front of drawer, excluding handle	360
Ⓣ Minimum door clearance to adjacent wall (115° - full internal access)	410

\* Alternatively customers can supply their own toe kick; height 102mm - 152mm.

Clearance Dimensions	mm
Minimum cabinetry gap from edge of product	4
Overall height of cavity	2134
Overall width of cavity	914
Overall minimum depth of cavity	635

INDICATES CABINETRY / PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

DATE: 12.08.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)