FISHER & PAYKEL

DATA SHEET

600mm Double DishDrawer™

Model no:

DD60DDFX9, DD60DDFHX9

| Dimensions | mm |
|---|-----------|
| A Overall height* of DishDrawer™ | 820 - 880 |
| ⑧ Overall width of DishDrawer™ | 599 |
| © Overall depth of DishDrawer™ | 573 |
| Depth of chassis | 553 |
| E Depth of front panel | 20 |
| 🖻 Height of chassis | 811 |
| © Distance from top datum to bottom of lower drawer front | 719 |
| Height of upper drawer front panel | 398 |
| Height of lower drawer front panel | 312 |
| ④ Height from top of front panel to top of chassis | 2 |
| 🛞 Ventilation gaps between panels | 8 |
| U Height of handle | 16 |
| Depth of handle | 41 |
| $^{(\!$ | 72 |
| \odot Height from top of lower front panel to centerline of handle | 72 |
| P Width of handle | 564 |
| Height of toekick recess (adjustable) | 100 - 160 |
| ® Height of toekick panel (adjustable) | 70 - 120 |
| ⑤ Depth of toekick recess (adjustable) | 38 - 54 |
| T Height of mounted feet (adjustable) | 9 - 69 |
| O Maximum extension of drawer from drawer front | 527 |

| Minimum Clearances | mm |
|---|-----|
| Minimum inside height of cavity* | 820 |
| Minimum inside width of cavity | 600 |
| Minimum inside depth of cavity from front datum | 560 |
| Minimum clearance from a corner cupboard | 13 |

* Depending on adjustment of leveling feet.


Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.

DATE: 28.05.2018

Ø

Ø

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

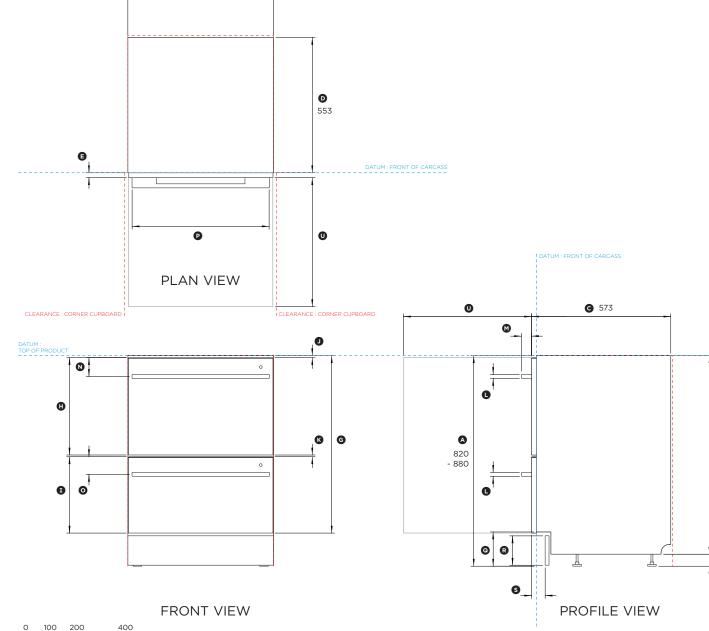

B 599

millimetres