

Model no:

**PBE1** (refer page 2 for metric measurements)

**Dimensions**

	<b>in</b>
Ⓐ Height below countertop datum to bottom of chassis	9 15/16"
Ⓑ Overall height of grill	11"
Ⓒ Overall width of grill	24"
Ⓓ Overall depth of grill (excluding knobs)	26 7/8"
Ⓔ Height of chassis	10 1/2"
Ⓕ Height above countertop	1 1/16"
Ⓖ Height of chassis above countertop	9/16"
Ⓗ Depth of control panel to front datum	2"
Ⓘ Depth from control panel to rear of product	25 1/2"
Ⓚ Depth from front datum to rear of chassis below countertop	22 1/2"
Ⓛ Depth of rear flange	1"
Ⓜ Depth from chassis bullnose to front datum	3 3/8"
Ⓝ Width of side flanges	1 1/8"
Ⓞ Width of chassis inside enclosure	21 3/4"
Ⓟ Height of lid	1 11/16"
Ⓠ Width of lid	23 5/8"
Ⓡ Depth of lid	23"

**Minimum Clearances**

	<b>in</b>
Overall width of cavity	22 1/2"
Overall depth of cavity	22 3/4"
Overall height of cavity	10 1/8"
Clearance to vertical non-combustible surface above countertop at rear and sides	3"
Clearance to vertical combustible surface above countertop at rear and sides	18"

If the griddle is to be placed into a combustible enclosure, an approved insulated jacket is necessary. Use only the DCS insulated jacket which has specifically been designed and tested for this purpose.


**24" insulated jacket model number: BGA24-IJS**

INDICATES CUTOUT .....  
 INDICATES PRODUCT / CABINETY DATUM .....  
 INDICATES CLEARANCES .....

DATE: **26.02.2024**

90000300B

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. [www.dcsappliances.com](http://www.dcsappliances.com)

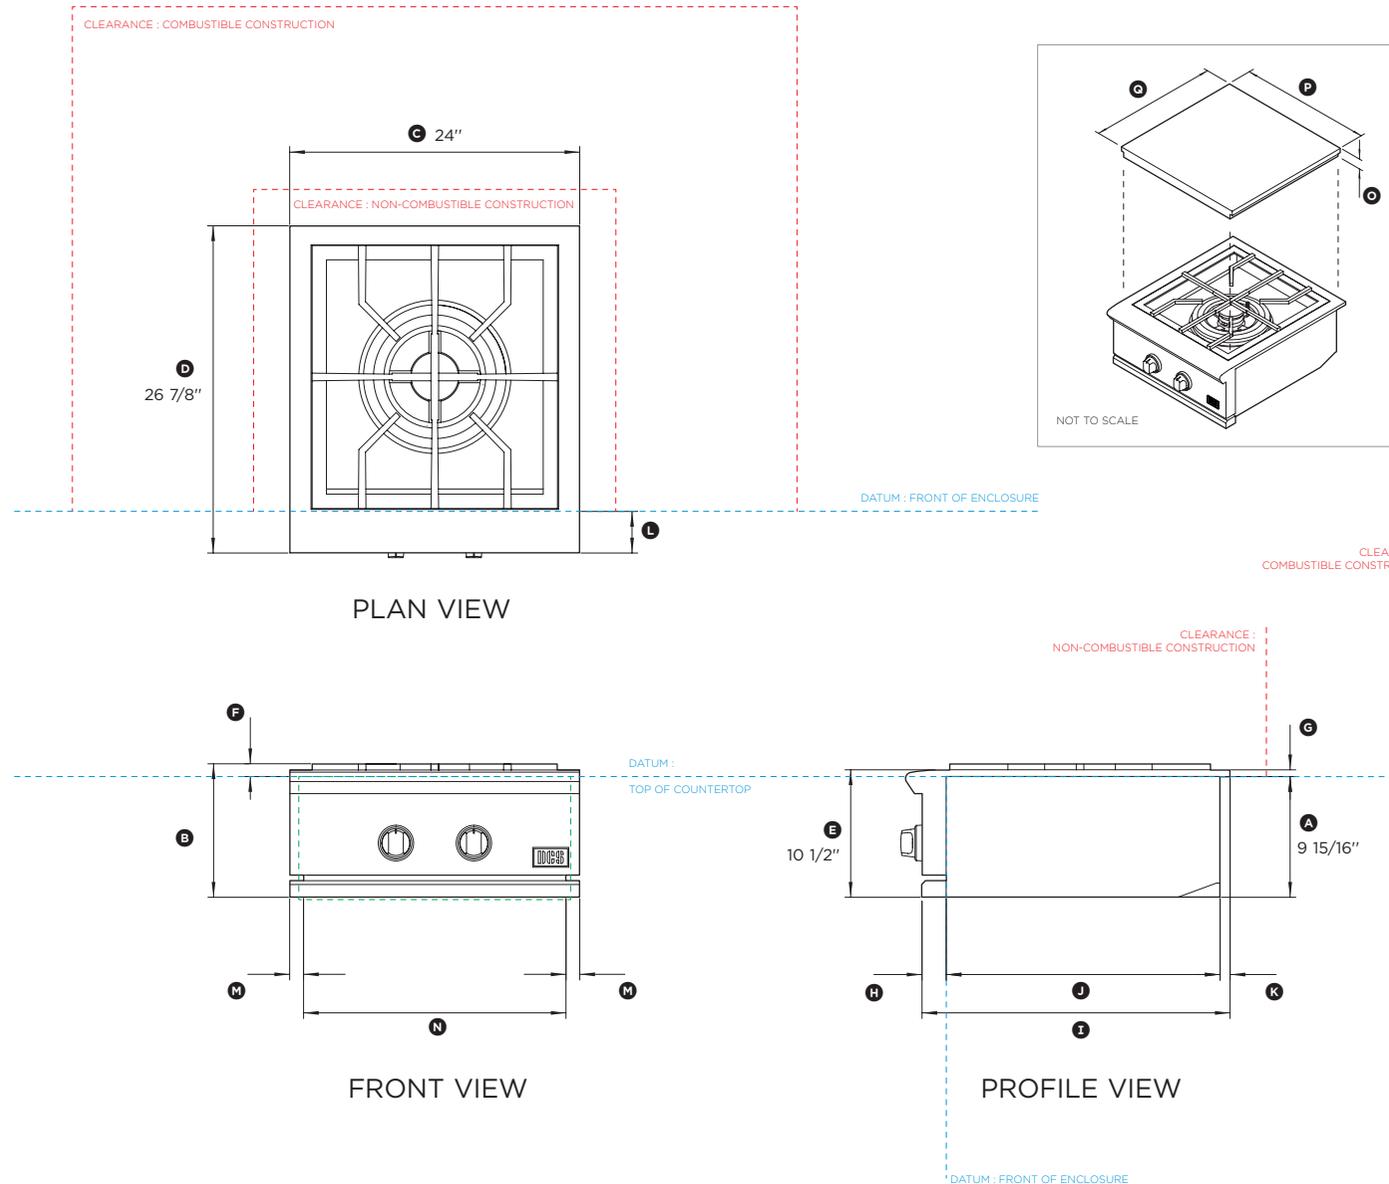

Model no:

**PBE1** (refer page 1 for imperial measurements)

Dimensions	mm
Ⓐ Height below countertop datum to bottom of chassis	252
Ⓑ Overall height of grill	279
Ⓒ Overall width of grill	610
Ⓓ Overall depth of grill (excluding knobs)	683
Ⓔ Height of chassis	266
Ⓕ Height above countertop	27
Ⓖ Height of chassis above countertop	14
Ⓗ Depth of control panel to front datum	52
Ⓘ Depth from control panel to rear of product	649
Ⓚ Depth from front datum to rear of chassis below countertop	572
Ⓛ Depth of rear flange	25
Ⓛ Depth from chassis bullnose to front datum	87
Ⓜ Width of side flanges	29
Ⓝ Width of chassis inside enclosure	552
Ⓞ Height of lid	43
Ⓟ Width of lid	600
Ⓠ Depth of lid	585

Minimum Clearances	mm
Overall width of cavity	572
Overall depth of cavity	578
Overall height of cavity	257
Clearance to vertical non-combustible surface above countertop at rear and sides	76
Clearance to vertical combustible surface above countertop at rear and sides	457



If the griddle is to be placed into a combustible enclosure, an approved insulated jacket is necessary. Use only the DCS insulated jacket which has specifically been designed and tested for this purpose.

**24" insulated jacket model number: BGA24-IJS**


INDICATES CUTOUT .....  
 INDICATES PRODUCT / CABINETY DATUM .....  
 INDICATES CLEARANCES .....

DATE: **26.02.2024** 90000300B

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. [www.dcsappliances.com](http://www.dcsappliances.com)

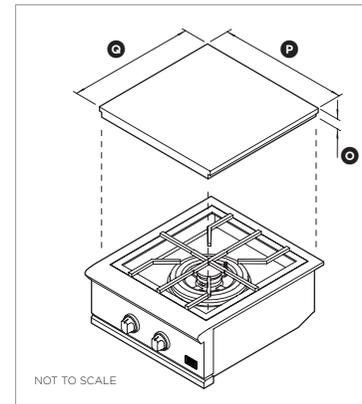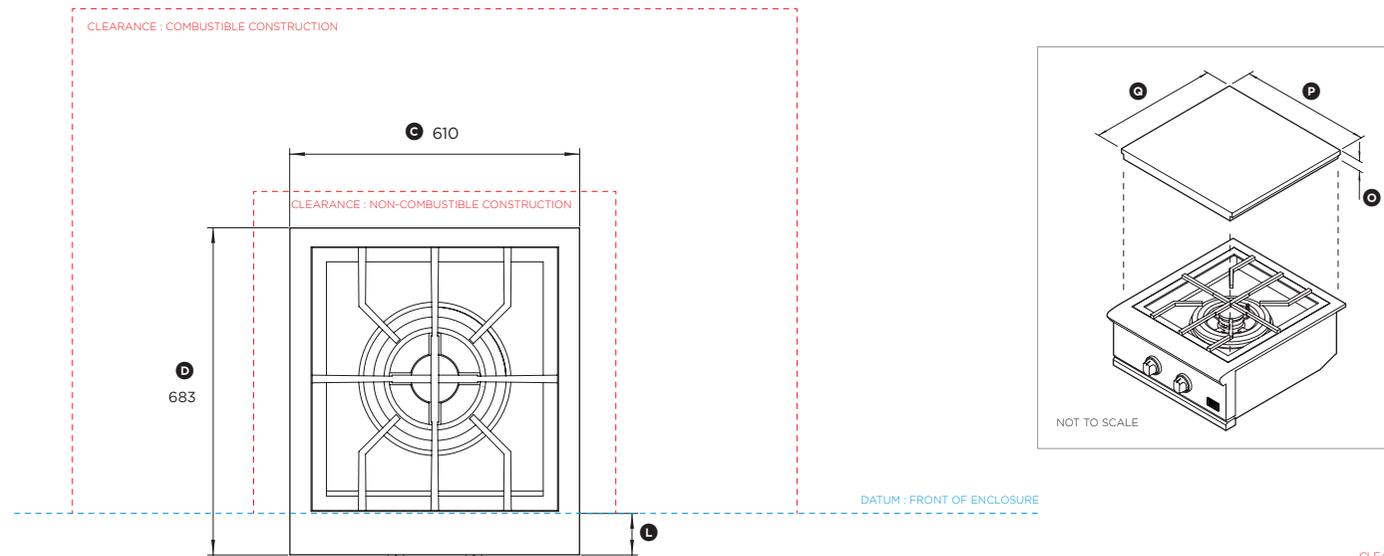

PLAN VIEW

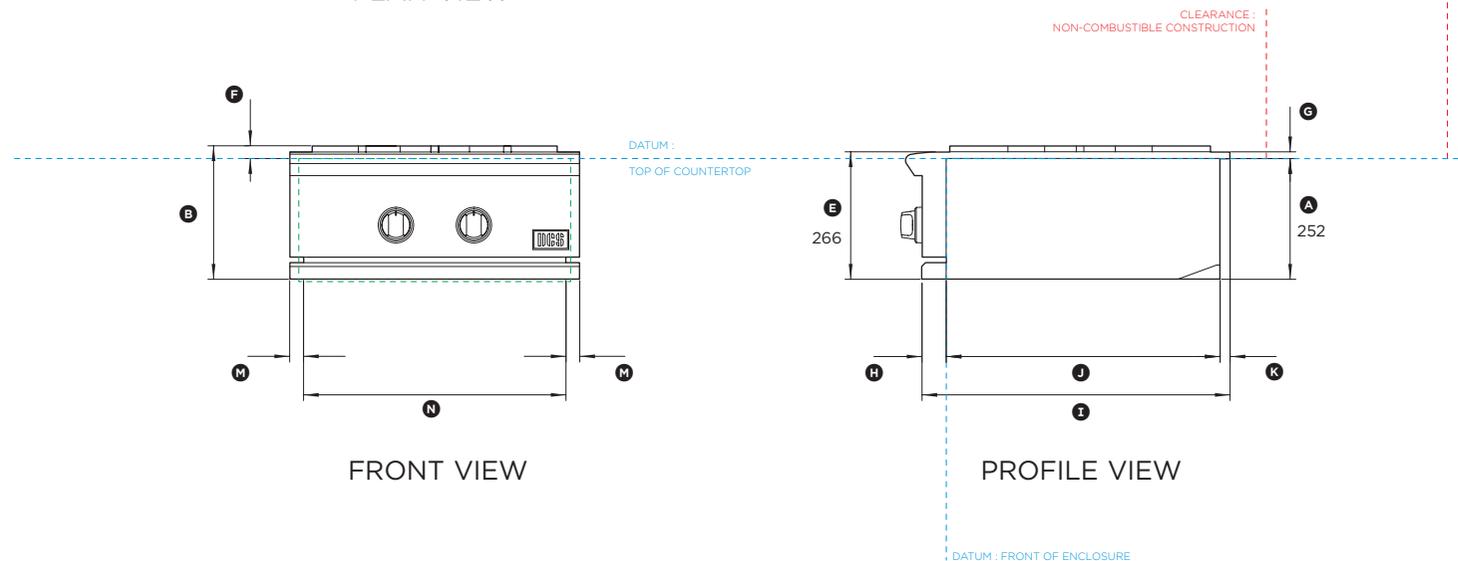

FRONT VIEW

PROFILE VIEW

