

FISHER & PAYKEL

DATA SHEET 900MM CoolDrawer™

Model no:
RB90S64MKIW1


Product Dimensions	mm
Ⓐ Overall height* of CoolDrawer™**	640
Ⓑ Overall width* of CoolDrawer™	855
Ⓒ Depth of CoolDrawer™ chassis (includes power terminal)	557
Ⓓ Height from bottom datum to bottom of drawer front*	154 - 184
Ⓔ Height from bottom datum to top of drawer front*	635
Ⓕ Width of internal drawer front*	805
Ⓖ Depth of internal drawer front*	45
Ⓗ Depth of drawer (open) measured from front datum*	520

* Does not include the custom door panel, false panel or handle to be manufactured and fitted by cabinetmaker

NOTE: Height of custom panel drawer and false panel can vary depending on door positioning and adjustment

Minimum Clearances	mm
Minimum inside height of cavity from bottom datum	644
Minimum inside height of cavity when using outlet duct**	665
Minimum height of outlet duct spacer below bottom datum	21
Minimum inside width of cabinetry	864
Minimum inside depth of cavity from front datum	560
Minimum gap between drawer panel to top of custom false panel	4
Minimum height of toe kick	50

** Outlet duct requires a spacer of 21mm. Refer to installation guide for details.

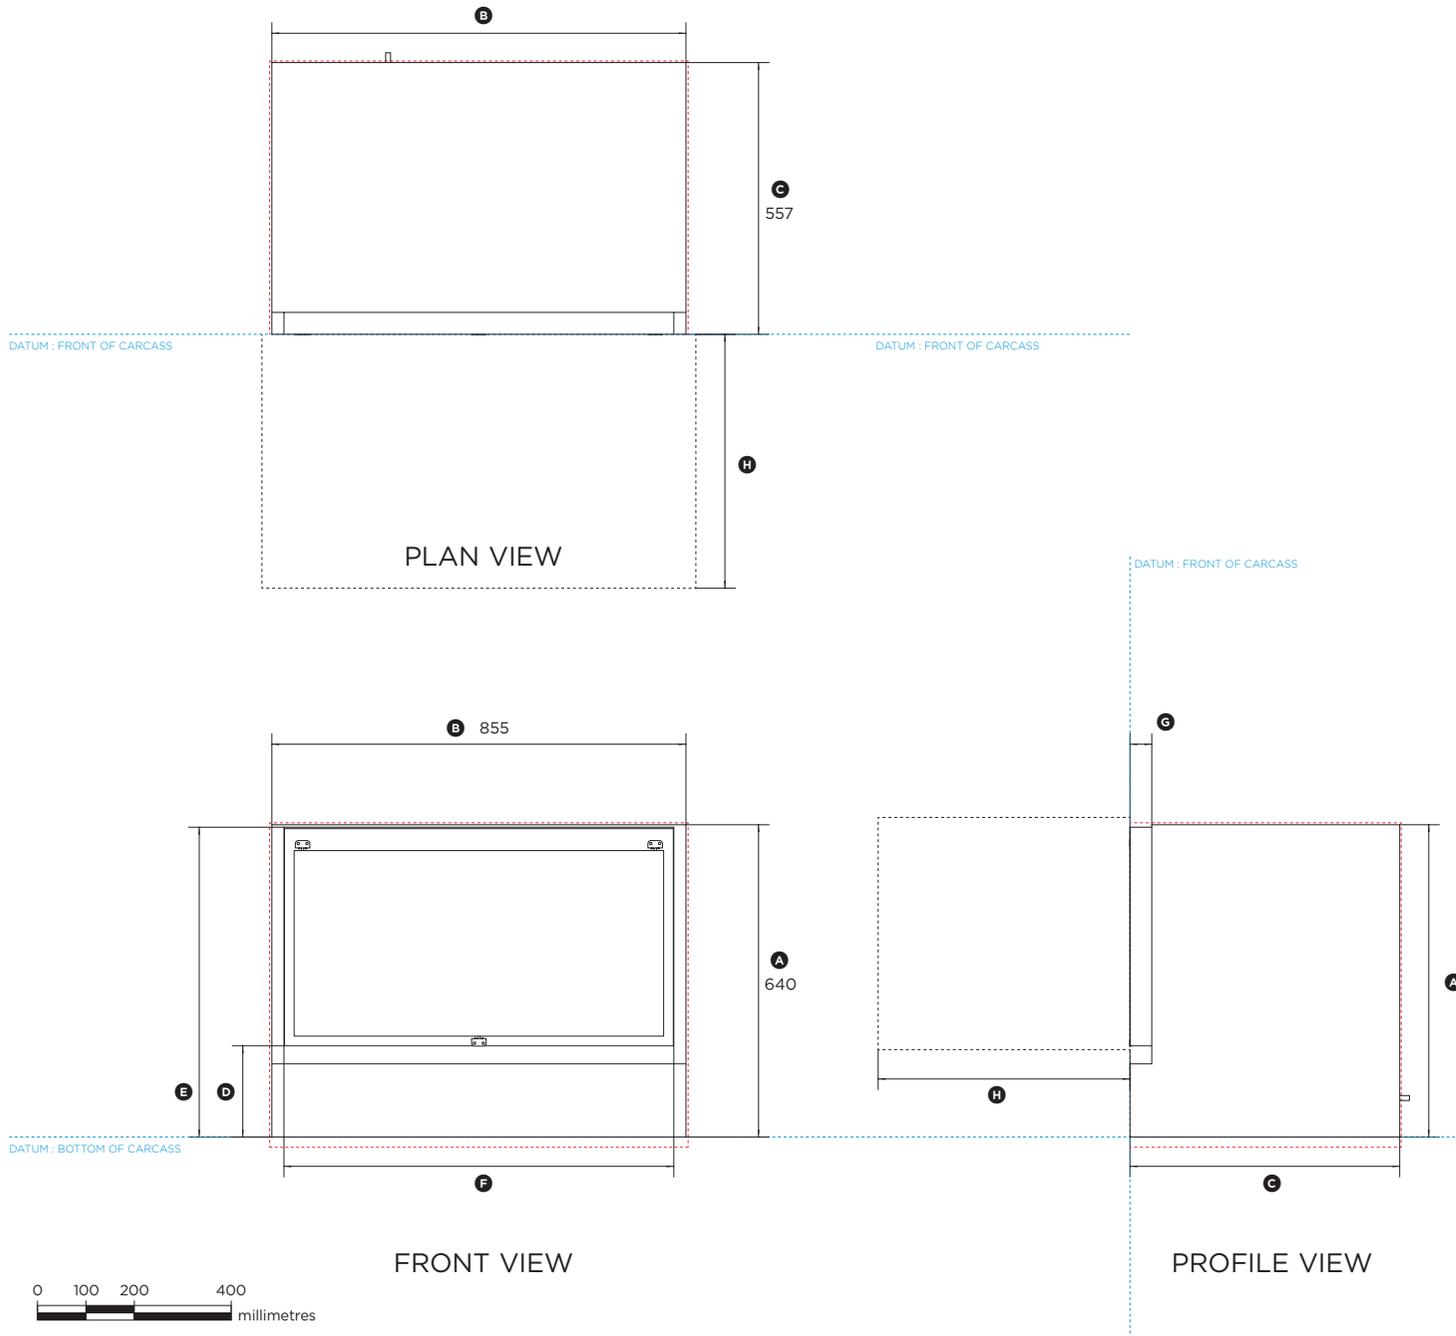

INDICATES PRODUCT DATUM -----
INDICATES CABINERY CLEARANCES - - - - -

DATE: **03.12.2019**

IMPORTANT: Throughout this guide, dimensions may vary by +/-2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET 900MM CoolDrawer™


Model no:
RB90S64MKIW1 with dual custom panels

Custom Panel Dimensions	mm
Ⓐ Height of custom drawer panel	min 476
Ⓑ Width of custom drawer panel	896
Ⓒ Depth of custom drawer panel	16 - 20
Ⓓ Gap between panels	4
Ⓔ Height of custom false panel	150 - 180
Ⓕ Width of custom false panel	min 896
Ⓖ Depth of custom false panel	16 - 20
Maximum weight of drawer panel**	7kg


Minimum Clearances	mm
Ⓘ Minimum height of toe kick	50
Ⓢ Minimum depth of toe kick (not including custom panels)	40

Custom false panel, drawer panel and handles to be manufactured and fitted by cabinetmaker. These panels must be adequately sealed to withstand moisture (50°C @ 80% RH)

** Includes weight of handle

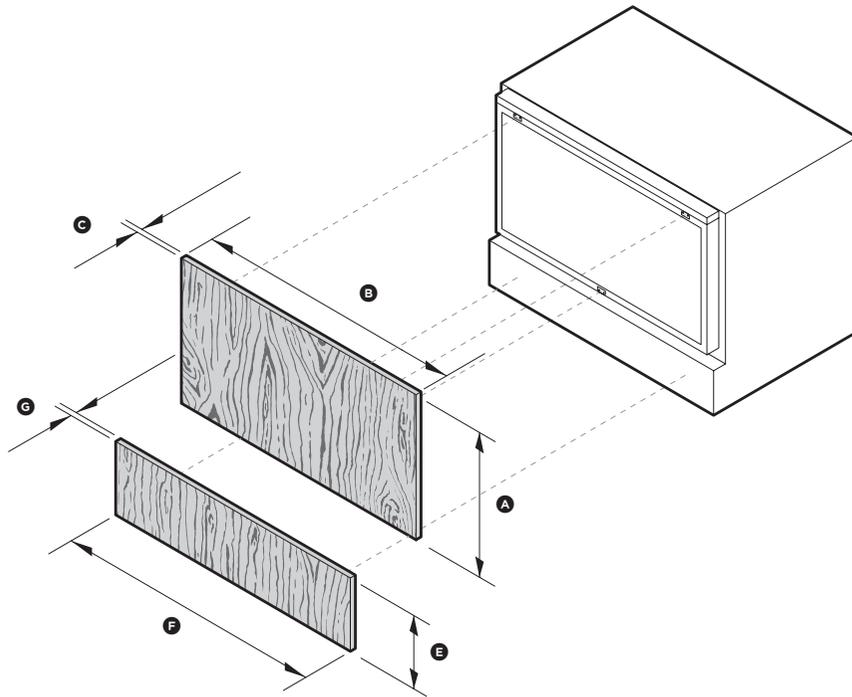

ISO VIEW

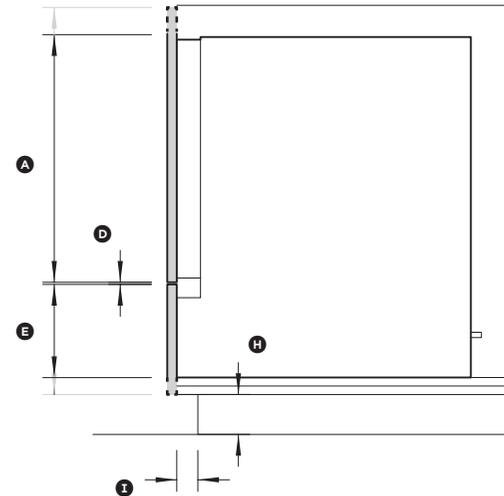

PROFILE VIEW

DATE: **03.12.2019**

IMPORTANT: Throughout this guide, dimensions may vary by +/-2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET 900MM CoolDrawer™


Model no:
RB90S64MKIW1 with single panel

Custom Panel Dimensions	mm
Ⓐ Height of custom drawer panel	min 630
Ⓔ Width of custom drawer panel	896
Ⓒ Depth of custom drawer panel	16 - 20
Maximum weight of drawer panel**	7kg


Minimum Clearances	mm
Ⓓ Minimum height of toe kick	50
Ⓔ Minimum depth of toe kick (not including custom panels)	40

Custom drawer panel and handles to be manufactured and fitted by cabinetmaker. These panels must be adequately sealed to withstand moisture (50°C @ 80% RH)

** Includes weight of handle. To meet the 7kg weight limit and maintain drawer component life, it may be necessary to hollow out sections of the rear face of the drawer panel

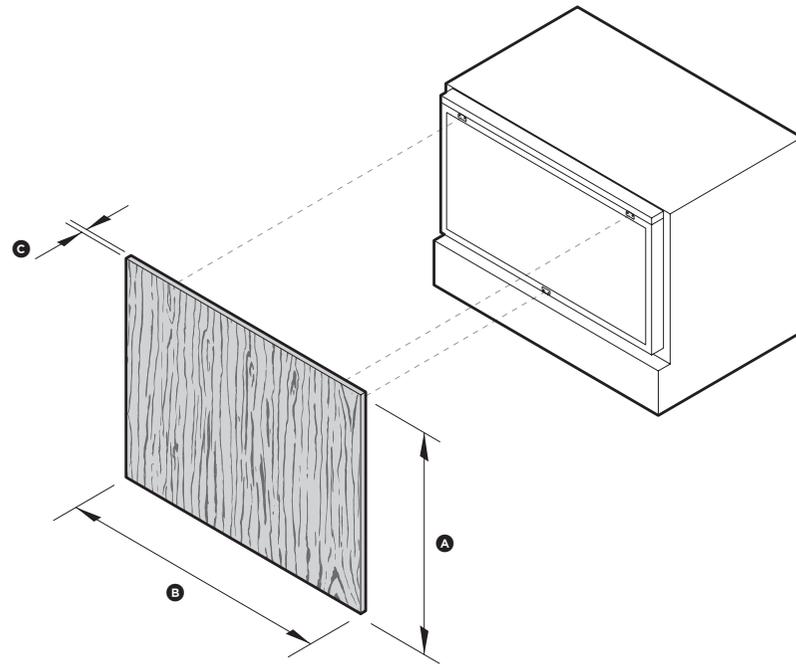

ISO VIEW

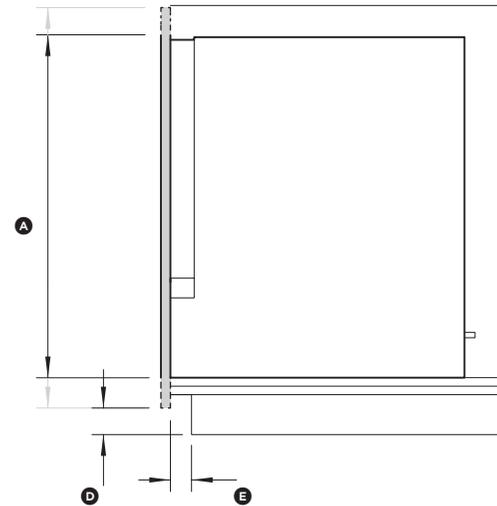

PROFILE VIEW

DATE: **03.12.2019**

IMPORTANT: Throughout this guide, dimensions may vary by +/-2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com