


Model no:

GDE1-30 (refer page 2 for metric measurements)

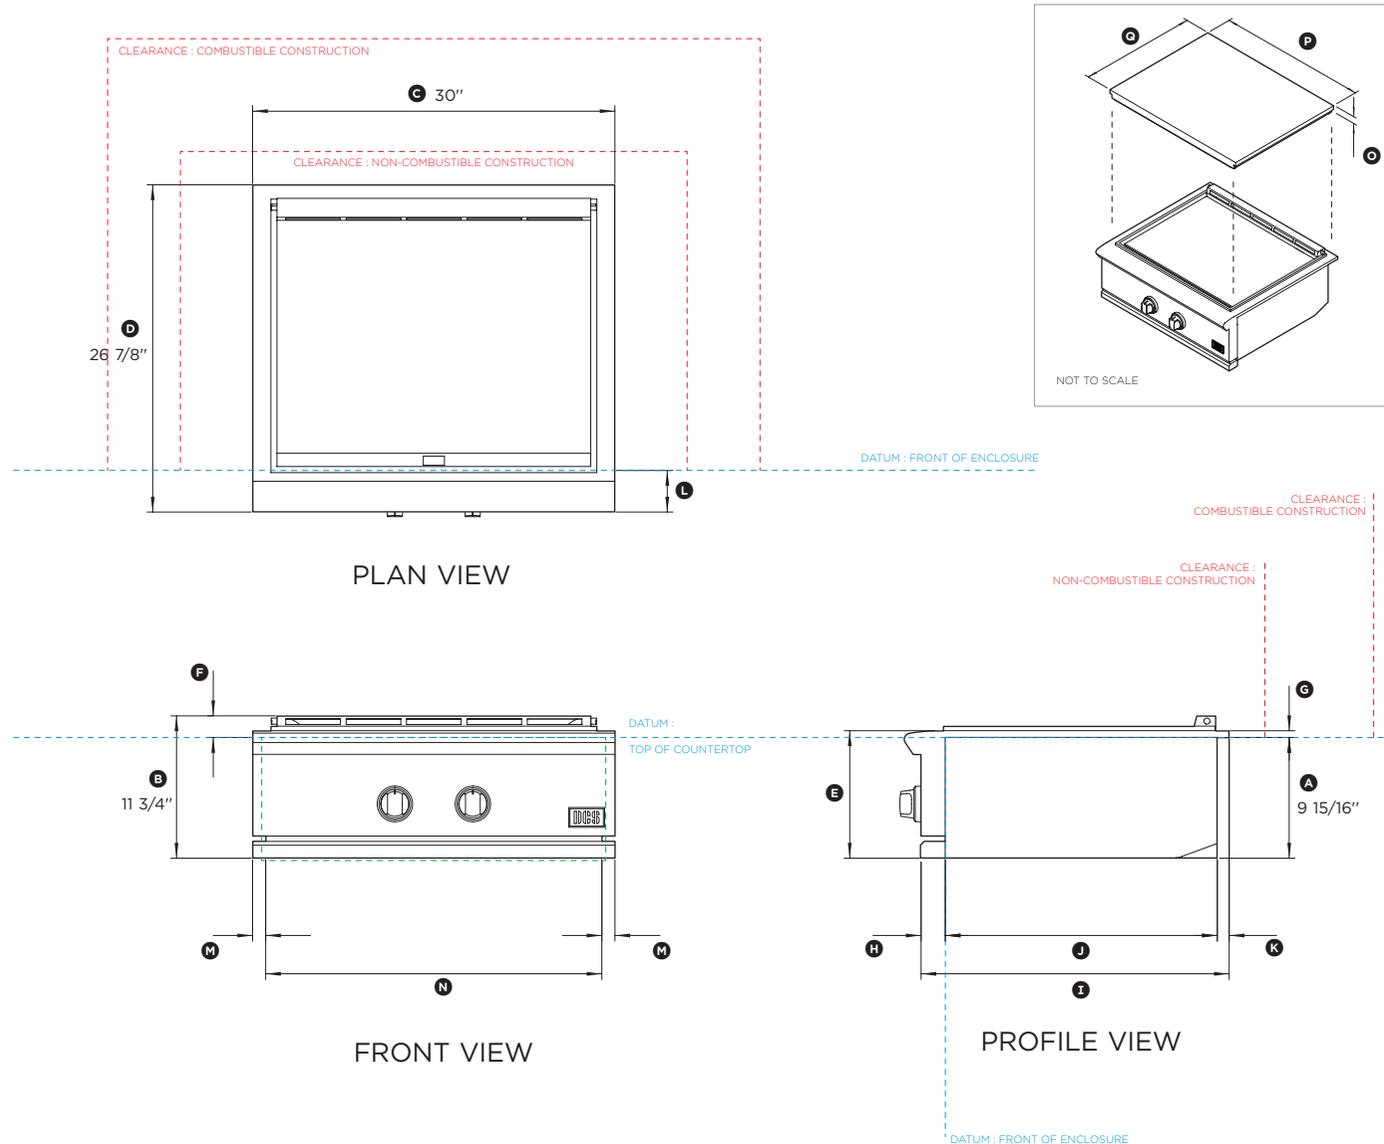

Dimensions	in
A Height below countertop datum to bottom of chassis	9 15/16"
B Overall height of grill	11 5/8"
C Overall width of grill	30"
D Overall depth of grill (excluding knobs)	26 7/8"
E Height of chassis	10 1/2"
F Height above countertop	1 13/16"
G Height of chassis above countertop	9/16"
H Depth of control panel to front datum	2"
I Depth from control panel to rear of product	25 1/2"
J Depth from front datum to rear of chassis below countertop	22 1/2"
K Depth of rear flange	1"
L Depth of chassis bullnose to front datum	3 3/8"
M Width of side flanges	1 1/16"
N Width of chassis inside enclosure	27 13/16"
O Height of lid	1 11/16"
P Width of lid	29 1/2"
Q Depth of lid	22 15/16"

Minimum Clearances	in
Overall width of cavity	28 1/2"
Overall depth of cavity	22 3/4"
Overall height of cavity	10 1/8"
Clearance to vertical non-combustible surface above countertop at rear	3"
Clearance to vertical non-combustible surface above countertop at sides	6"
Clearance to vertical combustible surface above countertop at rear and sides	12"

If the griddle is to be placed into a combustible enclosure, an approved insulated jacket is necessary. Use only the DCS insulated jacket which has specifically been designed and tested for this purpose.

30" insulated jacket model number: BGB30-IJS

INDICATES CUTOUT -----
 INDICATES PRODUCT / CABINETSRY DATUM -----
 INDICATES CLEARANCES -----


DATE: **27.02.2024** 90000270B

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. www.dcsappliances.com



Model no:

GDE1-30 (refer page 1 for imperial measurements)

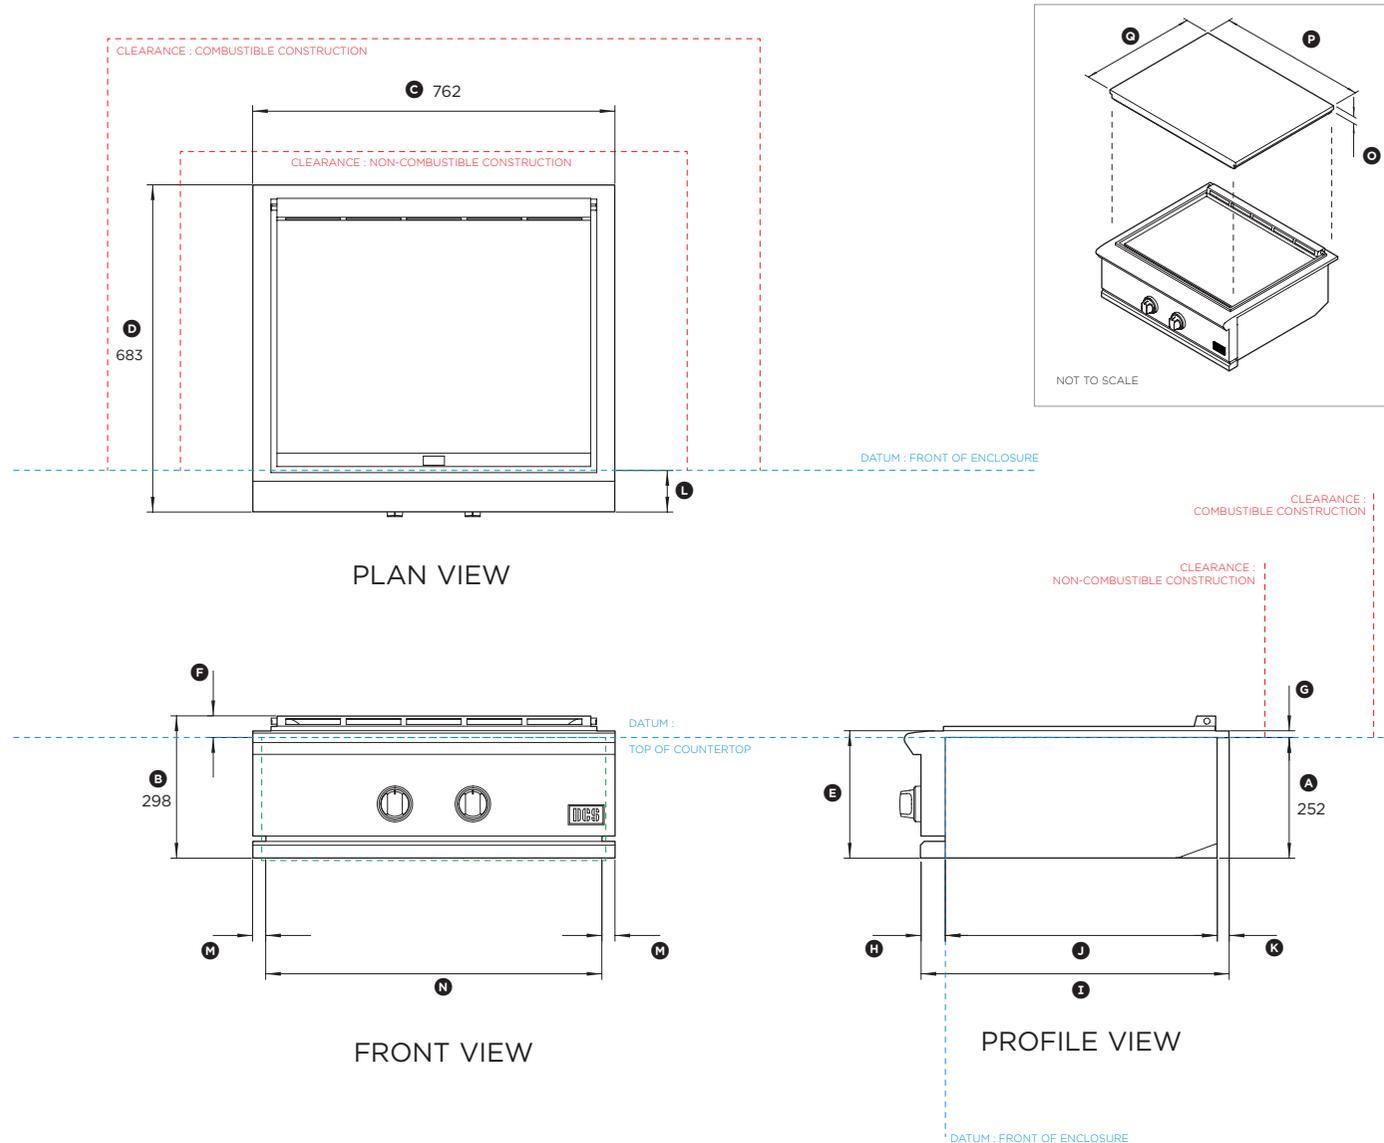

Dimensions	mm
Ⓐ Height below countertop datum to bottom of chassis	252
Ⓑ Overall height of grill	295
Ⓒ Overall width of grill	762
Ⓓ Overall depth of grill (excluding knobs)	683
Ⓔ Height of chassis	266
Ⓕ Height above countertop	46
Ⓖ Height of chassis above countertop	14
Ⓗ Depth of control panel to front datum	51
Ⓘ Depth from control panel to rear of product	647
Ⓛ Depth from front datum to rear of chassis below countertop	572
Ⓚ Depth of rear flange	25
Ⓛ Depth from chassis bullnose to front datum	87
Ⓜ Width of side flanges	27.5
Ⓝ Width of chassis inside enclosure	707
Ⓞ Height of lid	43
Ⓟ Width of lid	750
Ⓠ Depth of lid	583

Minimum Clearances	mm
Overall width of cavity	724
Overall depth of cavity	578
Overall height of cavity	257
Clearance to vertical non-combustible surface above countertop at rear	76
Clearance to vertical non-combustible surface above countertop at sides	152
Clearance to vertical combustible surface above countertop at rear and sides	305

If the griddle is to be placed into a combustible enclosure, an approved insulated jacket is necessary. Use only the DCS insulated jacket which has specifically been designed and tested for this purpose.

30" insulated jacket model number: BGB30-IJS

INDICATES CUTOUT -----
 INDICATES PRODUCT / CABINETRY DATUM -----
 INDICATES CLEARANCES -----

DATE: **27.02.2024**

90000270B

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. www.dcsappliances.com