




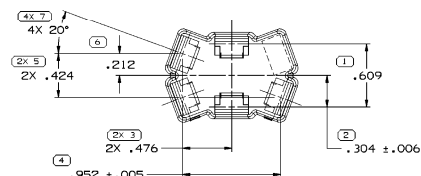


MISSING SYMBOLS				ZONE		REVISION HISTORY		AUTH		DR	IP	AP	PO
DATE				STG	REV	NP	CD						
NO MISSING SYMBOL NUMBER				04F03	R	01	-	CREATED PD		236202	LEG	LEG	ET
				04F03	R	02	-	ALL PARTS - ADDED VIEW AND COLUMN HEADER		237476	LEG	LEG	ET
				01N003	R	03	-	ALL PARTS - REDRAWN TO LATEST PD		274072	AMG	AMG	ET
				01C010	R	04	-	ALL PARTS - ADDED CAVITY ID NOTE AND CAVITY ID SYMBOLS		412149	ACR	JAN	RR




TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN



TYPE 101

MATERIAL RECYCLING CODE
OPTIONAL



NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:

DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE TOOL PATH DATA). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. MATERIAL RECYNCLING CODE PER ISO 11469, (.100)X(.010) RAISED CHARACTERISTICS TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYNCLING CODE.
3. (.075)X(.010) RAISED DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE. PREFERREDLY VISIBLE TO ASSEMBLY. OPTIONAL CONSTRUCTION TO BE "PED" OR NO LOGO.
4. FOR APPLICATION DATA SEE THE INDIVIDUAL APPLICATION DRAWINGS.
5. CAVITY IDENTIFICATION IS NOT ON PARTS, IT IS JUST SHOWN AS REFERENCE.
6. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM, MINOR IMPERFECTIONS INCLUDING, BUT NOT LIMITED TO, FLOW MARKS, COLOR VARIATIONS, GATE VESTIGES, AND SURF. MARKS THAT DO NOT AFFECT FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER DPM-4.7-CS-01.

12052978	03	AC	-	POLYPROPYLENE COMPOUND NATURAL	102	6	TERMINAL HOLDING	6.643
08911352	03	AC	-	POLYPROPYLENE COMPOUND BLACK	101	5	FLASHED	6.505
PART NO	REV	N/P	STATUS	MATERIAL SPECIFICATION AND COLOR	TYPE	CAVITIES	⊗ CAVITY	VOLUME CM³

B PROCESS SENSITIVE DIMENSION				
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED				
DIMENSIONAL RANGE (IN)		CHART		
FROM	0	>.750	>1.250	>2.750
TO	.750	1.250	2.750	4.000
TOLERANCE UNLESS OTHERWISE SPECIFIED				
	.005	.010	.012	.015

