

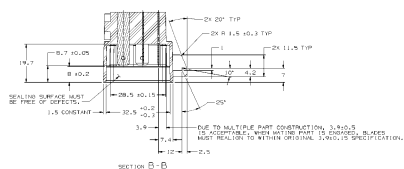



OPTIONAL CONSTRUCTION



SECTION B-B






MATING CONNECTOR INFORMATION



NOTES

RECOMMENDED BLADE MATERIAL - MALE BLADE MATERIAL SHOULD HAVE AN ELECTRICAL CONDUCTIVITY $\geq 20\%$ IACS AT 60°F. USE OF A MATERIAL WITH CONDUCTIVITY $< 20\%$ IACS SHOULD BE APPROVED BY PACKARD ELECTRIC.

MATING BLADE INFORMATION
SCALE 5:1

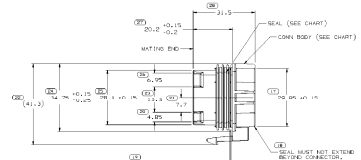

CABLE SEAL (SEE CHART)



TYPE 102





TYPE 103



TYPE 104
SAME AS TYPE 101



TYPE 105
SAME AS TYPE 102



SECTION A -

[illegible]

NOTES

- [illegible]

1	20
2	35
3	57.6
4	87
5	100

7. FOR APPLICATION DATA SEE THE INDIVIDUAL APPLICATION DRAWINGS.
8. NO PROCESSING OIL ALLOWED TO BE ADDED TO AID IN THE APPLICATION OF THE SEAL TO THE CONNECTOR.
9. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM, WHICH MEANS IT IS NOT SUBJECT TO THE REQUIREMENTS FOR COLOR, BLEMISHES, GATE VESICLES, AND SOFT FLASKS THAT DO NOT AFFECT THE FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER DPM-4.7.7-(C)-01.
10. S-A-M-T LUBRICANT LUBRICANT CAN BE USED AS AN AUXILIARY LUBRICANT FOR THE SEAL AND THE SEALING SURFACES.

DELPHI DELTA COMPANY INC. 10000 DELTA DRIVE DELTA, OHIO 43015 (614) 891-1000 FAX (614) 891-1001 CIRCLE 10 ON READER SERVICE CARD		DELPHI DELTA COMPANY INC. 10000 DELTA DRIVE DELTA, OHIO 43015 (614) 891-1000 FAX (614) 891-1001 CIRCLE 10 ON READER SERVICE CARD	
NAME _____ TITLE _____ COMPANY _____ ADDRESS _____ CITY _____ STATE _____ ZIP _____ COUNTRY _____		NAME _____ TITLE _____ COMPANY _____ ADDRESS _____ CITY _____ STATE _____ ZIP _____ COUNTRY _____	
NAME _____ TITLE _____ COMPANY _____ ADDRESS _____ CITY _____ STATE _____ ZIP _____ COUNTRY _____		NAME _____ TITLE _____ COMPANY _____ ADDRESS _____ CITY _____ STATE _____ ZIP _____ COUNTRY _____	
NAME _____ TITLE _____ COMPANY _____ ADDRESS _____ CITY _____ STATE _____ ZIP _____ COUNTRY _____		NAME _____ TITLE _____ COMPANY _____ ADDRESS _____ CITY _____ STATE _____ ZIP _____ COUNTRY _____	

20202