




RECOMMENDED MATERIAL: P-1546 (CA-210)BRASS - EXTRA SPRINGS
TEMPER - TIN PLATED
PLATING THICKNESS: 0.003-0.005 MM
TENSILE STRENGTH: 420 MPA

NOTE - USE OF A MATERIAL WITH A CONDUCTIVITY
 $\leq 20N$ (ACS AT 68° F) SHOULD BE APPROVED BY
 PACKARD ELECTRIC.

TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN




OPTIONAL CONSTRUCTION




TYPE 10


SAME AS TYPE 101
EXCEPT AS SHOWN



SECTION C-C




TYPE 101




	A	B	C	D
--	---	---	---	---

- [illegible]

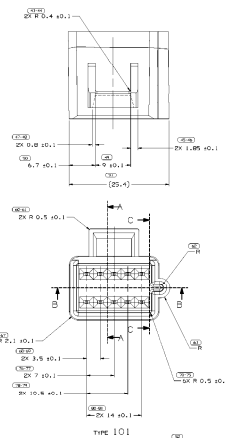

TYPE 101



SECTION B-

MATING CONNECTOR INFORMATION

1504056	AA	-	101	PS TAMPON COMPOUND BLACK	1504056	3.70%
1200457	GA	-	102	POLYMER COMPOUND BLUE	2004072	2.30%
2004570	GA	AA	101	PS TAMPON COMPOUND CREAM	2004570	1.70%
PART NO	REV/N/P	TYPE	MATERIAL SPECIFICATION AND COLOR		MATING CONNECTOR	VOL CM ³

- NOTES
1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
DIMENSIONS ARE TO BE MAINTAINED BY COMPUTER FOR INSPECTION.
USE MATH MODEL FOR PRECISE DIMENSIONS, FOR ALL
OTHER DIMENSIONS NOT TO BE MAINTAINED BY
COMPUTER, USE MATH MODEL FOR PRECISE TOOL PATH DATA.
DRAWING IS NOT TO BE USED AS A BASIS FOR
CONSTRUCTION.
 2. TENSILE WELD WITHIN A MINIMUM RESISTIVE FORCE OF
89 N (20 LBS).
 3. RECOMMENDED: BODY MATERIAL: POLYESTER OR EQUIVALENT
REINFORCING: PLASTIC
 4. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM. MINOR
DEFECTS ARE ACCEPTABLE. DEFECTS ARE ACCEPTABLE FOR COLORED
SURFACES. DATE VERIFIED: 06/07/94. DATE THAT IS NOT AT THE
END OF THE DRAWING IS NOT TO BE USED AS A BASIS FOR CONSTRUCTION. 05-01

3		4		5		6	
SYMBOL DEFINITION		MISSING NUMBERS		ON 1-15	ON 16	POLYMER SYSTEM	
A DISPOSITION WITHOUT AN IMPROVED PROTECT SYMBOL () DOES NOT REQUIRE IMPROVEMENT. IT MAY BE CONTROLLED ON AN INDIVIDUAL COMPONENT DRAWING.	TYPICAL NO. OF SYMBOLS ON DRAWING	1-6					
				ON 1-15	ON 16		
				ON 1-15	ON 16		
				ON 1-15	ON 16		
				ON 1-15	ON 16		
LAST NO. USED	194						

[illegible]

1502102