| SYMBOL DEFINITION | | |
|---|---|---|
| A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ( ) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING. | TOTAL NO OF INSPECTIONS REQUIRED | 24 |
| | LAST NO. USED | 12 |

| MISSING SYMBOLS |
|---|
| 10 |

| DWG STATUS DATE | STG | REV | N/P | CHG | ZONE | REVISION HISTORY | AUTH | DR | APVD 1 | APVD 2 |
|---|---|---|---|---|---|---|---|---|---|---|
| 11N002 | R | 01 | - | - | | RELEASED | 232695 | JVM | JVM | BMD |
| 18DE02 | R | 02 | - | - | | ADDED DIM #11; REMOVED RECYCLE CODE; REMOVED RADIUS (3 PLCS); MOVED DELPHI LOGO; DIM #2 WAS 6X R.2 TYP; DIM #5 WAS 2X 15.56; REVISED NOTE #4; REVISED LOCK ARMS; MADE DIM #11 PROCESS SENSITIVE DIM | 234870 | EES | EES | MD6 |
| 11AP03 | R | 02 | AA | - | | ADDED 6.88 DIM AND PROCESS SENSITIVE DIM WAS 11 | 239554 | TLD | TLD | MD |
| 15OC03 | R | 02 | AB | - | | UPDATED PDM ATTRIBUTES | 247477 | ADK | BB | AAD |
| 02MR04 | R | 02 | AC | - | | REMOVED DIM 11 PLCS | 252420 | JTZ | JAA | MD |

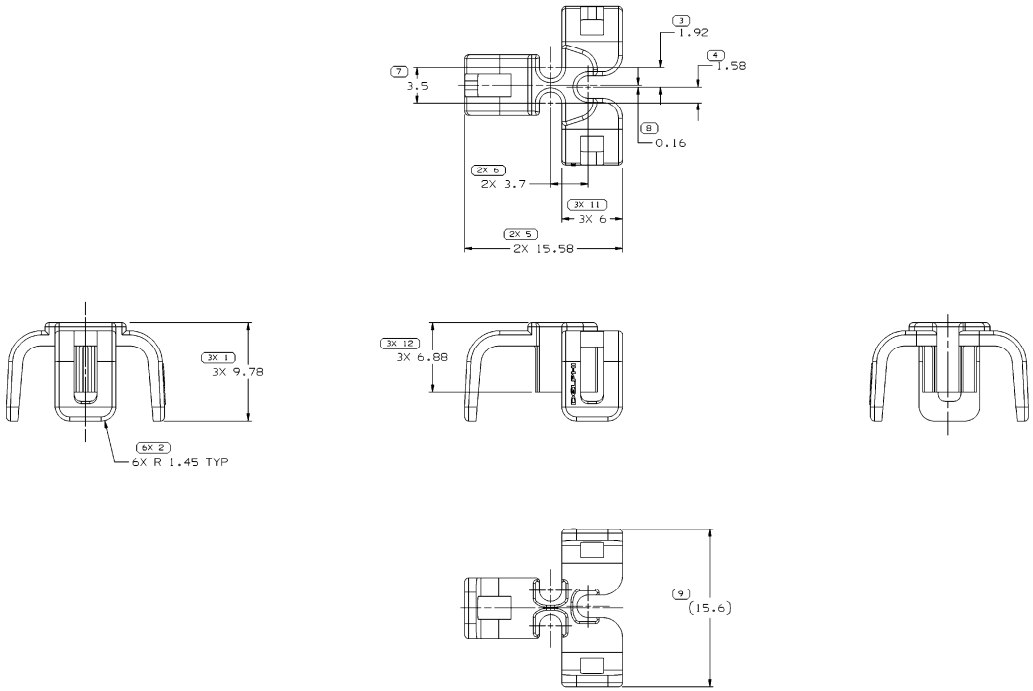


NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.

2. THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.

3. MATERIAL RECYCLING CODE PER ISO 11469. (0.52)X(0.1) RAISED CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.

4. (0.41)X(0.1) RAISED DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION TO BE "PED" OR NO LOGO.

R 0.1 MAX
R 0.2 MAX
SHARP CORNER TOLERANCE

| DIMENSIONAL RANGE (MM) | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| FROM | > 0 | > 20 | > 30 | > 70 | >100 | >150 | >200 | >250 | >300 | CHART F1 |
| TO | 20 | 30 | 70 | 100 | 150 | 200 | 250 | 300 | 400 | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | | | | | | | | | |
| | ±0.15 | ±0.2 | ±0.3 | ±0.4 | ±0.5 | ±0.6 | ±0.8 | ±1 | ±1.2 | |
| ANGULAR TOLERANCE ±2° | | | | | | | | | | |

(12) PROCESS SENSITIVE DIMENSION

DIMENSIONS ENCLOSED IN ( ) INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED

DWG TYPE: PART DRAWING
STYLE
VOLUME (CM³): 0.323
DISTR CODE
ROUTING: 6901

UNLESS OTHERWISE SPECIFIED

THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE GM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES AND RELATED DATUMS APPLY RFS. RULE #1(PERFECT FORM AT MMC) DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE FEATURE CONTROL FRAMES MAY BE OMITED SEPARATELY. DRAWING REFERENCE DATUMS.
ALL DIMENSIONS ARE IN MILLIMETERS

REFERENCE

THIRD ANGLE PROJECTION

DO NOT SCALE
USE MATH DATA

UGS UNIGRAPHICS

DELPHI
DELPHI PACKARD ELECTRIC SYSTEMS
WARREN, OH

| | DATE |
|---|---|
| DR | |
| APVD1 J. VILLAMIL | 11N002 |
| APVD2 J. VILLAMIL | 11N002 |
| APVD3 MATTHEW BRUMBACH | 14N002 |
| APVD4 | |
| APVD5 | |

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001

MATERIAL
M2279025 PA66 GF14 HS IM GRA MED

DRAWING NAME
LOCK TPA GT ISO 3 GRA MD

DRAWING NUMBER
15452678

| SIZE | SCALE | FRAME NO | SHEET NO | STG | REV | N/P |
|---|---|---|---|---|---|---|
| A1 | 5:1 | 1 OF 1 | 1 OF 1 | R | 02 | AC |