SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ( ) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	26
	LAST NO. USED	14

MISSING SYMBOLS: 10

DWG STATUS DATE	STG	REV	N/P	CHG	ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
23JL02	R	B2	-	-		REDRAWN TO PD, MAT'L SPEC WAS R00717B4 PA66 HS IM GRA MD, ADDED MAT'L RECYCLING CODE AND DELPHI LOGO & ADDED NOTES (2 PLCS)	227762	RVP	RVP	ET
24OC02	R	B3	-	-		5X 7.2 +0.15/-0.3 WAS 5X 7.2 ±0.15	232533	JAN	JAN	ET
29OC02	R	B4	-	-		5X 7.2 +0.15/-0.4 WAS 5X 7.2 +0.15/-0.3 AND REMOVED DIM	232770	RH	RH	ET

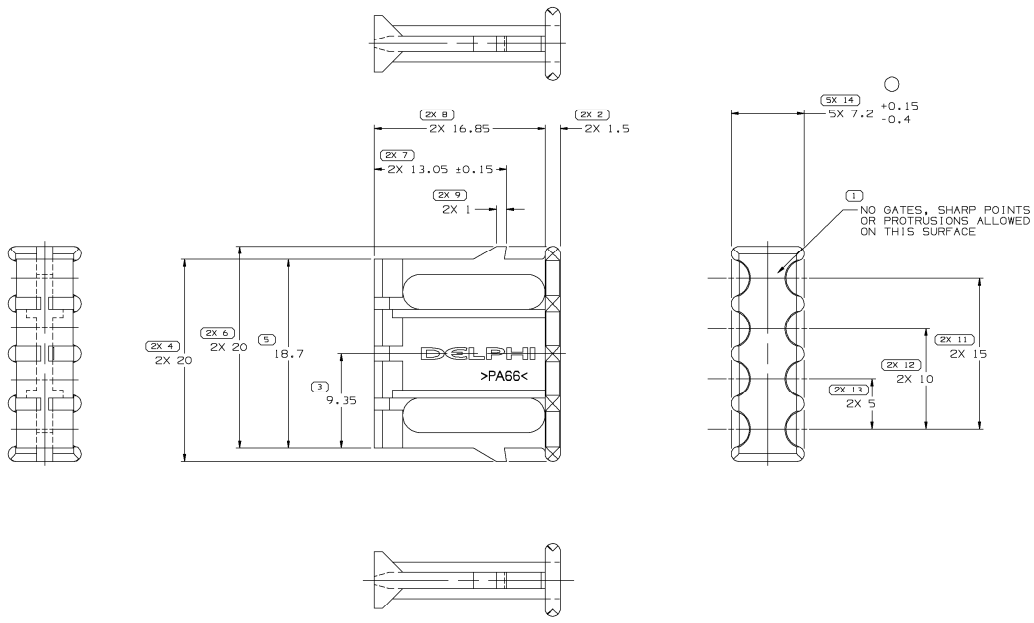

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
   ALL RADII 0.4
   LOCKING FEATURES ARE IDENTICAL
2. MATERIAL RECYCLING CODE >PA66< PER SAE J1344. (2.3)X(0.1) RAISED CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.
3. THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.
4. MATING COMPONENTS OR EQUIVALENT:
   CONNECTOR 12065140
5. (2.3)X(0.1) RAISED DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION TO BE "PED" OR NO LOGO.
6. PART IS SYMMETRICAL ABOUT ITS CENTERLINE.

R 0.1 MAX
R 0.2 MAX
SHARP CORNER TOLERANCE

DIMENSIONAL RANGE (MM) FROM	TO	CHAM	FI
0	20	±0.15	±0.2
>20	30	±0.3	±0.4
>30	70	±0.4	±0.5
>70	100	±0.6	±0.8
>100	150	±0.8	±1
>150	200	±1	±1.2
>200	250	±1.2	±1.5
>250	300	±1.5	±2
>300	400	±2	±2.5

TOLERANCE UNLESS OTHERWISE SPECIFIED
ANGULAR TOLERANCE ±2°

(5) PROCESS SENSITIVE DIMENSION
DIMENSIONS ENCLOSED IN ( ) INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED

DWG TYPE: PART DRAWING
STYLE:
VOLUME (CM³): 0.680
DISTR CODE:
ROUTING: 6900

UNLESS OTHERWISE SPECIFIED
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE ON GLOBAL DIMENSIONING AND TOLERANCING STANDARD FOR TYPE, SIZE, GEOMETRIC TOLERANCES RELATING DATUMS AND TYPES. TOLERANCE ZONE FORM AT MMC, RFS, MIC AND ↗ MAIN DEFAITHOUGH BETWEEN FEATURE IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE GAGED SEPARATELY, REGARDLESS OF DATUM REFERENCE.
ALL DIMENSIONS ARE IN MILLIMETERS

REFERENCE

THIRD ANGLE PROJECTION
DO NOT SCALE
USE MATH DATA
UNIGRAPHICS

DELPHI
DELPHI PACKARD ELECTRIC SYSTEMS
WARREN,OH

	DATE
DR	
APVD1 J.M. SOVA	10SEP5
APVD2 F. HESTON	24JA86
APVD3 W.E. CROSS	28JA86
APVD4	
APVD5	

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001

MATERIAL: M3592025 PA66 HS IM GRA MD

DRAWING NAME: LOCK TERM LK TPA 8 GRA

DRAWING NUMBER: 12065141

SIZE	SCALE	FRAME NO	SHEET NO	STG	REV	N/P
A1	5:1	1 OF 1	1 OF 1	R	B3	-